

Received by PDS Friday 10.20.2023



JOHNSON COUNTY, IOWA

APPLICATION FOR: ZONING AMENDMENT

Application is hereby made to	:					
☐ X Reclassify certain p	operty on the Jo	hnson County Zoning Map.				
☐ Amend the text of the Johnson County Unified Development Ordinance (UDO)						
For Map Changes – Comple The property to be rezoned is E 1/2 SE 1/4 sec 1, tmp 77N	located at (street	address if available or layman's description):				
Parcel Number(s) (legal descr	iption must also be	e attached): 18-01-476-001 18-01-401-003				
The area to be rezoned is com	prised of	total acres.				
Current Zoning Classification	s): <u>A</u>	Proposed Zoning Classification(s): RE				
The undersigned affirms that the affirms that the owner(s) of the	PLE information provide property described consent for the office	LEASE PRINT OR TYPE led herein is true and correct. If applicant is not the owner, applican on this application consent to this application being submitted, and ce of Johnson County Planning, Development, and Sustainability to				
Name of Owner		Name of Applicant (if different)				
Applicant Street Address (inclu	ıding City, State, Zi	ip)				
Applicant Phone Applicant Signature	Applicar	nt Email				

See back page for Application Submittal Requirements and Checklist

The following items must be submitted for the application to be complete. Incomplete applications will be returned and will not be considered until the next submission deadline. If working with an engineer who can provide CAD or GIS line work, electronic submissions should be submitted in accordance with the PDS department's electronic submission guidelines (see below). Preference is that electronic submission is provided prior to hard copy submission, or the day after the posted submission deadline.

<u>Initial each item below</u> to confirm that you are aware of the submittal requirements for an application to be considered complete.

For Text Amendments - Complete This Section:

	A brief cover letter explaining the requested code change and outlining the reasoning of why the change is being requested.
	The proposed code changes indicating the specific sections and wording to added, deleted, and/or changed. This must be in a format which staff can clearly and accurately interpret and translate into official ordinance amendment format (Contact the office with questions or for more detail).
	Application Fee (\$750) is due at the time of submittal.
	(Optional) Any other supporting information the applicant wishes to submit.
For Ma	p Changes – Complete This Section
	A brief cover letter explaining the application and outlining the intended end use. If the request includes multiple proposed zoning classifications, the letter should include a breakdown of the number of acres being changed by zoning designation requested.
	Resolution Affirming the Stability of the Road System (signed and notarized).
	Ten (10) copies of the rezoning exhibit (and any other sheets larger than 11x17).
	The names and addresses of owners of all property within five hundred (500) feet of the parcel(s) being rezoned.
	A map of sufficient size to show the property for rezoning out-lined in red and the property within 500 feet of the property for rezoning outlined in blue.
	Application Fee (due at submittal - varies based on nature of application). Fee submitted:
	Proof of application to Johnson County Public Health for a Public Health Zoning Application.
X	For requests to rezone to RE:
	• Completed "Application Checklist for Utility-Scale Solar Systems (Supplemental Conditions), accompanied by all information outlined on said checklist.

(Optional) Electronic Submission Requirements – If an electronic submission of a rezoning exhibit is being submitted,

• Electronic Submission (as outlined below) is required for requests to rezone to RE.

it should conform with the following:

Electronic or digitized copy of the CAD line work or GIS geodatabase in .dwg format (.dxf is also acceptable if .dwg is not an option. No .zip files will be accepted). Any other materials should be in .pdf format.

- Submission must be saved in AutoCAD 2017 or older format.
- Submissions must use Coordinate System: NAD 1983 StatePlane Iowa South FIPS 1402 Feet
- If applicable, submission <u>should</u> include information for Sensitive Areas Analysis/Mapping and Stormwater/Soil Erosion Control infrastructure on the site. This includes any limits of disturbance or other impact areas.
- Submission should NOT include legends, legal descriptions, location maps, signature blocks, etc.



JOHNSON COUNTY, IOWA 2022 12 27 FOR CONIFER LONE TREE PROJECT APPLICATION CHECKLIST FOR UTILITY-SCALE SOLAR SYSTEMS (SUPPLEMENTAL CONDITIONS)

Lone Tree Solar Project	Ms. Cynthia Schuchner	
Name of Project	Name of Applicant Primary Contact	

The following items must be submitted for the Conditional Use Permit or rezoning application to be complete. Incomplete applications will be returned and will not be considered until the next submission deadline. Electronic submissions should be submitted prior to hard copy delivery. In all cases, electronic submission is due by 12 p.m. (noon) local time the day after the posted submission deadline. <u>Initial each item below</u> to confirm that you are aware of the submittal requirements for an application to be considered complete. For all items, if you have questions, the contact is Johnson County Planning, Development and Sustainability, unless otherwise marked.

- Clearly indicate setbacks for all structures (including arrays) from all external parcel boundaries of the project.
- C 5 Description of the Security Fencing.
- <u>c S</u> Description of the Panel Clearance Height in compliance with the supplemental conditions.
- Provide a list of all state and local public roads to be used within Johnson County to transport equipment, parts and materials for construction, operation or maintenance of the solar energy system and related components. (The approving authority will determine whether a Public Roads Damage Avoidance and Mitigation Plan will be required.)
- One (1) copy of or inclusion in the application of the **Ground Cover Standards** in compliance with the supplemental conditions.
- One (1) copy of or inclusion in the application of any Landscaping Buffer Plans. (Determination of screening requirements will be made by the approving authority as part of the review and approval process.)
- One (1) copy of the **Agricultural Impact Mitigation Plan** including but not limited to the Project Overview, Top Soil and Preservation Plan, Construction Best Management Practices, Drain Tile Identification, Sensitive Areas Protection, in compliance with the supplemental conditions.
- <u>CS</u> Description of Glare Mitigation in compliance with the supplemental conditions.
- Site Plan in compliance with the supplemental conditions.
- One (1) copy of the Operations and Maintenance (including Emergency Operations Procedures) in compliance with the supplemental conditions.
- One (1) copy of the **Decommissioning and Site Reclamation Plan** (including Licensed Engineer estimates) in compliance with the supplemental conditions.
- One (1) copy of the **Draft Performance Agreement** and estimated, itemized cost of decommissioning.
- One (1) copy of the completed **Sensitive Areas Analysis** in compliance with the Sensitive Areas Ordinance, or an <u>approved</u> waiver.
- One (1) copy of the **Stormwater Management Plan** (including soil erosion and sediment control) in compliance with the Stormwater Management regulations, or an <u>approved</u> waiver.
- **NOTE:** If the project also proposes and/or includes onsite battery energy storage, certain additional supplemental information will be required related specifically to that use (see subsection 8:1.23.D1). A separate Conditional Use Permit application is required if the solar project is seeking conditional use permit approval on a property located in an A-Agricultural zoning district.



For Office Use Only:
ZONING NUMBER: _____

Johnson County Public Health

855 S. Dubuque Street Suite 217 * Iowa City, Iowa 52240 * 319/356-6040 * Fax: 319/356-6044

Johnson County Public Health Zoning Application

Applicant Name:	Phone Number:			
Cynthia Schuchner	(832) 955-1979			
Address:	City:		State:	Zip:
1334 Brittmoore Rd. Suite 2407	Houston		TX	77043
NOTE: THIS APPLICATION NEED NOT BES	SUBMITTED FOR FINAL	PLATS.		
Type of Zoning Request:	,	Application	FEE:	
$\overline{\mathbf{X}}$ Zoning reclassification from $\underline{\mathbf{A}}$ to $\underline{\mathbf{RE}}$;	\$75.00 Applica	ation Fee	
Combined preliminary and final plat	\$50.00 +	+ \$20.00 per L	Lot Applica	ation Fee*
☐ Preliminary plat using private onsite/centralized waste water sys	tems \$50.00 +	+ \$20.00 per L	Lot Applica	ation Fee*
☐ Conditional Use Permit	:	\$25.00 Applica	ation Fee	
		*Out	lots Exer	mpt
Application Fee <u>\$75.00</u> + Lo (Number of lots <u> </u>	tlots = x <u>\$20</u>		Lot)	
PLEASE RETURN THIS APPLICATION AND APP	PROPRIATE APPLICATIO	N FEE TO:		
JOHNSON COUNTY PUB 855 S. DUBUQUE STREE I OWA CITY, I A 5	T SUITE 217			
The application and fee must be received by the department Zoning commission public hearing and/or the John				
No refund shall be made of any required fee accompanying a	red application once fi	led with the a	administra	tive officer.
Signature of Applicant:	Da	ate: <u>12/27/22</u>		



For Office Use Only:
ZONING NUMBER: _____

Johnson County Public Health

855 S. Dubuque Street Suite 217 * Iowa City, Iowa 52240 * 319/356-6040 * Fax: 319/356-6044

Johnson County Public Health Zoning Application

Applicant Name:	Phone Number:			
Cynthia Schuchner	(832) 955-1979			
Address:	City:		State:	Zip:
1334 Brittmoore Rd. Suite 2407	Houston		TX	77043
NOTE: THIS APPLICATION NEED NOT BE	SUBMITTED FOR FINAL PL	.ATS.		
Type of Zoning Request:	A	PPLICATION	FEE:	
▼ Zoning reclassification from A to RE	\$7	75.00 Applic	ation Fee	
Combined preliminary and final plat	\$50.00 +	\$20.00 per	Lot Applic	ation Fee*
☐ Preliminary plat using private onsite/centralized waste water sys	tems \$50.00 +	\$20.00 per	Lot Applic	ation Fee*
☐ Conditional Use Permit	\$2	25.00 Applic	ation Fee	
		*Out	lots Exe	mpt
Application Fee <u>\$75.00</u> + Le (Number of lots Minus Number of Out = Enclosed Fee <u>\$</u>	tlots = x <u>\$20.</u>		Lot)	
PLEASE RETURN THIS APPLICATION AND APP	PROPRIATE APPLICATION	FEE TO:		
JOHNSON COUNTY PUB 855 S. DUBUQUE STREE I OWA CITY, I A 5	T SUITE 217			
The application and fee must be received by the department Zoning commission public hearing and/or the John				
No refund shall be made of any required fee accompanying a	red application once file	d with the a	administra	ative officer.
Signature of Applicant:	Date	e: 02/09/23		

This page removed by information.	PDS as it cont	ained sensitive	financial



October 20, 2023

Mr. Nathan Mueller Johnson County Planning, Development, and Sustainability 913 S. Dubuque Street, Ste. 204 Iowa City, IA 52240-4273

Re: Application for Zoning Amendment, Lone Tree Solar Project, Johnson County, Iowa

Dear Mr. Mueller,

PCR Investments SP2 LLC (PCR) prepared this application package for the Lone Tree Solar Project in Johnson County, Iowa (project or project area), a proposed utility-scale solar energy facility to be located in Johnson County on land currently zoned as Agriculture (A). This application is being submitted in accordance with the requirements of the Johnson County Unified Development Code (UDO) and the Johnson County Zoning Ordinance (8.1.23BB [Utility Scale Solar Developments]) (zoning ordinance).

The project is a proposed utility-scale solar energy facility to be located on two parcels totaling 50 acres of land located northwest of the intersection of lowa Highway 22 and Sioux Avenue SE in Johnson County (see Attachment A). The project area is currently zoned as Agriculture (A) (Parcels 1801476001 and 1801401003). With this application, PCR is requesting to reclassify the 50 acres of the proposed project area as RE-Renewable Energy on the Johnson County Zoning Map. Pursuant to the Johnson County UDO, this cover letter and application serves as PCR's letter of intent to develop, construct and operate the project in Johnson County and provides the application materials required by Johnson County for utility-scale solar development projects.

PROJECT DESCRIPTION

The Lone Tree Solar Project, a proposed 7.5-megawatt (MW) alternating current (AC) photovoltaic (PV) solar facility, will be located approximately three miles northwest of the town of Lone Tree, lowa (see Attachment A for location figure). The project will interconnect to the Lone Tree Substation, which is owned and operated by the Central lowa Power Cooperative (CIPCO). Construction of the project will be developed in a single phase and is anticipated to begin within 12 months of Johnson County permit approvals with an anticipated construction duration of 8 months and a projected Commercial Operation Date (COD) of Q2 of 2025. The project is expected to operate for approximately 30 years from COD at which time it is anticipated the project will be decommissioned.

Project Components

Solar Panels, Arrays, and Racking

The currently selected PV module is the ZXM7-SHLDD-144-550 Bifacial model, manufactured by ZNShine Solar. It has a peak power of 555.0 W, and the technology of the cells is Si-mono. Details and specifications of this module type are found in the design report included in Attachment B. The proposed panels to be used for the project (see description of project components in **Attachment B**) will have a minimum ground clearance of 23.6 inches in compliance with Johnson County requirements.

Solar panel technology is continually making advancements in both manufacturing and efficiency and the final selection of PV modules is subject to commodity pricing based on the current market demand and available stock.

The Project PV modules will be mounted on approximately 302 single-axis, galvanized steel, horizontal tracker mounting systems supported by over 2,780 steel piles. The current design consists of three power blocks and a switchgear and meter station. The number of single axis trackers varies per block but is anticipated to be approximately 100. Each power block includes 21 inverters and is connected to



approximately 5,436 PV modules. The final design will be developed during the detailed engineering phase and in accordance with the applicable National Electric Safety Code ("NESC") and National Electric Code ("NEC") provisions and any generating certificate or permit conditions.

Foundations or supports will be installed to a minimum depth of five (5) feet below the ground surface to minimize impacts from freezing and thawing conditions. Exact embedment depth for the driven pile on which the solar panels are mounted will be determined with final engineering.

Electrical Collection System

Underground 12.47 kilovolt (kV) collector circuits are proposed for the Project. Underground collector circuits are an industry standard method to route the collection cables while eliminating interference with other above ground infrastructure within the Project Area. The total length of AC collection lines installed for the Project will be approximately 0.44 mile (2,325 feet). This includes 0.34 mile (1,813 feet) of AC collection lines within the PV array connecting to the medium voltage (MV) power stations, switchgear, and metering station and a 512-foot generator tie line connecting the PV array area to the Lone Tree Substation. No overhead collector circuit runs are proposed for the Project.

Access Roads

Gravel access roads will connect the facility to existing public roads and provide access to project equipment during facility operations and maintenance as well as to accommodate emergency access. Permanent internal access roads within the project area are expected to be approximately 1.49 miles (7,890.9 feet) in total length and are approximately 12 feet wide. The permanent access road outside the project area which will provide access to the site from lowa Highway 22 is expected to be approximately 68 feet in total length and is approximately 20 feet wide.

Switchgear Room and MV Power Stations

The project is not expected to have an on-site O&M building. If a building is needed in the future to host technicians and spare parts, it will be permitted separately as it may be a more centralized building for multiple projects.

The project will use driven pier foundations and concrete foundations. The skids for the transformers, switchgears, MV power stations, and metering will likely be installed on driven pier foundations but could be placed on concrete foundations if required by soil and geotechnical conditions. The typical pier foundation will be from five (5) feet to 10 feet deep. For driven pier foundations, no excavation is required. For the concrete foundations, soil excavation quantities will be determined in the detailed engineering phase.

Foundation dimensions will be determined in the detailed engineering phase. The preliminary design includes one Switchgear Room foundation approximately 13 feet by 46 feet in size, four MV Power Stations approximately 13 feet by 25 feet in size (see Attachment B).

Security Fencing

PCR will utilize fencing around the PV solar arrays that is consistent with all applicable codes, including NEC and North American Electric Reliability Council Critical Infrastructure Protection requirements. Fencing is required to safeguard the public health. Array fencing will consist of seven-foot-high woven-wire exclusion fence with wood fence posts. Fenceposts will be driven into the ground. No concrete foundations will be used for the fence posts.



Road Use

Public roads anticipated to be used for the transport of equipment and materials for project construction, operation, and/or maintenance activities are anticipated to include Interstate 80, Iowa Highway 218 and Iowa Highway 22. These roads are depicted on a route map included in Attachment B.

APPLICATION REQUIREMENTS

This application addresses the requirements of the Johnson County Zoning Ordinance (8.1.23BB) specific to Utility Scale Solar Developments and includes:

Attachment B - Site Plan and Design Report

Pursuant to the zoning ordinance, Attachment B addresses:

- Setbacks Setbacks for all structures will adhere to setback standards for the RE-Renewable Energy zoning district which requires all structures (including panels) be set back 50 feet from property boundaries (unless a greater setback is imposed by Johnson County as a condition of zoning approval). The setbacks are depicted in the Preliminary Layout for the project provided in Attachment B.
- **Security Fencing**. A woven wire security fence at least seven (7) feet tall will encircle the boundaries of the project and is depicted on the site plan in **Attachment B**. Warning/no trespassing signs will be posted within sight of all points of the fence line or no greater than fifty (50) feet apart as required by Johnson County. At each access point, the fence will have a gate with a locking mechanism on the primary access side. Security fences, gates, and warning signs will be maintained in good condition until the project is decommissioned. More information about project decommissioning is provided below.
- Panel Clearance. The proposed panels to be used for the project (see description of project components in Attachment B) will have a minimum ground clearance of 23.6 inches in compliance with Johnson County requirements.
- Roads. PCR is currently coordinating with Johnson County and the lowa Department of Transportation (DOT) regarding the proposed access road off of State Highway 22, which has been designed in compliance with lowa DOT requirements. PCR will coordinate with the applicable agencies regarding utility right-of-way permit applications prior to construction. In addition, this attachment includes a map depicting anticipated routes to be used as part of construction, operation, and maintenance of the project and a resolution affirming the stability of the road system.
 Attachment B.

Attachment C. Adjacent Property Information

Pursuant to the zoning ordinance, Attachment C includes:

- A map depicting the requested area to be rezoned (outlined in red) and properties within 500 feet of the project (outlined in blue)
- Solar easement agreement (legal description of what will be rezoned in this request below) and a first amendment to the solar easement agreement
- Conservation Easement Agreement (see legal description below)
- Recorded Plat of Survey (see legal description below)
- Adjacent property information (Landowners within 500 feet of the project)



Legal Description of Property

LEGAL DESCRIPTION

A PART OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER OF SECTION 1, TOWNSHIP 77 NORTH, RANGE 6 WEST OF THE 5TH P.M., JOHNSON COUNTY, IOWA, MORE PARTICULARLY DESCRIBED AS; COMMENCING AT THE SOUTHEAST CORNER OF THE SAID SOUTHEAST QUARTER; THENCE SOUTH 88°32'17" WEST, ALONG THE SOUTH LINE OF THE SAID SOUTHEAST QUARTER, 1329.68 FEET TO THE SOUTHWEST CORNER OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11" WEST, ALONG THE WEST LINE OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER, 115.85 FEET TO THE NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22 AND BEING THE POINT OF BEGINNING FOR THE LAND HEREIN INTENDED TO BE DESCRIBED; THENCE CONTINUING NORTH 00°36'11" WEST, ALONG THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER, 1680.38 FEET; THENCE NORTH 88°32'56" EAST, 1296.75 FEET TO THE WEST RIGHT OF WAY LINE OF SIOUX AVENUE; THENCE SOUTH 00°36'04" EAST, ALONG THE SAID WEST RIGHT OF WAY LINE OF SIOUX AVENUE AND PARALLEL TO AND 33 FEET PERPENDICULAR TO THE EAST LINE OF THE SAID SOUTHEAST QUARTER, 1581.49 FEET; THENCE SOUTH 08°56'56" WEST, CONTINUING ALONG THE WEST RIGHT OF WAY LINE OF SIOUX AVENUE, 100.63 FEET TO THE SAID NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22; THENCE SOUTH 88°33'11" WEST, ALONG THE SAID NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22, 1279.98 FEET TO THE POINT OF BEGINNING.

WETLAND/STREAM CORRIDOR EASEMENT DESCRIPTION

A 100 FOOT WIDE WETLAND/STREAM CORRIDOR, BEING A PART OF THE SOUTHEAST QUARTER OF THE SOUTHEAST QUARTER OF SECTION 1, TOWNSHIP 77 NORTH, RANGE 6 WEST OF THE 5TH P.M., JOHNSON COUNTY, IOWA, MORE PARTICULARLY DESCRIBED AS; COMMENCING AT THE SOUTHEAST CORNER OF THE SAID SOUTHEAST QUARTER; THENCE SOUTH 88°32'17" WEST, ALONG THE SOUTH LINE OF THE SAID SOUTHEAST QUARTER, 1329.68 FEET TO THE SOUTHWEST CORNER OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11" WEST, ALONG THE WEST LINE OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER. 115.85 FEET TO THE NORTH LINE OF IOWA HIGHWAY 22: THENCE N88°33'11"E, ALONG THE SAID NORTH LINE OF IOWA HIGHWAY 22, 534.91 FEET TO THE POINT OF BEGINNING FOR THE LAND HEREIN INTENDED TO BE DESCRIBED; THENCE NORTH 40°51'12" WEST, 359.28 FEET; THENCE NORTH 59°42'29" WEST, 107.23 FEET; THENCE NORTH 50°44'21" WEST, 269.12 FEET; THENCE NORTH 14°24'28" WEST, 17.31 FEET TO THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11"W, ALONG THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER, 341.98 FEET; THENCE SOUTH 24°34'03" EAST, 104.30 FEET; THENCE SOUTH 14°24'28" EAST, 213.94 FEET; THENCE SOUTH 50°44'21" EAST, 228.47 FEET; THENCE SOUTH 59°42'29" EAST, 115.99 FEET; THENCE SOUTH 40°51'12" EAST, 458.04 FEET TO THE SAID NORTH LINE OF IOWA HIGHWAY 22; THENCE SOUTH 88°33'11" WEST, ALONG THE SAID NORTH LINE OF IOWA HIGHWAY 22. 129.42 FEET TO THE POINT OF BEGINNING.

The plat of survey was recorded with the Johnson County Auditor's Office on October 18, 2023 (see Attachment C).

Attachment D. Vegetation Management Plan

A Vegetation Management Plan was prepared to document ground cover standards as required by Johnson County. A landscape plan, if needed, will be prepared in coordination with Johnson County and affected landowners as the project moves closer to construction. Preliminary landscape screening locations are proposed on the site plan in Attachment B; however, the details of the proposed screening (i.e., species to



be planted, height, spacing, etc.) will be determined closer to construction in coordination with Johnson County.

Attachment E. Agricultural Impact Mitigation Plan (AIMP)

The AIMP identifies measures that PCR and its contractors will take to avoid, mitigate, repair, and/or compensate for potential agricultural impacts that may result from the construction, operation, and eventual decommissioning of the project. A grading plan prepared for the project is included in the AIMP.

Attachment F. Glare Hazard Analysis

A glare hazard analysis was conducted, and the results provided in Attachment F. Based on the results of this analysis, glare mitigation is not proposed; however, if needed, PCR will coordinate with Johnson County and affected landowners to develop a mitigation plan as the project moves closer to construction. The results of the glare hazard analysis indicate the project meets Johnson County requirements for glare minimization (8:1.23.BB.7).

Attachment G. Operations and Maintenance (O&M) Plan and Emergency Response Plan

PCR prepared an O&M Plan that generally applies to PCR facilities in Iowa (Attachment G). The O&M plan generally describes soil erosion and sediment controls, ground cover standards and buffer areas, and general procedures for operation and maintenance of the facilities, including maintaining safe access and ongoing maintenance and repair. Operation and maintenance of the project will be conducted in compliance with Johnson County requirements. Attachment G also includes PCR's Emergency Response Plan for the Lone Tree project.

Prior to construction, PCR or its contractors will prepare and submit a Notice of Intent (NOI) application to the Iowa Department of Natural Resources (DNR) for coverage of construction site stormwater runoff under a NPDES General Permit No. 2, per Iowa requirements. The submittal will include a copy of the completed NOI application and a project-specific Stormwater Pollution Prevention Plan (SWPPP), which will be included in the O&M Plan and provided to Johnson County once completed. A copy of the NPDES permit will be provided to Johnson County prior to any ground disturbance.

An on-site O&M building is not proposed for this project. Operation of the Lone Tree project will be monitored remotely, with onsite maintenance occurring periodically, as needed, to maintain the equipment.

Attachment H. Decommissioning Plan

The decommissioning plan describes the anticipated project timeline, project components, and decommissioning activities, site restoration, and decommissioning costs. A draft performance agreement is also included with Attachment H.

Attachment I. Sensitive Areas Analysis (Section 8:3.5 of the UDO)

A Sensitive Areas Analysis Report is provided in Attachment I and referred to in the AIMP prepared for the project (Attachment E). The results of the Sensitive Areas Analysis are summarized below.

Attachment J. Stormwater Management Plan

A stormwater management plan was prepared for the project and is included in Attachment J. In accordance with recent changes to the Johnson County ordinance, full stormwater management planning is not required for the project because the total connected impervious area for the project is less than 5,000 square feet (subsection 8:1:23:BB.12a of the UDO).



As mentioned above, prior to construction, PCR or its contractors will prepare and submit an NOI to the lowa DNR for coverage of construction site stormwater runoff under a NPDES General Permit No. 2, per lowa requirements. The submittal will include a copy of the completed NOI application and a project-specific Stormwater Pollution Prevention Plan (SWPPP), which will be included in the O&M Plan and provided to Johnson County once completed. A copy of the NPDES permit will be provided to Johnson County prior to any ground disturbance.

Attachment K. Erosion Control Plan

An erosion control plan was prepared for the project and is included in Attachment K.

ADDITIONAL INFORMATION

Sensitive Areas Analysis

A Sensitive Areas Analysis was conducted for the project (Attachment I). The results include:

- No critical wildlife habitat is present within the project area.
- No bat habitat is present within the project area given the lack of trees.
- The project is not located within a 100-year floodplain or floodway.
- A Phase I archaeological survey was conducted for the project. No further cultural resources investigations were recommended as a result of that survey.
- No prairies or prairie remnants, savannas, or woodland communities are located within the project area.
- A review of topographical data available for the project did not identify any critical slopes (slopes within a grade of 25 to 35 percent) or protected slopes (grades exceeding 35 percent).
- Approximately 0.43 acre of wetland and one unnamed tributary to Otter Creek was identified within the project area.

Public Health Zoning Application

An application to the Public Health Department was filed on December 6, 2022; however, the application fee is currently being refunded because the project does not include septic or sanitary sewer construction. PCR is currently coordinating with Johnson County to ensure this process is documented to meet Johnson County requirements.

Compliance with Local, State and Federal Regulations.

The project will comply with applicable local, state, and federal laws and regulations.



I appreciate Johnson County's review of this application and attachments and look forward to continuing to work with you through the application process.

Sincerely,

Cynthia Schuchner

Attachments

- A. Project Location Map
- B. Project Components, Detailed Site Plan, and Road Use
- C. Adjacent Property Information and Plat Map
- D. Vegetation Management Plan
- E. Agricultural Impact Mitigation Plan
- F. Glare Hazard Analysis
- G. Operations and Maintenance Plan
- H. Decommissioning Plan and Draft Performance Agreement
- I. Sensitive Areas Analysis
- J. Stormwater Management Plan
- K. Erosion Control Plan



Attachment A: Project Location Map






Attachment B: Project Components, Detailed Site Plan, and Road Use

LONE TREE PROJECT

Lone Tree, IOWA

SITE PLAN

		Lone Tree S	Solar Project		
MW ac	MW dc	ratio	MWh/y	Capacity factor [%]	Acres
7,50	8,97	1,20	15338	23.35	50

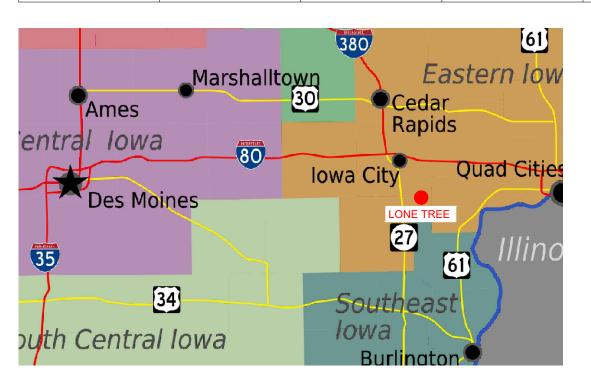





Contact Information					
Mariano Brandi	CEO	mbrandi@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en		
Cynthia Schuchner	Chief Construction and Engineering Officer	cschuchner@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en		


04							
03							
02							
01							
00	10	0/17/23	Preliminary				
Rev.	Date	(MM/DD/YY)		COMMENTS			
			REVISIO	ONS			
					₩.	יכא	
Proje	ect:	LONE TRE	E				
Sect	or:	JOHNSON	I, IOWA, USA				
Own	er:	PCR INVE	STMENTS SP2 LLC				
Title		SITE PLA	N			Sheet:	01_08
Utilit	y:	CIPCO				Scale	Rev:
File:		Site Plan L	one Tree v11.dwg				
			∢				




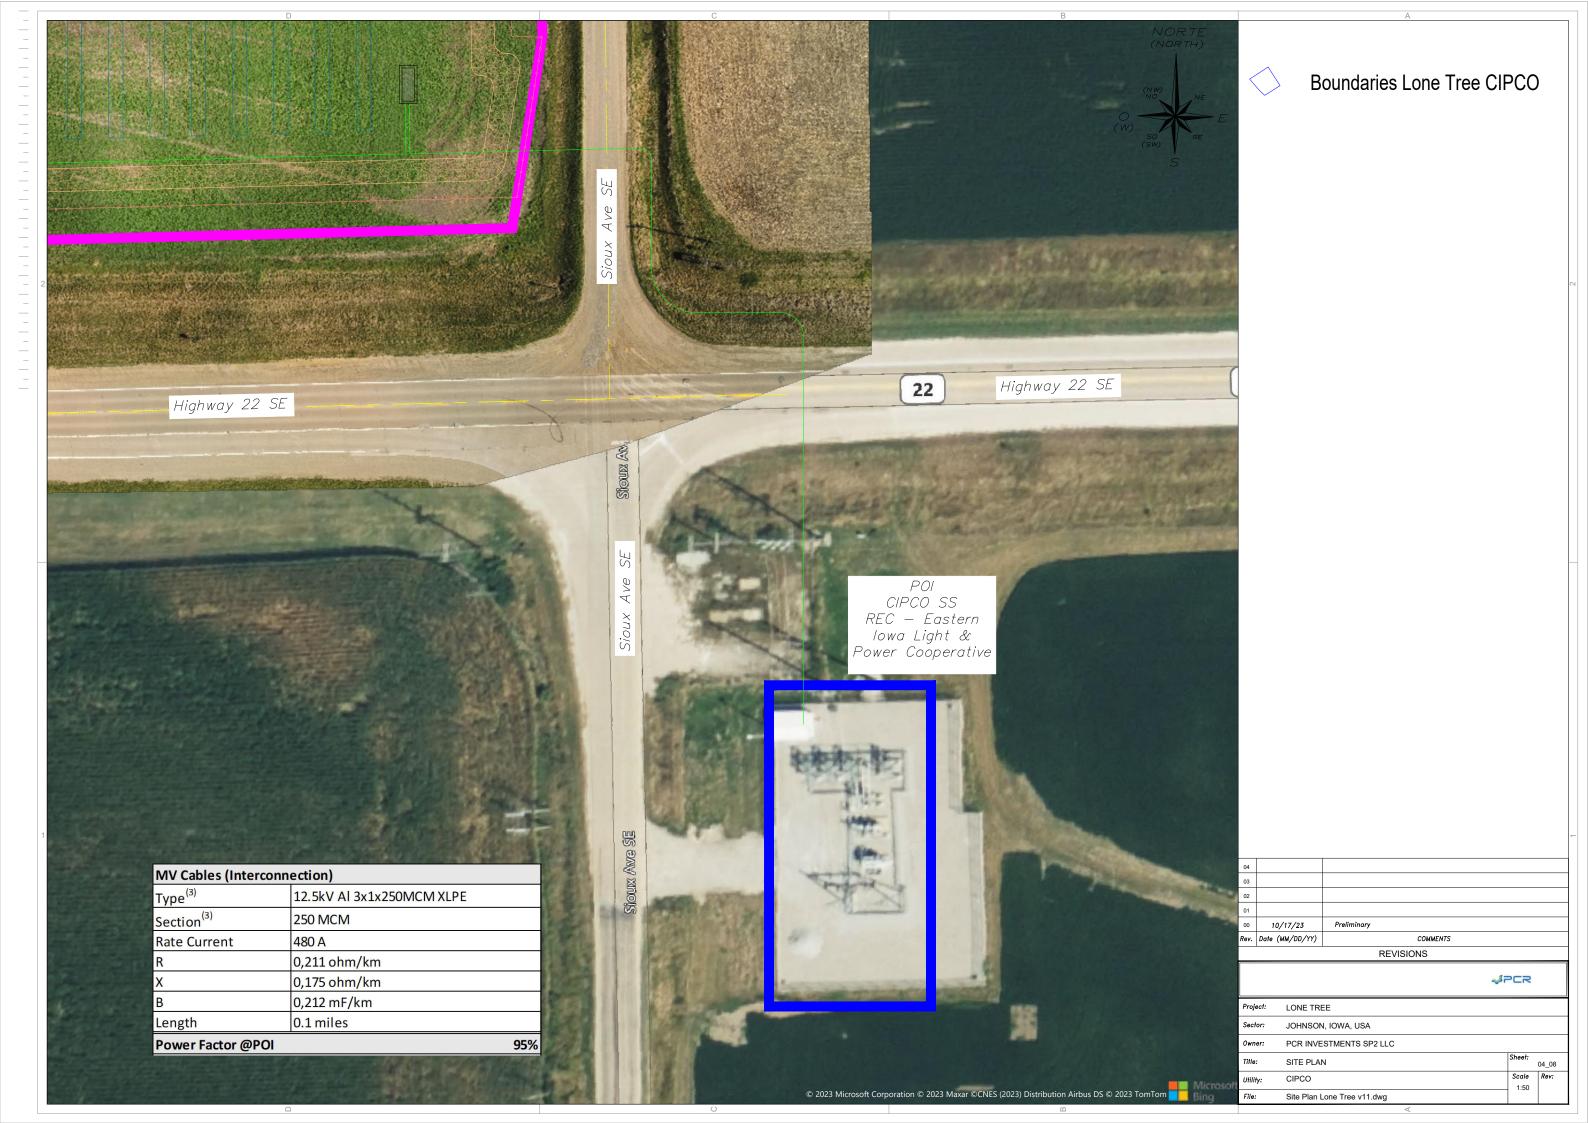

NORTE (NORTH) Angle min., * Angle max., ° Distribution, % Color 0.00 0.00 10.25 0.00 1.75 84.28 1.75 3.50 4.13 3.50 5.25 0.90 5.25 7.00 0.26 7.00 8.75 0.11 8.75 10.50 0.06 10.50 12.25 0.02 12.25 14.00 0.00 14.00 55.00 0.00 10/17/23 Rev. Date (MM/DD/YY) COMMENTS REVISIONS **₩**PCR Project: LONE TREE JOHNSON, IOWA, USA PCR INVESTMENTS SP2 LLC Sheet: ____05_08 SITE PLAN Scale Rev: 1" = 200' CIPCO Site Plan Lone Tree v11.dwg

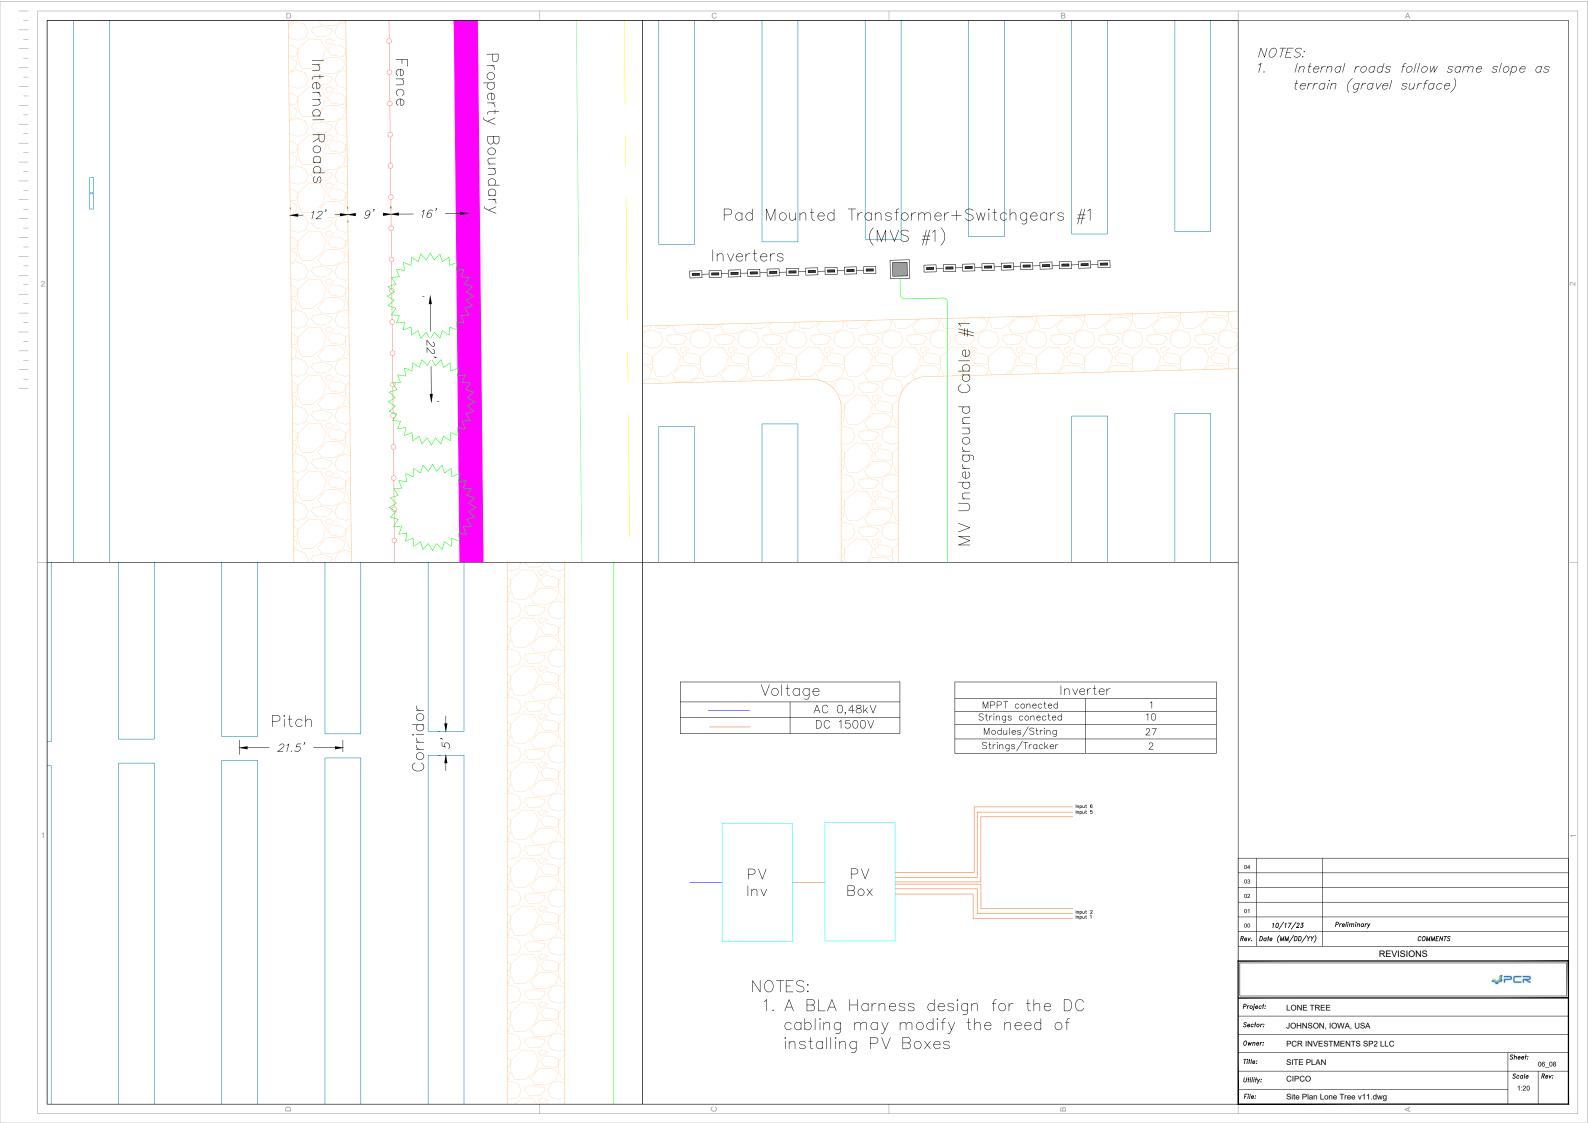

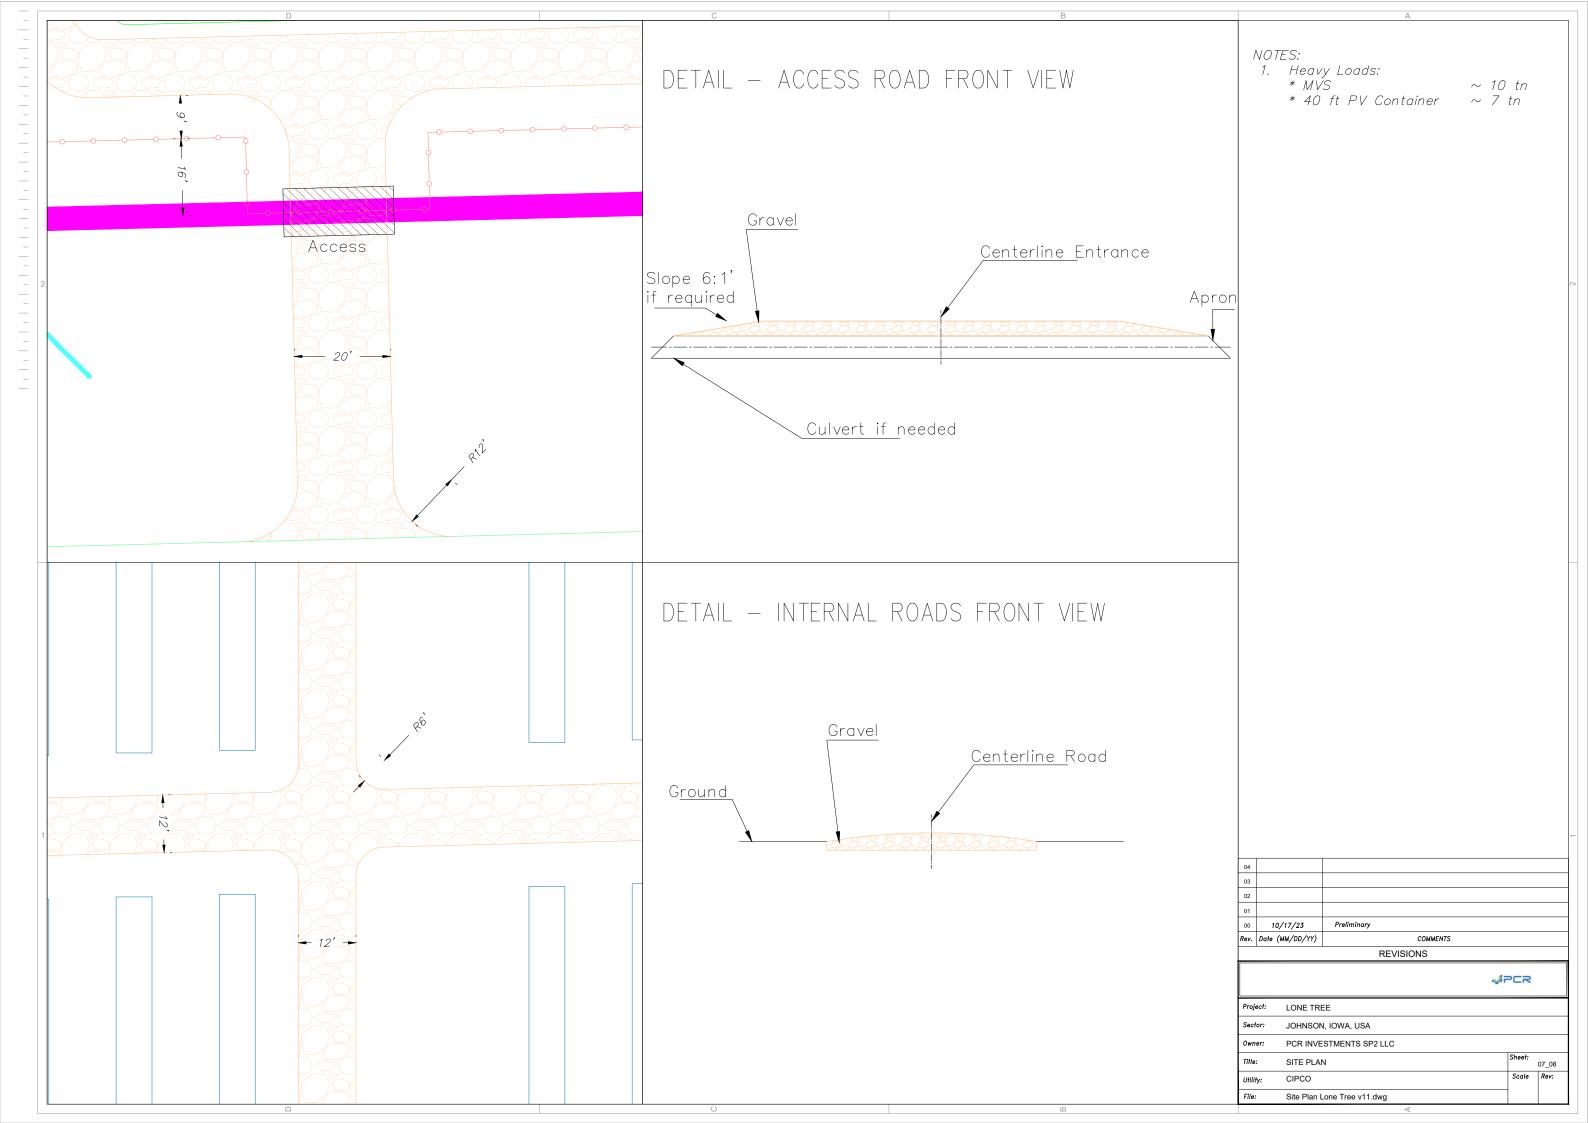

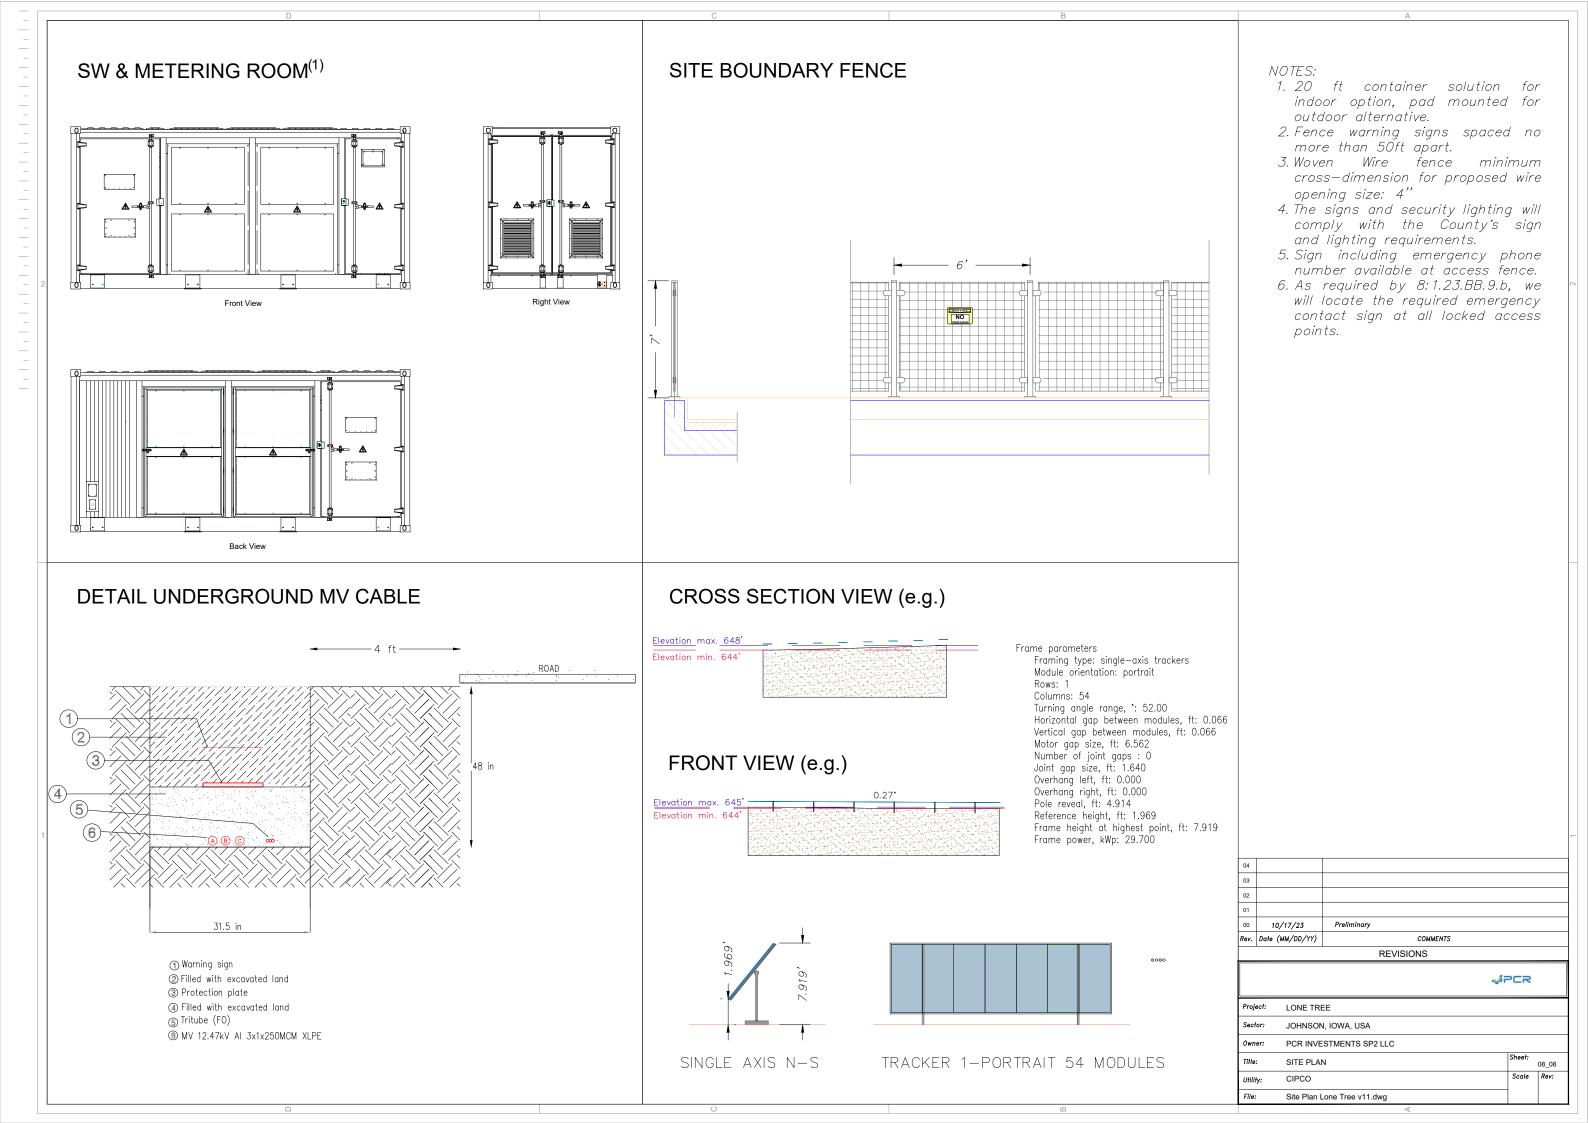





Project Description

Lone Tree PV Plant

Prepared for: PCR

10/18/2023

TABLE OF CONTENTS

1. INTRODUCTION

2. SITE

- 2.1. Location
- 2.2. Plot Areas
- 2.3. Horizon profile

3. SOLAR RESOURCE

4. MAIN EQUIPMENT

- 4.1. Photovoltaic module
- 4.2. Single axis N-S tracker
- 4.3. String combiner box
- 4.4. Central inverter
- 4.5. Power transformer
- 4.6. Switchgear Room

5. PV PLANT SIZING

- 5.1. Electrical configuration
- 5.2. Electrical Cabling Design
- 5.3. Civil works

1. INTRODUCTION

The objective of this report is to describe the specifications and design of the solar photovoltaic plant Lone Tree. The current description of the project could be subject to changes in the next stages of the project development.

The rated power of the PV Plant is 7.5 MWac and the peak power is 8.97 MWdc resulting in a DC/AC ratio of 1.196. The main characteristics of the project are shown in Table 1.

Table 1. Project Characteristics

Lone Tree Solar Project				
Main characteristics				
Location	Johnson County, Iowa			
Rated power (AC)	7.50 MWac			
Peak power (DC)	8.97 MWdc			
Ratio DC/AC	1.196			
Civil characteristics				
Suitable plot area	50 acre			
Ground coverage ratio (GCR)	21.85 %			
Structure type	One-axis tracker			
Pitch distance	21.5 ft			
Electrical characteristics				
PV Modules (550.0 Wp)	16308			
MV station (up to 3 MVA)	3			
Number of inverters (up to 125 kVA)	62			

The general layout of the PV plant is shown in Figure 1.



Figure 1. General layout

2. SITE

2.1. Location

The PV Plant location has the characteristics shown in Table 2

Table 2. Location characteristics

PV F	Plant location characteristics
City / Town	SE Johnson County, Iowa near Lone Tree
Region	Iowa
Country	United States
Latitude	41.498679°
Longitude	-91.485875°
Altitude	644 ft
Timezone	UTC -6

The project location is shown in Figure 2. A closer view of the region is shown in Figure 3.



Figure 2. Location of PV Plant in the region of Iowa, in United States



Figure 3. Closer view of the PV plant in the region of Iowa

2.2. Plot Areas

The area where the PV plant is to be built consists of 1 available area, with a total surface area of 50 acres. A total of 2 restricted areas are not suitable for the installation of PV modules. The final available area covers a surface of 41.8 acres.

The size of each area and the total suitable area for installation purposes is shown in Table 3.

Table 3. Size of plot areas of the project.

Area name	Surface
Available areas	
Area	41.8 acres
Restricted areas	
Area 1 – 50 ft conservation easement	1.6 acres
Area 2 – setback from property line	6.6 acres
Total area	50.0 acres

The substation (blue), property area (magenta), wetlands (cyan), and the restricted areas are shown in Figure 4.

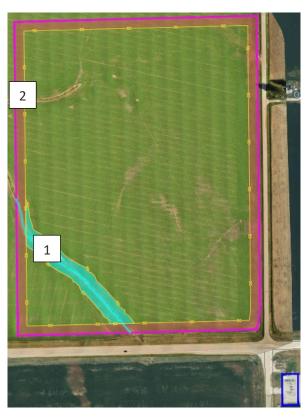


Figure 4. Plot Areas of the Lone Tree PV Plant

2.3. Horizon profile

The solar irradiance reaching the photovoltaic modules will change if there are hills or mountains on the horizon. These physical obstructions will block the beam component of the irradiance during some periods of the day and will have an impact on the diffuse component as well. Therefore, the horizon profile directly impacts the energy yield of the photovoltaic plant.

The horizon line has an average elevation of 0.5° and a maximum elevation of 1.5°. Throughout the year, the Sun will be blocked by the horizon line for a total of 57 hours. The data source for the horizon line was the PVGIS 5 database.

The blocked elevations over the complete azimuth range are shown in Figure 5.

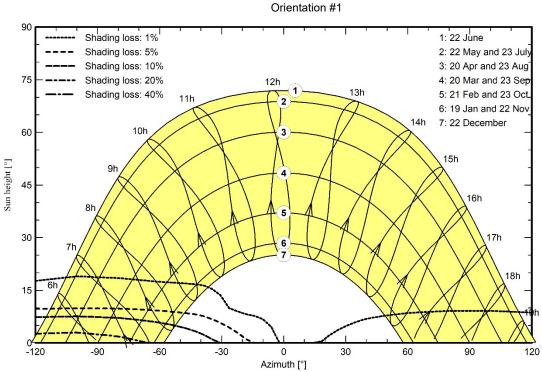


Figure 5. Horizon profile (data source: PVGIS 5)

3. SOLAR RESOURCE

The aim of the solar resource analysis is to provide an estimation of the solar energy the photovoltaic plant would receive throughout a typical year.

The solar resource is usually given as a series of hourly values for the irradiance and temperature, for a period of one year. This series is called the Typical Meteorological Year (TMY).

The source used to generate the TMY was the PVGIS database. It includes meteorological data ranging from 2005 to the present (the actual period used may vary depending on the location) and has a spatial resolution of 4 km by 4km. The uncertainty of the PVGIS data varies between $\pm 3\%$ to $\pm 10\%$, depending on the location.

The hourly temperature values found in the TMY yield the following aggregates:

Minimum temperature: -4.74 °C.

• Maximum temperature: 23.78 °C.

Average temperature: 10.45°C.

The results of the solar resource analysis are shown in Table 4.

Balances and main results

	GlobHor	DiffHor	T_Amb	Globinc	GlobEff	EArray	E_Grid	PR
	kWh/m²	kWh/m²	°C	kWh/m²	kWh/m²	GWh	GWh	ratio
January	58.6	25.76	-4.74	83.2	77.1	0.744	0.708	0.949
February	81.0	29.78	-3.26	114.1	107.8	1.027	0.979	0.956
March	121.8	46.35	4.20	164.5	159.5	1.437	1.367	0.927
April	144.2	79.40	10.85	180.3	174.7	1.558	1.415	0.875
May	175.9	84.69	17.16	224.3	216.7	1.853	1.765	0.877
June	187.6	75.63	21.70	240.4	231.6	1.942	1.849	0.858
July	192.4	84.49	23.78	250.0	244.3	2.045	1.861	0.830
August	170.3	73.44	22.47	222.7	212.8	1.801	1.717	0.860
September	131.7	52.26	18.32	178.7	174.3	1.489	1.419	0.885
October	96.0	44.21	11.55	127.6	123.4	1.101	1.051	0.919
November	60.6	26.60	4.66	83.0	77.7	0.711	0.676	0.909
December	49.4	26.72	-2.20	65.0	59.9	0.582	0.530	0.909
Year	1469.7	649.33	10.45	1933.7	1859.9	16.290	15.338	0.884

Table 4. Solar resource monthly values

4. MAIN EQUIPMENT

The main equipment used to convert the solar energy to electricity is:

- Photovoltaic modules, which convert the solar radiation into direct current.
- The single-axis tracker, which supports and orients the PV modules to minimize the angle of incidence between the incoming sun rays and the PV modules surface during the day.
- The string combiner boxes, which consolidate the output of the strings of photovoltaic modules before reaching the inverter.
- Central inverters, which convert DC from solar field to AC.
- Power Transformers, which raise the voltage level from low to medium.
- MV Stations or Power Stations, which hold the necessary equipment to convert the DC power to AC and evacuating to the desired voltage level.
- Switchgear Room, indoor medium voltage room with metering used to control, protect, and isolate the whole pv plant and inject to the grid.

The electrical configuration of the PV plant can be seen in Figure 7.

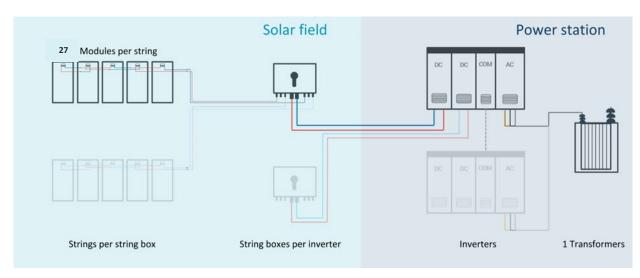


Figure 7. Simplified electrical configuration diagram

4.1. Photovoltaic module

The selected photovoltaic module is the ZXM7-SHLDD-144-550 Bifacial model, manufactured by ZNshine Solar. It has a peak power of 550.0 W, and the technology of the cells is Si-mono.

The features of the photovoltaic module are shown in Table 5.

The module has a bifaciality factor of 65.00 %.

Table 5. Photovoltaic module characteristics

Photovoltaic module characteristics				
Main characteristics				
Module model	ZXM7-SHLDD-144-550			
Manufacturer	ZNshine Solar			
Technology	Si-mono			
Type of module	Bifacial			
Maximum voltage	1500 V			
Standard test conditions (STC)				
Peak power	550.0 W			
Efficiency	21.28 %			
MPP voltage	41.90 V			
MPP current	13.13 A			
Open circuit voltage	50.20 V			
Short circuit current	13.89 A			
Temperature coefficients				
Power coefficient	-0.35 %/°C			
Voltage coefficient	-0.29 %/°C			
Current coefficient	0.050 %/°C			
Mechanical characteristics				
Length	2279mm			

Width	1134mm
Thickness	35mm
Weight	33.5 kg

An example picture of a Bifacial Si-mono module is shown in Figure 8.



Figure 8. Example of a Bifacial Si-mono photovoltaic module

4.2. Single axis N-S tracker

The PV solar modules will be mounted on North-South oriented one-axis solar trackers, integrated on metallic structures combining galvanized steel and aluminum parts, forming a structure fixed to the ground. An example of a single-axis tracker is shown in Figure 9.



Figure 9. Example of single-axis tracker

Single-axis trackers are designed to minimize the angle of incidence between the incoming sun rays and the photovoltaic panel plane of array. The tracking system consists of an electronic device capable of following the sun through the day. The main features of the tracking system are summarized in Table 6.

Table 6. Main characteristics (of the single-axis trackers	ì
---------------------------------	-----------------------------	---

	Single-axis tracker characteristics	
Model		Sky Line
Manufacturer		Arctech
Technology		Single-row
Configuration		1V

Tracking angle limits	+52 / -52 °
Number of modules per row	54 modules (maximum 60 modules)
Pitch distance	21.5 feet
Minimum ground clearance	1.97 feet

4.3. String combiner box

The string boxes collect the power generated by the DC array, connect the strings in parallel to the inverter, and provide electrical protection to the PV field. To match the number of inputs of the inverters, several parallel strings will be concentrated to function as a single circuit. Junction boxes shall be installed with a fuse per string to protect each array. Overvoltage DC dischargers will be installed, and one DC switch will be situated in the output line. Additionally, a communication system may be installed to monitor the string current and voltage.

An example of a string box is shown in Figure 10.



Figure 10. Example string box

The string boxes will be installed in a shaded area and shall be easily accessible to facilitate maintenance. They will be placed behind the PV modules and use existing structure poles if possible so that they remain shaded and prevent damage caused by rainwater or other meteorological phenomena.

4.4 String inverter

The inverter converts the direct current produced by the photovoltaic modules to alternating current. It is composed of the following elements:

- One or several DC-to-AC power conversion stages, each equipped with a maximum power point tracking system (MPPT). The MPPT will vary the voltage of the DC array to maximize the production depending on the operating conditions.
- Protection components against high working temperatures, over or under voltage, over or under-frequencies, minimum operating current, mains failure of the transformer, antiislanding protection, protection against voltage gaps, etc. In addition to the protections for the safety of the staff personnel.

• A monitoring system, which has the function of relaying data regarding the inverter operation to the owner (current, voltage, power, etc.) and external data from monitoring of the strings in the DC array (if a string monitoring system is present).

In Figure 11 a commonly used photovoltaic inverter for utility-scale PV plants is shown.



Figure 11. Example of central photovoltaic inverter

The main characteristics of the selected inverter are shown in Table 7.

Table 7. Inverter characteristics

Inverter characteristics				
Main characteristics				
Inverter model	Sunny Highpower Peak3 125-US			
Inverter type	String			
Manufacturer	SMA			
Maximum DC to AC conversion efficiency	98.5 %			
Input side (DC)				
MPPT search range	705 - 1450 V			
Maximum input voltage	1500 V			
Output side (AC)				
Rated power	125 kVA			
Power at 30 C (datasheet)	125 kVA			
Power at 50 C (datasheet)	125 kVA			
Output voltage	480 V			
Output frequency	60 Hz			

4.5. Power transformer

The power transformer raises the voltage of the inverter AC output to achieve a higher efficiency transmission in the power lines of the photovoltaic plant. An example of a power transformer is shown in Figure 12.



Figure 12. Example of power transformer

The main features of the power transformer are shown in Table 8.

Table 8. Power transformer characteristics

Power transformer characteristics		
Rated power		3000 kVA
Voltage ratio		0.48/12.47kV
Cooling system		ONAN
Tap changer		2.5%, 5%, 7.5%, 10%
Short circuit (Xcc)		0.08

4.5. Switchgear Room

The switchgear room is an indoor building or containers. An example is shown in Figure 13.



Figure 13. Example of an Indoors Switchgear Room

The switchgear room shall be supplied with medium voltage switchgears that include one transformer protection unit, one direct incoming feeder unit, one direct outcoming feeder unit and electrical boards.

The main features of the default switchgear room are shown in Table 10.

Table 10. Switchgear room characteristics

Swit	chgear room characteristics
Voltage ratio	12.47 kV
Service	Indoor

An outdoor solution could also be an alternative.

5. PV PLANT SIZING

5.1. Electrical configuration

The photovoltaic generator array consists of photovoltaic modules connected in serial and parallel associations. This configuration is defined by the module and inverter technical features, the power system requirements, and the meteorological conditions of the specific location in United States.

The methodology used to define the electrical configuration consists of sizing the strings of modules, electrical junction boxes (if present), wiring and inverters to find an electrical configuration that satisfies the DC/AC ratio goal. Some of the design criteria considered were:

- Reaching the maximum DC voltage possible, staying below the maximum rated voltage of the photovoltaic modules, 1500 V. This is done to minimize the DC power transmission losses.
- The photovoltaic generator array (DC field) is oversized with respect to the rated power of the AC system, to maximize the energy yield.

The AC system was designed to meet a power factor requirement at the substation input. The required power factor at the substation input is 0.950. To meet this requirement, it was determined that the power factor at the inverter output will be 0.932.

The main features of the electrical configuration are shown in Table 11.

Table 11. Electrical configuration characteristics

Electrical configuration character	ristics
Plant rated power	7.50 MWac
Plant peak power	8.97 MWdc
DC/AC Ratio	1.196
Modules per string	27

The medium voltage network connecting the PV plant to the substation operates at 12.47 kV. It is composed of 1 medium voltage branch.

5.2. Electrical Cabling Design

The goal when calculating the characteristics of the electrical wiring is to minimize the cable lengths and sections. The sections are selected according to the NFPA 70 National Electrical Code.

When selecting a cable cross section, the current carrying capacity, the voltage drop, and the short circuit current were considered. The maximum allowed voltage drop was 1.5% for the DC side, and 0.5% for the AC cables of the MV network.

A 1 AWG earthing cable is used for the low voltage and medium voltage trenches, while a 1/0 AWG earthing cable is used in the case of the MV stations.

A summary of the selected cable sections and their installation method is shown in Table 12.

Table 12. Summary of the selected cable sections

Section	Conducting material	Insulating material	Installation type
Strings to Inverter			
10 AWG	Cu	XHHN	Fastened to structure
12 AWG	Cu	XHHN	Fastened to structure
Inverter to PS			
350 kcmil	Al	XHHN	Buried in trench
PS to MV switchgear			
500 kcmil	Al	XHHN	Buried in trench
350 kcmil	Al	XHHN	Buried in trench

5.3. Civil works

Some of the parameters considered for the civil works required to build the photovoltaic plant are shown in Table 13.

Table 13. Civil works

Civil works		
Pitch distance	21.5 ft	
Distance between consecutive rows	5 ft	
Road width	12 ft	
LV trench maximum section	4.31 ft2	
MV trench maximum section	12.92 ft2	

For the design of the PV plant under study, roads of 12 ft have been used. These roads run a total area of 2.5 acres.

Road ditches used for drainage and for channeling water are placed on one side of the roads.

A total perimeter of 5909 ft of woven wire fence will surround the different areas of the PV plant. The fence has at least 7 ft of height and 6 ft between posts. For every 164.04 ft of the fence, a light post of 13.12 ft of height and a microwave barrier system are installed. For every 328.08 ft of the fence, a video camera post of 19.69 ft of height is installed.

Low-voltage cables from string inverters to the MV Stations have been directly buried in trenches. Various rows of cables may be included inside the same trench. Low-voltage and medium-voltage trenches are separated.

The minimum depth at which the low-voltage cables are placed is 23.62 in. These cables are horizontally in touch. The vertical separation between the low-voltage cables is 1.97 in.

A simplified trench cross section of the LV trenches is shown in Figure 14.

Trench LV Hor. Cable Separation = 0 mm LV Min. Depth of Laying = 600 mm LV Cable Separation = 50

Figure 14. Simplified LV trench cross section

The minimum depth at which medium voltage cables are placed is 27.56 in. These cables are separated horizontally by 7.87 in. The vertical separation between them is 7.87 in.

A simplified trench cross section of the MV trenches is shown in Figure 15.





Figure 15. Simplified MV trench cross section

The offset horizontal space between the cable rows and the trench boundaries is 1.97 in.

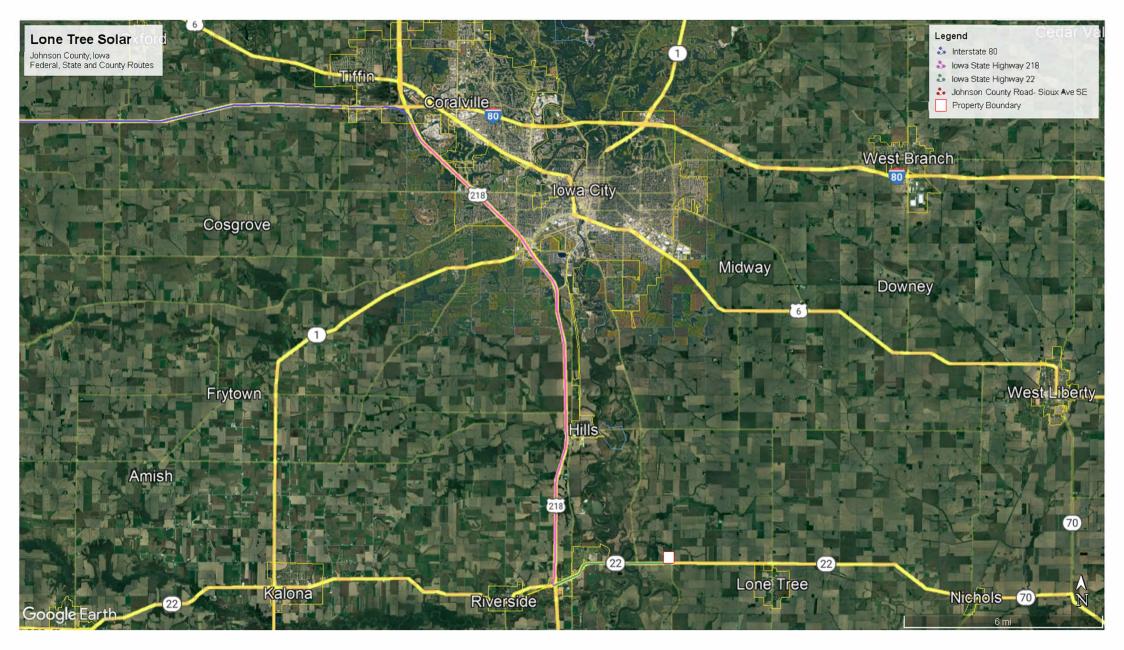

RESOLUTION 04-19-90-2 AFFIRMING THE STABILITY OF THE ROAD SYSTEM

Whereas Johnson County is one of the counties in the State of Iowa that is increasing in its population; and

Whereas there is a growing tendency for persons in Johnson County to prefer to develop lots for building purposes; and

Whereas improvement of currently non-improved roads to standards dictated by the state of lowa for Secondary roads is expensive;

Now, therefore be it resolved that any person who develops a rezoned and subdivided lot in Johnson County should first be aware of the existing secondary road conditions serving that tract of land, and should act under the presumption that said road in all probability will continue in its present condition. Private interests or adjacent landowners may underwrite the costs to bring said road up to minimum state standards which includes providing the necessary right-of-way, moving fences, grading, culverts, surfacing, and other items that may be needed to provide an improved road. These improvements can be achieved by permission of Johnson County per the **lowa Code**, Section 319.14, and by Johnson County Resolution 08-10-89-2. However, if this tract of land is located on a road that has been designated as a Level B road per Resolution 04-05-90-1, Johnson County will provide no more services than stated in Johnson County Ordinance 02-08-90-1. If possible, consideration should be given to the prospect of agreeing that said road be closed by Johnson County and maintained by the residents owning land abutting said road to county subdivision standards as a private lane.


My (our) signature on this document indicates that I have read the above road policy of Johnson County, Iowa, and understand the contents of the above shown policy, and that the zoning, or subdivision, action that is being taken by me (us) would be subject to the above Resolution by the Johnson County Board of Supervisors.

Mariano Brandi	
Signature of Owner, Contract Owner, Option Purchaser	
1334 Brittmoore rd. Houston Texas. 77043. 8329703352	
Address and Phone Number	
	anuary,
20 <u>23</u> .	
Dimma Wright	DIMMA WRIGHT Notary ID #132837858 My Commission Expires
Notary Public, in & for the State of Texas	December 22, 2024

This notarial act was an online notarization



Attachment C: Adjacent Property Information and Plat Map

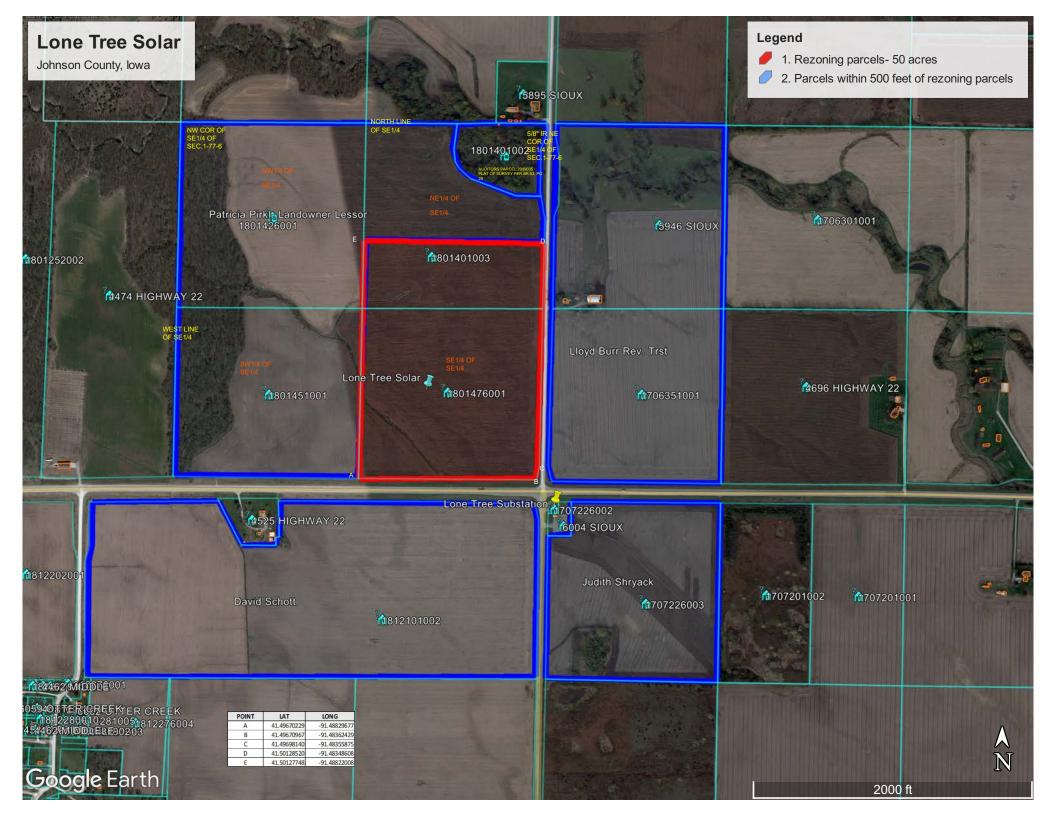

Prepared by and after recording return to: Dutmy SP 2 LLC c/o Danny Kach Litwin Kach LLP 200 N. LaSalle, Suite 1550 Chicago, IL 60601

THIS SPACE FOR RECORDERS USE ONLY

MEMORANDUM OF SOLAR EASEMENT AGREEMENT

THIS MEMORANDUM OF SOLAR EASEMENT AGREEMENT (this "Memorandum"), is made, dated and effective as of JAN 3, 2022 (the "Effective Date"), between Patricia Pirkl Revocable Living Trust (together with its successors, assigns and heirs, "Owner"), whose address is 2718 340th St. SW Tiffin, IA 52340, and Dutmy SP 2, LLC, a Delaware limited liability company (together with its transferees, successors and assigns, "Grantee"), whose address is Dutmy SP 2 LLC, c/o Danny Kach, Litwin Kach LLP, 200 N. LaSalle, Suite 1550, Chicago, IL 60601, with regards to the following:

- 1. Owner and Grantee did enter into that certain SOLAR EASEMENT AGREEMENT dated JAN 3, 202 2 (the "Agreement"), which encumbers the real property located in Johnson County, Iowa, as more particularly described in Exhibit A attached hereto (the "Property"). Capitalized terms used and not defined herein have the meaning given the same in the Agreement.
- 2. The Agreement grants, and Owner hereby grants, Grantee, among other things, (a) the exclusive right to develop and use the Property, including, without limitation, (i) for the determining the feasibility of a solar project, (ii) constructing, laying down, installing, using, replacing, reconstructing and removing from time to time, and monitoring, maintaining, repairing and operating Solar Facilities, and (iii) converting solar energy into electrical energy and collecting and transmitting the electrical energy so converted; (b) an exclusive easement to capture, use and convert the unobstructed solar flux over and across the Property from all angles and from sunrise to sunset at the Property during each day of the Term; and (c) an exclusive easement for electromagnetic, audio, visual, glare, electrical or radio interference attributable to the Solar Facilities or Site Activities.
- 2. The Agreement contains, among other things, certain Owner and third party use and development restrictions on the Property, including restrictions on mineral rights holders.
- 3. The Agreement shall be for (a) an initial due diligence period of up to one (1) year, (b) a development term of up to two (2) years, (c) a construction term of up to two (2) years, (d) an operations term of thirty (30) years, and (e) one (1) extended term of ten (10) years if the terms and conditions of the Agreement are met.
- 4. This Memorandum does not supersede, modify, amend or otherwise change the terms, conditions or covenants of the Agreement, and Owner and Grantee executed and are recording this Memorandum for the purpose of providing constructive notice of the Agreement and Grantee's rights thereunder. The terms, conditions and covenants of the Agreement are set forth at length in the Agreement and are incorporated herein by reference as though fully set forth herein. This Memorandum shall not, in any manner or form whatsoever, alter, modify or vary the terms, covenants and conditions of the Agreement.

- 5. This Memorandum shall also bind and benefit, as the case may be, the heirs, legal representatives, assigns and successors of the respective parties hereto, and all easements, covenants, conditions and agreements contained herein shall be construed as covenants running with the land.
- 6. Except as otherwise set forth in the Agreement, Owner shall have no ownership, lien, security or other interest in any Solar Facilities installed on the Property, or any profits derived therefrom, and Grantee may remove any or all Solar Facilities at any time.
- 7. This Memorandum may be executed in counterparts, each of which shall be deemed an original and all of which when taken together shall constitute one and the same document.

[signature page to follow]

IN WITNESS WHEREOF, the parties have executed this Memorandum as of the Effective Date first written above. **GRANTEE:** OWNER: Dutmy SP2, LLC Patricia Pirkl Revocable Living Trust a Delaware limited liability company By: By: Name: Name: Title: Title: STATE OF TOUN COUNTY OF The foregoing Agreement was acknowledged and sworn before me this 20 202 1, by Patricia Pirkl Trust of Patricia Pirkl an Iowa Trust. [SEAL] Notary Public TIMOTHY S. GRADY Commission Number 139912 My Commission Expires July 3, 2022 Commission expires:

STATE OF TLLINOIS)	
STATE OF TLUMOIS) COUNTY OF Dulaye)	
The foregoing Agreement was acknowledged and sworm 2022, by Navid Boyce of Dutmy	SP2, LLC, a Delaware limited hability company.
[SEAL]	Nino Pokel
para a sala a sa	Notary Public Commission expires: 2 14 2022

My Commission Expires Feb 4, 2022

EXHIBIT A TO MEMORANDUM OF SOLAR EASEMENT AGREEMENT

LEGAL DESCRIPTION OF THE PROPERTY

A fifty (50) acre portion of the Southeast Quarter of Section 1, Township 77 North, Range 6, West of the 5th Principal Meridian, Johnson County, Iowa containing the following Parcel Numbers:


1801426001 1801451001

1801401003

1801476001

Center Mass Coordinates: 41.499538°,-91.485915°

DEPICTION OF THE PROPERTY

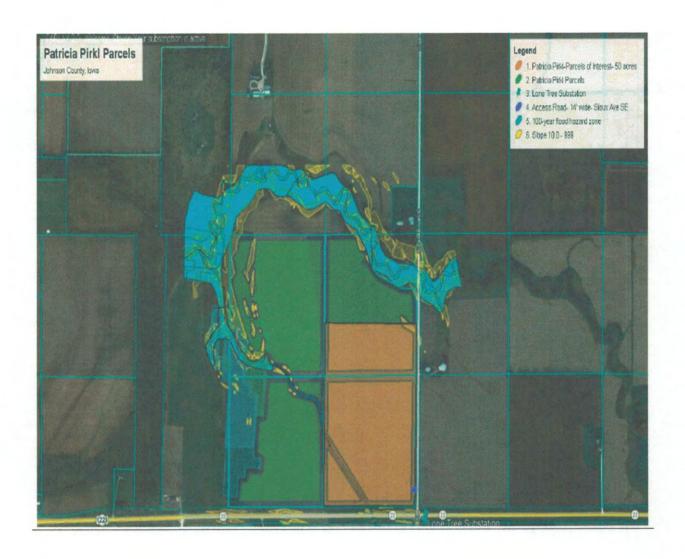

FIRST AMENDMENT TO SOLAR EASEMENT AGREEMENT

Lone Tree Solar

THIS FIRST AMENDMENT TO SOLAR EASEMENT AGREEMENT (this "Amendment") is made, dated and effective as of ______, 2023 (the "Effective Date"), by and between Patricia Pirkl Revocable Living Trust (together with its successors, assigns and heirs, comprising "Owner"), and Dutmy SP 2 LLC, a Delaware limited liability company (together with its transferees, successors and assigns, "Grantee"), and in connection herewith, Owner and Grantee agree, covenant and contract as set forth in this Amendment. Owner and Grantee are sometimes referred to in this Amendment as a "Party" or collectively as the "Parties".

RECITALS

WHI	EREAS, Owner and (Grantee ente	red into that cer	tain Solar	Easement.	Agreement da	ted January
3, 2022 (the	"Agreement") and	that certain	Memorandum	of Solar	Easement	Agreement of	f even date
recorded on	, 202	_ as Docum	ent Number_			in the offi	cial records
of Johnson C	ounty, Iowa (the "M	lemorandun	n"); and				

WHEREAS, the Parties wish to enter into this Amendment to modify various provisions in the Agreement on the terms and conditions set forth herein.

NOW, THEREFORE, for good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the Parties do hereby state, declare and establish as follows:

- 1. The Recitals are fully incorporated herein by this reference. Capitalized terms not otherwise defined herein shall have the meaning ascribed to them in the Agreement.
- 2. The term "Agreement" wherever used in the Agreement means the Agreement as modified by this Amendment.
- 3. Exhibit A to the Agreement is hereby deleted in its entirety and replaced with <u>Schedule A</u> attached hereto.
- 4. Owner shall execute in recordable form, and Grantee may then record, a memorandum of this Amendment substantially in the form of <u>Schedule B</u> attached hereto, incorporating only those non-substantive changes to the form as may be required by the applicable jurisdiction in which recording is sought and to reflect the terms of this Amendment.
- 5. Owner and Grantee have the authority to execute and deliver this Amendment. Except as modified by this Amendment, the Agreement remains in full force and effect. This Amendment may be executed and delivered in counterparts. As of the Effective Date, the Owner and Grantee acknowledge and agree that there are no breaches or defaults under the Agreement.

[Signatures on Following Page]

IN WITNESS WHEREOF, Owner and Grantee, acting through their duly authorized representatives, have executed this Amendment with the intent that it be effective as of the Effective Date, and certify that they have read, understand and agree to the terms and conditions of this Amendment.

OWNER:

Patricia Pirkl Revocable Living Trust

Name: Patricia Pirkl

Title: Trusee

GRANTEE:

Dutmy SP 2 LLC, a Delaware limited liability company

By: Mariano Brandi


Name: Mariano Brandi

Title: President

Schedule A Description of the Property

Johnson County Iowa parcel number 1801476001, comprising of Thirty-six point four(36.4) acres of the Southeast Quarter of the Southeast Quarter of Section 1, Township 77 North, Range 6, West of the 5th Principal Meridian, Johnson County, Iowa and parcel number 1801401003, comprising of thirteen point nine, nine (13.99) acres of the Northeast Quarter of the Southeast of the Southeast Quarter of Section 1, Township 77 North, Range 6, West of the 5th Principal Meridian, Johnson County, Iowa containing the following Parcel Numbers:

1801401003 1801476001

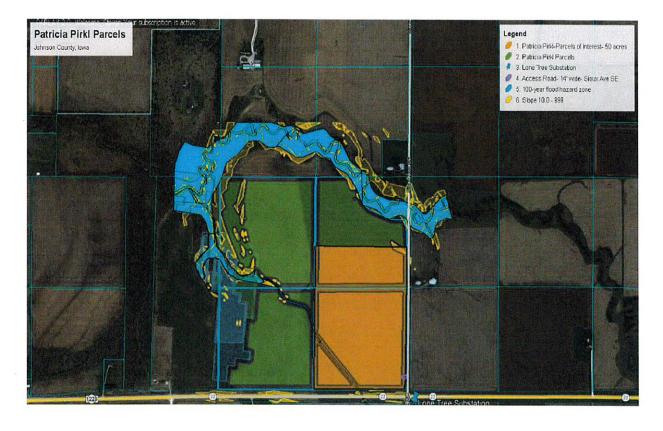

Schedule B Form of Recording Memorandum

[commences on following page]

Prepared by and after recording return to: Dutmy SP2 LLC c/o Danny Kach Litwin Kach LLP 200 N. LaSalle, Suite 1550 Chicago, IL 60601

THIS SPACE FOR RECORDERS USE ONLY

FIRST AMENDMENT TO MEMORANDUM OF SOLAR EASEMENT AGREEMENT

THIS FIRST AMENDMENT TO MEMORANDUM OF SOLAR EASEMENT AGREEMENT (this "First Amendment to Memorandum"), is made, dated and effective as of, 2023 (the "Effective Date"), between Patricia Pirkl Revocable Living Trust (together with its successors, assigns and heirs, "Owner"), whose address is 2718 340 th St., SW, Tiffin, IA 52340, and Dutmy SP2 LLC, a Delaware limited liability company (together with its transferees, successors and assigns, "Grantee"), whose address is Litwin Kach LLP, c/o Danny Kach, Litwin Kach LLP, 200 N. LaSalle, Suite 1550, Chicago, IL 60601, with regards to the following:
1. Owner and Grantee entered into that certain Solar Easement Agreement dated January 3, 2022 (as amended, the "Agreement") and that certain Memorandum of Solar Easement Agreement of even date recorded on, 202 as Document Number in the official records of Johnson County, Iowa (the "Memorandum"). Capitalized terms used and not defined herein have the meaning given the same in the Agreement.
2. Exhibit A to the Memorandum is hereby deleted in its entirety and replaced with <u>Schedule A</u> attached hereto.
3. Owner and Grantee have the authority to execute and deliver this First Amendment to Memorandum. Except as modified by this First Amendment to Memorandum, the Memorandum remains in full force and effect. This First Amendment to Memorandum may be executed and delivered in counterparts.

[signature page to follow]

IN WITNESS WHEREOF, the parties have executed this First Amendment to Memorandum as of the Effective Date first written above.

OWNER:	GRANTEE:
Patricia Pirkl Revocable Living Trust By: Patricia Pirkl Name: Patricia Pirkl Title: Trusee	Dutmy SP 2 LLC, a Delaware limited liability company By: Mariano Brandi Name: Mariano Brandi Title: President
STATE OF Towa) SS: COUNTY OF Johnson)	
The foregoing Agreement was acknowledged and swor by Patricia Pirkl, as Trustee of the Patricia Pirkl Revoc My commission expiration of the Patricia Pirkl Revoc My commission expiration funder 139912 My Commission Expires July 3, 2025	
STATE OF Texas) COUNTY OF Fort Bend)	
The foregoing Agreement was acknowledged and swor by <u>Mariano Brandi</u> of Dutmy SP 2 L	rn before me this 12th of May, 2023, LC, a Delaware limited liability company.
My commission expires: [SEAL] PAMELA M HO Notary ID #132- My Commission May 13, 20	Expires Notary Public

Disclosure - This notarial act was completed as an online notarization via two-way audio/video recording. Mariano Brandi provided a State of Texas DL as identification and was approved with multi-factor KBA authentication.

SCHEDULE A TO MEMORANDUM OF SOLAR EASEMENT AGREEMENT Description of the Property

A fifty (50) acre portion of the Southeast Quarter of the Southeast of the Southeast Quarter of Section 1, Township 77 North, Range 6, West of the 5th Principal Meridian, Johnson County, Iowa and the Northeast Quarter of the Southeast of the Southeast Quarter of Section 1, Township 77 North, Range 6, West of the 5th Principal Meridian, Johnson County, Iowa containing the following Parcel Numbers:

1801401003 1801476001



DUTMY SP 2 LLC

1209 Orange Street, Wilmington, New Castle, Delaware 19801
Document Number
5082304
(the "Limited Liability Company")

RESOLUTION OF LIMITED LIABILITY COMPANY

A Limited Liability Company organized on February 11th, 2021, under the Laws of the state of Delaware. The Undersigned, being the Manager of the Limited Liability Company, hereby orders and adopts the following corporate resolution as per the 26th day of November 2021.

WHEREAS:

- The Limited Liability Company wishes to name Mariano Brandi, an Argentinian citizen, bearer of passport number AAG773450 as the Manager of the company DUTMY SP 2 LLC, in accordance with 6 Del. Code §§17-201, Delaware Statutes.
- The Limited Liability Company wishes to replace its name from DUTMY SP 2 LLC to PCR Investments SP2 LLC, in accordance with 6 Del. Code §§17-202, Delaware Statutes.

RESOLVED:

- To adopt & register Mariano Brandi as the Manager of the Limited Liability Company, in accordance with 6
 Del. Code §§17-202, Delaware Statutes.
- To substitute the Limited Liability Company name from DUTMY SP 2 LLC to PCR Investments SP2 LLC, in accordance with 6 Del. Code §§17-202, Delaware Statutes.
- To update the records of the Limited Liability Company, in accordance with the governing laws of the State of Delaware to represent the forgoing.

IN WITNESS WHEREOF, the undersigned have executed this document for the purpose of putting the resolutions adopted hereby and the actions contained herein on record.

Thus effective, this 26th day of November 2021.

Name: Martín Federico Brandi Title: Manager of DUTMY SP 2 LLC

CONSERVATION EASEMENT AGREEMENT

RE-Renewable Energy Rezoning application PZC-23-28330 of PCR Investments SP2, LLC for property located at the intersection of Highway 22 and Sioux Ave SE in Johnson County, Iowa.

THIS AGREEMENT, made and entered into by PATRICIA A PIRKL REVOCABLE TRUST and PCR Investments SP2 LLC, (collectively referred to herein as the Applicant), which expression shall include their successors in interest and assigns, and Johnson County, Iowa (referred to herein as the County), which expression shall include its successors in interest and assigns.

WHEREAS, Applicant does hereby covenant with the County that it is lawfully seized and possessed of the real estate described below, and Applicant has good and lawful right to convey it, or any part thereof. The property is legally described as:

WETLAND/STREAM CORRIDOR EASEMENT DESCRIPTION

A 100 FOOT WIDE WETLAND/STREAM CORRIDOR, BEING A PART OF THE SOUTHEAST QUARTER OF THE SOUTHEAST QUARTER OF SECTION 1, TOWNSHIP 77 NORTH, RANGE 6 WEST OF THE 5TH P.M., JOHNSON COUNTY, IOWA, MORE PARTICULARLY DESCRIBED AS; COMMENCING AT THE SOUTHEAST CORNER OF THE SAID SOUTHEAST QUARTER; THENCE SOUTH 88°32'17" WEST, ALONG THE SOUTH LINE OF THE SAID SOUTHEAST QUARTER, 1329.68 FEET TO THE SOUTHWEST CORNER OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11" WEST, ALONG THE WEST LINE OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER, 115.85 FEET TO THE NORTH LINE OF IOWA HIGHWAY 22; THENCE N88°33'11"E, ALONG THE SAID NORTH LINE OF IOWA HIGHWAY 22. 534.91 FEET TO THE POINT OF BEGINNING FOR THE LAND HEREIN INTENDED TO BE DESCRIBED; THENCE NORTH 40°51'12" WEST, 359.28 FEET; THENCE NORTH 59°42'29" WEST, 107.23 FEET; THENCE NORTH 50°44'21" WEST, 269.12 FEET; THENCE NORTH 14°24'28" WEST, 17.31 FEET TO THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11"W, ALONG THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER, 341.98 FEET; THENCE SOUTH 24°34'03" EAST, 104.30 FEET; THENCE SOUTH 14°24'28" EAST, 213.94 FEET; THENCE SOUTH 50°44'21" EAST, 228.47 FEET; THENCE SOUTH 59°42'29" EAST, 115.99 FEET; THENCE SOUTH 40°51'12" EAST, 458.04 FEET TO THE SAID NORTH LINE OF IOWA HIGHWAY 22; THENCE SOUTH 88°33'11" WEST, ALONG THE SAID NORTH LINE OF IOWA HIGHWAY 22, 129.42 FEET TO THE POINT OF BEGINNING.

(herein referred to as the Project Site), which contains sensitive areas as defined by the Johnson County Unified Development Ordinance and identified in the Sensitive Areas Plan on file for this application; and

WHEREAS, pursuant to the Johnson County Unified Development Ordinance, Applicant shall obtain administrative approval of a Sensitive Areas Report and Sensitive Areas Plat Exhibit (together, "the Sensitive Areas Plan") that conforms to the standards of subchapter 8:3 prior to the Board approving a request to rezone property to RE-Renewable Energy; and

WHEREAS, the Zoning Administrator approved the Sensitive Areas Plan in conformance with subchapter 8:3 of the Johnson County Unified Development Ordinance, contemporaneous with rezoning of the Project Site; and

WHEREAS, in accordance with the Johnson County Sensitive Areas Ordinance, Applicant must establish a Conservation Easement over certain property within the subdivision to prevent the impact of development on the sensitive features.

IT IS HEREBY AGREED AS FOLLOWS:

For the sum of \$1.00 or other valuable consideration, the receipt of which is hereby acknowledged, Applicanthereby grants and conveys to County a conservation easement for the purpose of protecting certain environmentally sensitive areas, in accordance with the Johnson County Sensitive Areas Ordinance and the Sensitive Areas Plan, from being disturbed or constructed upon, over and across the areas designated as "Conservation Easement" as shown on the Sensitive Areas Plat Exhibit as shown on Exhibit A, (herein referred to as the "Easement Area") which is attached hereto and by this reference is made a part hereof.

- 1. <u>Grant of Easement and Rights of the County.</u> To accomplish the purposes of this easement, the following rights are granted and conveyed to the County, which shall include the right to enter upon and perform any work reasonably necessary to effectuate these rights:
 - (a) To preserve, protect, and maintain the Easement Area consistent with this Agreement.
 - (b) To enter upon the Easement Area at reasonable times in order to monitor compliance with the terms of this easement agreement.
 - (c) To prevent any activity on or use of the Easement Area that is inconsistent activity or use pursuant to this agreement.
- 2. <u>Permitted Uses of the Easement Areas.</u> Applicant reserves to itself, its representatives, heirs, successors, and assigns, all rights accruing from its ownership of the Easement Area, including the right to engage in or permit or invite others to engage in all uses of the Easement Area that are not expressly prohibited herein and that are not inconsistent with the purposes of this easement. Without limiting the generality of the foregoing or the restrictions in paragraph 3, the following activities and uses are allowed:
 - (a) Buffer-permitted uses, in accordance with section 8:3.5.B.5.a, within demarcated buffers as shown on the Sensitive Areas Plan.
 - (b) Removal of invasive trees and shrubs in accordance with best management practices for invasive species control
 - (c) Removal of fallen trees for firewood.
 - (d) Birdwatching and wildlife observation
 - (e) Occasional tent camping;
 - (f) Hiking, fishing, hunting, skiing and other recreational activities not involving the use of motorized or wheeled vehicles

In the event that Applicant desires to undertake activities not specifically permitted by the foregoing paragraph, and not specifically prohibited by the provisions of Paragraph 3 below, Applicant shall notify the County in writing not less than thirty (30) days prior to the date Applicant intends to undertake such activity. The notice shall describe the nature, scope, design, location, timetable, and any other material aspect of the proposed activity in sufficient detail to permit the County to make an informed judgment as to its consistency with the purposes of this easement.

- 3. <u>Prohibited Uses of the Property</u>. Any activity on or use of the Easement Area inconsistent with the purposes of this easement is prohibited. It shall be the responsibility of the Applicant to enforce this Paragraph 3. Without limiting the generality of the foregoing, the following activities and uses are expressly prohibited:
 - (a) Residential, commercial or industrial development;

- (b) Construction, erection, or placement of any building, shed, structure, or hard surface (including gravel) whether recreational, agricultural, residential, commercial, or industrial in nature;
- (c) Dumping of ashes, trash, rubbish, garbage, or any other materials;
- (d) Placing billboards, outdoor advertising structures, or advertisement of any kind on the Easement Area, excepting signs of a reasonable size intended for the protection of the Easement Area or the identification of a boundary of the Easement Area;
- (e) Any exploitation of mineral resources, by either subsurface or surface means;
- (f) Agricultural practices, including but not limited to, grazing, cultivating, tilling, plowing, or hay cutting;
- (g) Use of pesticides or herbicides, except for the eradication of species detrimental to the natural beauty and ecological integrity of the Easement Area as approved in advance by the County;
- (h) Removal of standing trees for any purposes other than for invasive species control and other restoration or maintenance activities that are in accordance with best management and preservation practices and which further the intent of this Conservation Easement;
- (i) Use of motorized vehicles of any type except as may be necessary or useful for maintenance of the Easement Area or removal of fallen and standing trees in accordance with paragraph 2.h and paragraph 4.c of this easement agreement, and will not result in significant damage to sensitive areas as determined by County;
- (j) Introduction of non-native plant species, except as may be necessary, with the prior approval of the County, for erosion control purposes;
- (k) Alteration of the topography or drainage systems, except with prior approval of the County. Alteration of the topography may be authorized for purposes including, but not limited to, erosion control, drainage tile repair, enhancement of wetland values, public safety considerations, or for purposes protective of the natural integrity of the property;
- (I) Removal of natural materials except as specifically permitted under Paragraph 2 hereof. Control of plant diseases is allowed including the removal of diseased plants with prior approval by the County. Any plant removal for disease control purposes shall be in accordance with good preservation practices and further the intent of this easement;
- (m) Any act that would disrupt identified wetlands or archeological sites.
- 4. While this easement and these restrictions shall run with the land and be effective for as long as the property remains zoned RE-Renewable Energy, the County and each owner of the Project Site are individually and severally granted rights, but not obligations, of enforcement of this agreement and restrictions. If the County determines that Applicant is in violation of the terms of this agreement, the County shall give Applicant written notice of the same. Applicant shall then cure said violation within whatever reasonable timeframe is dictated by the party giving notice, but shall undertake diligent corrective action within thirty (30) days of such notice.

In the event Applicant does not timely cure the violation, the County may but is not obligated to undertake any lawful means to ensure Applicant cures the violation, including bringing an action at law or in equity in a court of competent jurisdiction to enforce this agreement; to enjoin the violation ex parte as necessary, by temporary or permanent injunction; to recover any damages to which it may be entitled for violation of

these terms or injury to any conservation value protected hereby; and to require the restoration of the Easement Area to the condition that existed prior to any such injury or violation.

For any violation of the terms of this easement agreement that results in impact to a sensitive area, as defined by Chapter 8:3 of the Johnson County Unified Development Ordinance, corrective action must include a survey of the actual impact boundary and calculated impact area, and the owner of the subdivision shall demonstrate full compliance with Section 8:3.5.B.3 of the Johnson County Unified Development Ordinance.

- 5. This agreement shall not be construed as creating a right of access by the general public to any portion of the Easement Area, though the County shall at all times have the right to access the Easement Area for any purpose consistent with its responsibilities under this agreement.
- 6. This conservation easement shall remain in effect so long as the Project Site is zoned RE-Renewable Energy. This conservation easement cannot be terminated or amended without the prior written consent of Johnson County, Iowa.
- 7. The cost of maintaining the Easement Area and enforcing the terms of this Agreement shall be borne by the Applicant.
- 8. Nothing in this Agreement shall be construed to impose an obligation on the County to exercise any of its rights under this Agreement or perform any maintenance or monitoring of the Easement Area, which obligation shall remain on Applicant or its successors in interest.
- 9. The provisions hereof shall inure to the benefit of and bind the successors and assigns of the respective Parties hereto, and all covenants shall apply to and run with the land and with the title to the land.
- 10. This agreement shall be accompanied by the following attachments:

a. Exhibit A – Sensitive Areas Plat Exhibit

DATED as of this day of, 20	
OWNER: PATRICIA A PIRKL REVOCABLE TRUST	PROJECT DEVELOPER: PCR Investments SP2 LLC
By: [OWNER NAME]	By: [ENTITY/COMPANY REPRESENTATIVE TITLE]
JOHNSON COUNTY, IOWA:	ATTEST:

Chairperson, Board of Supervisors

Johnson County Auditor, or designee

STATE OF IOWA, COUNTY OF JOHNSON, ss:	
This instrument was signed and acknowledged befor	e me on this day of,
20, by	.
	Notary Public in and for the State of Iowa
	, , , , , , , , , , , , , , , , , , , ,
STATE OF	
COUNTY OF	. ss:
This instrument was signed and acknowledged befor	e me on this day of,
20, by	
	Notary Public in and for the State of:
STATE OF IOWA, COUNTY OF JOHNSON, ss:	
	20 hafan an tha a hafanah Mata Biblista
	20, before me, the undersigned, a Notary Public in
	, and
	, to me personally known, who, being by me duly sworn, Supervisors and the Auditor, or designee, respectively, of
	within and foregoing instrument; that the seal affixed
	t said instrument was signed and sealed on behalf of said
	that the said Chairperson and Johnson County Auditor, or
	on of said instrument to be the voluntary act and deed of
said County of Johnson, Iowa, by it and by them volu	
· · · · · · · · · · · · · · · · · · ·	•
	Notary Public in and for the State of Iowa

PART OF THE EL/2 OF THE SEL/4 OF

MEAR, IL 61364 HCRESHCRECORDE (DOM) 787-4448

BK: 67 PG: 91

Recorded: 10/18/2023 at 9:48:08.0 AM


County Recording Fee: \$7.00 Iowa E-Filing Fee: \$3.13 Combined Fee: \$10.13

Revenue Tax:

Kim Painter RECORDER Johnson County, Iowa

PLAT OF SURVEY

PART OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER OF SECTION 1, TOWNSHIP 77 NORTH, RANGE 6 WEST OF THE 5TH P.M., JOHNSON COUNTY, IOWA.

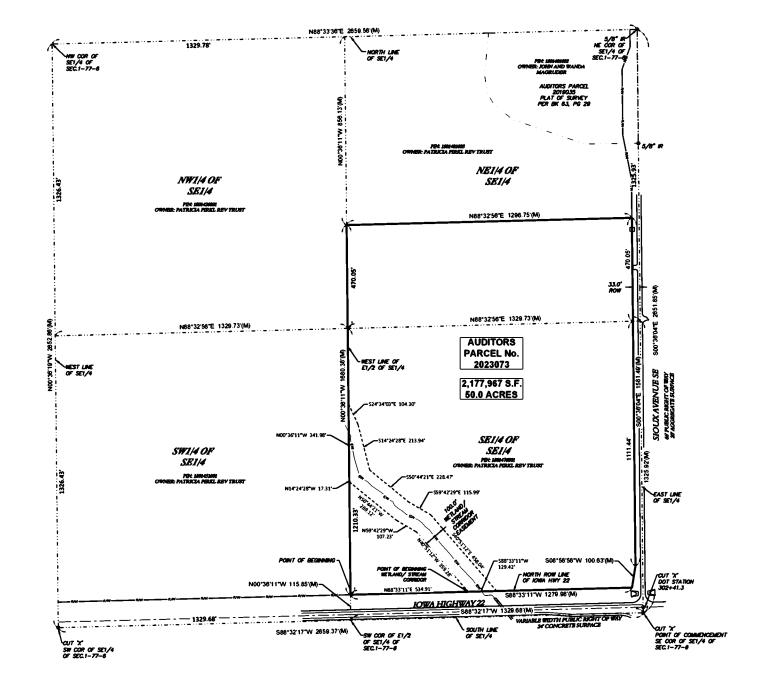



LEGAL DESCRIPTION

WETLAND/STREAM CORRIDOR EASEMENT DESCRIPTION

A 100 FOOT WIDE NETLAND/STREAM CORREIDOR BEING A PART OF THE SOUTHEAST QUARTER OF THE SOUTHEAST QUARTER OF SICTION 1, TOWNSHIP 77 NORTH, RAMGE 6 WEST OF THE STM PALL, JOHNSON COUNTY, 10M, MORE PARTICULARLY DESCRIBED AS, COMMENCINE, AT THE SOUTHEAST CONNECT OF THE SAID SOUTHEAST QUARTER TREASE SOUTHEAST SOUTHEAST SOUTHEAST CONTROL OF STREAST AND FEET TO THE MORTH LINE OF THE SAID BEAST ONE—HALF OF THE SOUTHEAST QUARTER, 119.50 FEET TO THE MORTH LINE OF THE SAID BEAST ONE—HALF OF THE SOUTHEAST QUARTER, 119.50 FEET TO THE DOINT OF BEGINNING FOR THE LAND HEREIN INTENDED TO BE DESCRIBED; THENCE MORTH 4075112" WEST, 309.25 FEET; THENCE MORTH 407512" WEST, 309.25 FEET; THENCE WORTH 407512" WEST, 309.25 FEET; THENCE WORTH 507520" WEST, 107.25 FEET; THENCE MORTH 407512" EAST, 309.25 FEET; THENCE SOUTH 407512" EAST, 309.26 FEET; THENCE SOUTH 407512" EAST, 309.37 FEET; THENCE SOUTH 407512" EAST, 309.37 FEET; THENCE SOUTH 407512" EAST, 309.37 FEET; THENCE SOUTH 407512" EAST, 409.04 FE


LEGEND

FLARED END SECTION

TELEPHONE PEDESTAL MEASURED & RECORD SOUARE FEET

BACK OF CURB

____ CONTOURS



SITE INFORMATION

8004 SIOUX AVENUE SE

LAND AREA 2,177,967 S.F. 50.0 ACRES

BASIS OF BEARINGS

THE SOUTH LINE OF THE SOUTHEAST QUARTER: ASSUMED BEARING S88'32'17"W PER STATE PLANE IOWA SOUTH

FLOOD INFORMATION

SURVEYOR CERTIFICATION



REVISIONS			CHK BY:	APV BY:
DATE	DESCRIPTION	120 10TH AVENUE EAST, SUITE 3 MILAN, IL 61284 (0) 309-787-9988	ВСН	DJK
		(F) 309-758-5540 (E) XCELONCELCONSULTANTSING.COM	XCEL JOB NUMBER: 224015 DRAWING NUMBER:	
		YCÉL		
		/ AYLL		
		Consultants	1 1 ()F 1

Lone Tree Solar

A. Adjacent houses within 500 feet:

Unoccupied farmhouse at 5946 Sioux Ave SE

Parcel ID: 1706326001

Landowner: Lloyd F. Burr Jr. Revocable Trust Address: 5408 540th St. SE, Lone Tree, IA 52755

B. Adjacent Landowners with 500 feet:

1. Landowner: Lloyd F. Burr Jr. Revocable Trust

Address: Lloyd F & Mary A Burr

5408 540th St. SE. Lone Tree IA 52755

Parcel IDs: 1706326001, 1706351001

2. Landowner: Judith A Shryack

Address: Judith Shryack

5408 19th Ave. Moline IL 61265

Parcel ID: 1707226003

3. Landowner: John Magruder

Address: John W & Wanda Magruder

5895 Sioux Ave. SE. Lone Tree, IA 52755

Parcel ID: 1801401002


4. Landowner: David J. Schott

Address: David J & Sherri L Schott

5505 Oakcrest Hill Rd. SE. Riverside, IA 52327

Parcel ID: 1812101002

C. Map on following page:

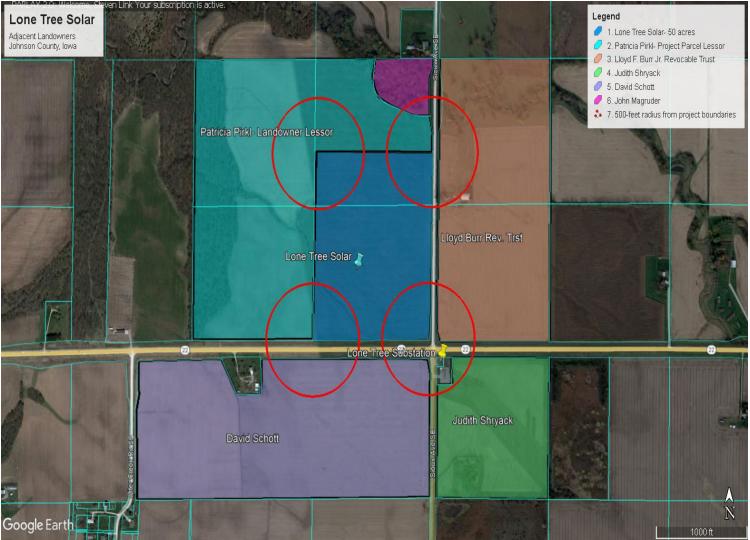

D.



Attachment D: Vegetation Management Plan



Vegetation Management Plan

Lone Tree Solar Project Lone Tree, Iowa Johnson County Stantec Project No: 193709077

July 25, 2023

Prepared for:

PCR Investments SP2 LLC 1334 Brittmoore Rd. Suite 1327 Houston, TX 77043

Prepared by:

Stantec Consulting Services Inc. 6605 West Steger Road Unit A Monee, IL 60449 Phone: (708) 534-3450 Fax: (708) 534-3480



TABLE OF CONTENTS

Executive Summary

1.0	PLAN	I GOALS	1					
2.0	PP∩	JECT OVERVIEW	4					
2. 0 2.1		CONDITIONS						
	2.1.1 2.1.2	TopographySoils	2					
	2.1.2	Shade						
	2.1.4	Current Vegetation						
3.0	SITE	PREPARATION						
3.1		PRE-CONSTRUCTION SOIL PREPARATION						
	3.1.1	Current Existing Vegetation / Site Preparation Considerations						
	3.1.2	Temporary Cover Crop Consideration	<u>-</u>					
	3.1.3	Soybean Fields	4					
	3.1.4	Small Grain Fields (Oats, Wheat, Cereal Rye)						
	3.1.5	Forage Crop Fields						
	3.1.6 3.1.7	Cornfields (Corn Silage and Grain Corn) Temporary Cover Crop Termination						
3.2		CONSTRUCTION SOIL PREPARATION						
	3.2.1	Soil Seedbed Preparation						
	3.2.1	Develop Contingencies for Erosion						
	3.2.3	Invasive and Weed Species Management						
	3.2.4	Cutting and Mowing	9					
	3.2.5	Herbicides	9					
4.0	VEGE	ETATION INSTALLATION	13					
4.1		DING PLAN						
	4.1.1	General Seed Mix Information	13					
4.2		DING PHASES						
	4.2.1	Pre-construction	1/					
	4.2.2	Construction through Post-construction						
	4.2.3	General Seed Installation (Seeding) Information						
4.3	TEMF	PORARY COVER CROPS	. 17					
4.4	PERM	PERMANENT SEED						
	4.4.1	Low Grow Native / Non-Native Seed Mix for PV Panel and Perimeter Areas (Table A.2)18					
	4.4.2	Pollinator Refuge Native Prairie Seed Mix – Select Perimeter Areas (Table A.3)	.18					
	4.4.3	Permanent Seed Installation	. 19					
5.0	MONI	MONITORING AND MAINTENANCE PLAN2						
5.1		TATION CUTTING						
	5.1.1	Mowing Frequency and Timing	21					
	5.1.1	Mowing Height	. 22					
5.2		BICIDE APPLICATIONS						
6.0	PREL	IMINARY SCHEDULE OF ACTIVITIES	.23					



i

E A CLUMANA DV		
7.0 SUMMARY	2	4

LIST OF TABLES

- Table 1. Soil Types within Project Area
- Table 2. Soil Preparation Procedures Based on Existing Vegetation and Project Construction Phase
- Table 3. Environmental Information for Proposed Herbicides
- Table 4. Permanent Seed Mix Comparison
- Table 5. Preliminary Schedule of Vegetation Management Activities

LIST OF FIGURES

Figure 1 – Lone Tree Solar Seeding Plan

LIST OF APPENDICES

Appendix A Seed Mix Tables

Appendix B Comparison of Seeding Methods



Executive Summary

PCR Investments SP2 LLC (PCR) is proposing to construct and operate the Lone Tree Solar Project (the "project") which is a 7.5-megawatt (MW) alternating current (AC) photovoltaic (PV) solar project in Lone Tree, Iowa in Johnson County. Proposed project developments, including ancillary facilities, will consist of solar panels and tracking systems, access roads, underground collector cables, inverters, and junction boxes. All equipment will be Tier 1 quality.

This Vegetation Management Plan (VMP) is intended for use alongside an Erosion Control Plan (ECP) and provides further guidance on site seeding preparation, custom site-specific seed mixes, seed installation, and vegetation management activities over the 30-year lifespan of the facility and will fully comply with the requirements set forth in section 8:1.23.BB.5 of the Johnson County Unified Development Ordinance (UDO). PCR will identify a qualified professional responsible to oversee selection and implementation of appropriate methods and recommendations per this plan and will coordinate with Johnson County on specifics of the plan once known.

Site preparation typically consists of soil amendments, such as discing to reduce soil compaction from solar construction activities and create a seedbed to facilitates robust germination of compatible vegetation. Management of noxious and invasive plant species, if any, and other weedy species may also be conducted to reduce competition and improve establishment of permanent seed mixes. Temporary seed mixes consist of annual grasses for soil erosion control during or immediately after construction. A permanent seed mix compatible with project vegetation objectives and suitable to local environmental conditions will be installed in the appropriate seeding windows available in coordination with the construction schedule and include low growing pollinator friendly (native and non-native grasses and grass-like plants and flowers) to be planted in the solar array areas and buffer.

Following permanent seeding, ongoing management of regulated noxious and invasive plant species, and other weedy species may be required for compliance with the Johnson County UDO and to maintain project compatibility. Vegetation management activities typically consist of cutting (mowing) and targeted herbicide applications over the 30-year window. The seed mixes are anticipated to be compatible with a minimum leading-edge height of 23.6 inches and shading from the panels. The custom designed seed mixes are also suitable for small ruminant grazing, (e.g., sheep), which is emerging as an alternative to mowing.



1.0 PLAN GOALS

Specific goals of this Plan include the following:

- Compatibility, adaptability and compliance with a SUDAS-compliant Project Erosion Control Plan (ECP) once written;
- Compliance with post-construction re-vegetation requirements per subchapter 8:1.23.BB.5 of the Johnson County UDO;
- Maintain soil health so that project lands may potentially be returned to productive agricultural land use after project decommissioning;
- Manage populations of existing noxious and invasive species within the project, as feasible;
- Develop and install permanent seed mixes that supports the following objectives:
 - Low growth, low maintenance, shade tolerant grasses for areas under panels and between panel rows.
 - Species adapted to site specific environmental parameters including soils, drainage, anticipated shade, and local climate,
 - Compatible with engineering objectives including height restrictions as well as capacity to form continuous, dense vegetation stands; and
 - Use of native species, including pollinator-friendly plantings.
- Prepare seed beds and employ seed installation methods suitable for temporary and permanent seed as required; and
- Establish and maintain vegetation for the project through the anticipated 30-year life span of the facility.



2.0 PROJECT OVERVIEW

PCR is proposing the Lone Tree Solar Site in Lone Tree, Iowa near the intersection of Highway 22 and Sioux Ave. The project is a 7.5-megawatt (MW) alternating current (AC) solar project that includes solar array blocks containing PV panels attached to a single-axis tracking system mounted to steel piles. The PV panels will track the sun during the day. Direct current (DC) electricity from the PV panels will be routed underground through collection wiring to inverters located throughout the PV array areas. The PV array area will be fenced and have gated access at the road entrances. Constructed access roads will be gravel and approximately 12 feet wide to 20 feet wide at the entrances). Construction is anticipated to start approximately 12 months after Johnson County permit approvals, and the duration of construction is estimated to be 8 months with an anticipated COD in Q2 2025.

The Solar Facility portion of the project area is approximately 50 acres. Areas that are disturbed for project purposes will be re-vegetated per the Erosion Control and Sediment Control Plan (ECSCP) and Stormwater Management Plan (SWP) that will be prepared prior to construction once the project design is finalized. This plan will supplement and does not replace the guidance provided in the ECP.

The minimum leading-edge height between the PV panels and the ground for this project is 23.6 inches. Post-to-post spacing between rows is approximately 21.5 feet. Final spacing within the arrays will be determined once equipment selection is finalized and the detailed engineering plan is complete. The installation of low-growing plant species and performance of vegetation management practices within the PV panel areas will be conducted to minimize vegetation touching and overshadowing PV panels.

2.1 SITE CONDITIONS

2.1.1 Topography

Project area topography consists of relatively level uplands that slope down towards natural drainage channels. Most of the project area consists of 0% to 6% slopes. project area slope precents are as follows:

- Project Area at 0% 6% slopes = 98%
- Project Area at 6% 12% slopes = 2%

2.1.2 Soils

Project area soils, based on United States Department of Agriculture-Natural Resource Conservation Service (USDA-NRCS) soil maps and interpretations, very deep, somewhat poorly drained soils formed in loess on uplands, fertile silt-loams conducive for vegetation establishment and cover and are mostly cultivated. Corn, soybeans, small grains, and meadow are the major crops, while some areas are used for pasture. Native vegetation was mixed prairie grass and hardwood trees. USDA-NRCS soil maps indicate 99% of project area soils consist of the soils identified in Table 1 below.



Table 1. Soil Types in Project Area

Map Unit Symbol	Map Unit Name	Hydric Rating	Hydric Category	Acres within Project Area	Percent of Project
291	Atterberry silt loam, 0 to 2 percent slopes	5	Predominantly Non-Hydric	11.78	23.56
175B	Dickinson fine sandy loam, 2 to 5 percent slopes	0	Non-Hydric	0.90	1.80
M162B	Downs silt loam, till plain, 2 to 5 percent slopes	0	Non-Hydric	4.14	8.25
M162C	Downs silt loam, till plain, 5 to 9 percent slopes	0	Non-Hydric	0.03	0.06
M162C2	Downs silt loam, till plain, 5 to 9 percent slopes, eroded	0	Non-Hydric	0.03	0.06
119	Muscatine silt loam, 0 to 2 percent slopes	5	Predominantly Non-Hydric	0.02	0.03
122	Sperry silt loam, depressional, 0 to 1 percent slopes	100	Hydric	18.65	37.22
121B	Tama silt loam, 2 to 5 percent slopes	0	Non-Hydric	7.98	15.92
160	Walford silt loam, 0 to 1 percent slopes	100	Hydric	6.47	12.90

The primary soil hydrology associated with the project area constrains vegetation selection to species suitable for wet to medium mesic soils. Seed mixes ratios between moist and dry species will shift towards the drier spectrum. However, soil compaction during solar construction decreases drainage efficiency while increasing water holding capacity that favors species adapted to higher moisture conditions.

Soil matrices composed of primarily loams and silt increases the risk for erosion. All soil work, including grading and tilling, requires immediate soil stabilization to minimize the potential for soil erosion. Soil stabilization includes planting temporary cover crop, planting cover crop and permanent seed mixes, or covering bare soils with straw mulch. Severe erosion will compromise project construction efficiency and long-term maintenance.

2.1.3 Shade

Project area solar intensities at ground layer are currently in full sun. Solar array construction will create shade under the PV solar panels while full sun conditions will continue in areas outside PV panels. Hence, following construction, solar intensities at the ground layer will range between full sun, to partial shade, to full shade.

2.1.4 Current Vegetation

Project area vegetation is currently comprised of agricultural crops which could include corn (Zea mays),



soybean (Glycine *max*), and alfalfa (*Medicago sativa*). Agricultural crop fields provide a good medium for planting solar project-compatible vegetation. However, agricultural crop field fertility has the potential to facilitate excessive weed growth. We have listed different preconstruction soil preparation strategies for each agricultural crop type in Section 3. Noxious weed management strategies and tactics are also described in Section 3.

3.0 SITE PREPARATION

3.1 PRE-CONSTRUCTION SOIL PREPARATION

3.1.1 Current Existing Vegetation / Site Preparation Considerations

All site preparation activities are contingent upon the construction schedule and construction start dates. Upon confirmation of the construction schedule, a memo outlining the selected products and methods for site preparation will be submitted to Johnson County for approval.

Existing field crops, including corn (*Zea mays*), soybean (*Glycine max*), and alfalfa (*Medicago sativa*), require different preconstruction treatments prior to solar construction and temporary cover crop installation. These recommendations are meant to increase overall project construction and vegetation management. Soybean fields, small-grain fields (e.g., oat, wheat, cereal rye), and forage crop fields (e.g., alfalfa and corn silage) provide low crop residue soil surfaces and non-compacted soils conducive to both vegetation and construction objectives. Cornfields, grown for grain, can create excessive crop residue and compacted soils that impede both vegetation establishment, management, and solar construction. For these reasons, we advise working with current land managers to help determine final crops planted before solar construction begins. Our advice for final crops prior to solar construction are, from best to worst, soybeans, small grains, forage crops (e.g., hay, alfalfa, or corn silage), and in the least desirable case, grain-corn.

3.1.2 Temporary Cover Crop Consideration

The following information provides guidance for installing preconstruction temporary cover crops into existing crop fields conditions. Temporary cover crop types, and associated planting schedules are found in Appendix A, Tables. It is recommended that temporary cover crops should be installed if soils are idled for periods greater than 14 days or overwintered prior to solar construction. Idled agricultural fields, for extended periods of time, can be severely impacted by erosion and noxious weeds. Both soil erosion and noxious weeds will hinder vegetation establishment, management, and solar construction. The greatest potential for severe erosion in occurs in late winter / early spring when surface soils thaw while subsoils remain frozen, and rain occurs. Under these conditions, gully formation on associated unprotected soils and slopes, is rapid. Seeding cover crops into idled agriculture fields will help prevent erosion, maintain soil nutrients, provide competition against noxious weeds, reduce soil compaction, and help increase solar construction efficiency.

Existing field crops, such as soybeans, small grains, forage crops and corn, require different site preparation treatments prior to temporary cover crop installation. Excessive field crop residue and associated soil compaction will hinder cover crop installation, and ongoing vegetation and construction activities. The following information provides guidance for final field crop preparation that provide good conditions for cover crop installation and future vegetation management and solar construction.

3.1.3 Soybean Fields

Soybean fields are harvested in late-September through early-October. Harvested soybean fields provide good conditions for seeding temporary cover crops, permanent seed, and ongoing solar construction.



Harvested soybean fields on sloping soils are susceptible to erosion that will impede ongoing vegetation management and solar construction. Therefore, it is not recommended soybean fields stand bare for long periods and should not go bare over winter. Harvested soybean fields, not scheduled for fall solar construction, should be stabilized seeded with temporary cover-crop before winter, preferably before mid-October.

Temporary cover crops, and when applicable permanent seed can be directly no-till drill seeded into soybean stubble. Temporary cover crop seed can also be broadcast seeded if followed by a packer (e.g., Brillion seeder, cultipacker or roller). Unharvested soybean fields should be mowed short or treated with an appropriate herbicide before seeding and solar construction.

3.1.4 Small Grain Fields (Oats, Wheat, Cereal Rye)

Small grains are harvested in mid-August. Harvested small grain crop fields can require surface residue reduction via straw baling to provide good conditions for seeding temporary cover crops, permanent seed, and ongoing solar construction activities. Without straw baling, excessive crop residue can impede seeding and solar construction. Small grain crop fields are more resilient to erosion and can stand bare for longer periods than soybean fields. However, small grain crop fields, not scheduled for fall solar construction, should be stabilized with temporary cover crops before winter, preferably before mid-October, to avoid severe spring erosion.

Following straw baling, temporary cover crops, and when applicable permanent seed can be directly notill drill seeded into small grain stubble. Temporary cover crop seed can also be broadcast seeded, but this seeding method requires a shallow discing prior to broadcast seeding and a packing procedure following broadcast seeding. Unharvested small grain fields should be mowed short or treated with an appropriate herbicide before seeding and solar construction. Small grains, treated with herbicide, require biomass reduction, such as mowing before additional vegetation management of solar construction continues.

3.1.5 Forage Crop Fields

Forage crop fields, such as alfalfa-hay, are harvested throughout the year. Forage crop fields require some additional site preparation to provide good conditions for seeding temporary cover crops, permanent seed, and ongoing solar construction. Final site preparation includes a harvest (i.e., haying) to remove excess residue and a herbicide treatment to suppress existing vegetation and potential weeds. Herbicide application should occur approximately 20-30 days following haying, to allow remaining vegetation time to recover and regreen. Vegetation should reach 3 inches to 5 inches in height before herbicide is applied. Forage crop fields, prior to herbicide treatment, are resistant to erosion. Following herbicide treatment, soil erosion resistance decays, and forage crop fields should be seeded within 30 days following herbicide treatment.

Following herbicide treatment, and based on herbicide manufacturer's recommendations, temporary cover crops, and when applicable permanent seed, can be directly no-till drill seeded into forage crop stubble. Temporary cover crop seed can also be broadcast seeded, but this seeding method requires a shallow discing prior to broadcast seeding and a packing procedure following broadcast seeding.

3.1.6 Cornfields (Corn Silage and Grain Corn)

Regionally, corn is grown for either silage or grain. Corn harvested for silage provides good conditions for seeding temporary cover crops, permanent seed, and ongoing solar construction. Temporary cover crops, and when applicable permanent seed can be directly no-till drill seeded into corn silage stubble. Temporary cover crop seed can also be broadcast seeded, but this seeding method requires a shallow discing prior to broadcast seeding and a packing procedure following broadcast seeding.



Corn grown for grain produces excessive crop residue and severe soil compaction that makes ongoing site preparation and solar construction difficult. Excessive crop residue in combination with soil compaction decreases both evaporation and drainage, and in wet periods, ponding, mud, and rutting conditions persist. These conditions exacerbate vegetation management and solar construction. Adequate seedbed preparation for grain corn fields begins with mowing corn stubble, baling and removing plant residue, and/or discing soils prior to seeding.

Grain corn is the last regional crop to be harvested, usually in November, and often too late for cover crop germination. To avoid muddy compacted soils during solar construction, we advise grain cornfields be mowed and baled in the fall immediately following harvest. Unless solar construction begins immediately following harvest, we advise cover crops to be installed before winter freezes soils. Winter cover crops will germinate in early spring. Cover crops will help mitigate drainage and compaction issues associated with grain cornfields, plus provide protection against erosion and nutrient sloughing. Cover crop installation requires corn stubble to be mowed, residue baled and removed, and soils lightly disced prior to seeding.

Harvested grain corn fields are resistant to erosion; however, severe soil compaction prohibits water infiltration and therefore exacerbates downslope erosion.

3.1.7 Temporary Cover Crop Termination

Temporary cover crops can produce excessive crop residue that impede ongoing vegetation management and solar construction. Therefore, temporary cover crop installation requires planning for terminating cover crops before they produce excessive residue or how to deal with the excessive residue once its produced. Cover crops planted with permanent seed are terminated with regular ongoing management mowing.

If necessary, Fall installed temporary cover crops, consisting of winter wheat (*Triticum aestivum*) and annual rye grass (*Lolium multiflorum*) (Table A.1-A), can be treated with glyphosate or mowed short in the mid-spring before ongoing solar construction and vegetation management procedures proceed. Chemical and mowing cover crop termination should occur when cover crop has achieved 6 inches in height but is less than 12 inches tall.

If necessary, Spring installed temporary cover crops, consisting of oats (*Avena sativa*) and annual rye grass (*Lolium multiflorum*) (Table A.1-C), can be treated with glyphosate, or mowed short in the early-summer before ongoing solar construction and vegetation management procedures proceed. Chemical and mowing cover crop termination should occur when cover crop has achieved 6 inches in height but is less than 12 inches tall.

An alternative to mowing or treating cover crops with glyphosate is haying. Haying has the advantage of leaving behind a clean soil surface that is highly desirable to ongoing solar construction and vegetation management. Haying also has the advantage of reducing excess soil nitrogen; therefore, reducing the potential for noxious weed recruitment. The haying procedure allows the temporary cover crop to reach the beginning stages of flowering (boot stage). The cover crop is cut green and harvested for silage or hay. Green cover crops provide local farmers a quality forage crop.

3.2 POST-CONSTRUCTION SOIL PREPARATION

If the project area is not seeded with a cover crop or the permanent seed mix prior to construction, then post-construction soil preparation will be required to develop a seedbed suitable for robust germination and compatible cover while providing a smooth surface for long-term vegetation management. Severe soil compaction caused by solar construction and tight spaces between panels makes post-construction seedbed preparation challenging. To minimize soil compaction, facility contractors will use areas proposed as access roads as much as possible for travel. Following construction activities and prior to the installation of regionally appropriate seed mixes, areas of heavy use such as the laydown yard may be



tilled or ripped to alleviate soil compaction and then disked to provide a uniform surface. A qualified vegetation management professional will be consulted for recommended techniques prior to seeding; the qualified professional, once chosen, will coordinate with Johnson County on specifics of the seeding plan (e.g., construction schedule, seeding windows, etc.) one known.

In areas where soil compaction is present, soil preparation will require a minimum of one deep tilling with an off-set disc, chisel plow or soil-ripper to fracture compacted soils. Following deep tillage, soils will require at least one pass with a drag harrow to create a smooth, firm, and friable seedbed that offers good germination and recruitment potentials. All seeded areas require a final packing to increase seed germination and reduce erosion potentials.

Table 2. Soil Preparation Procedures Based on Existing Vegetation and Project Construction Phase

Existing Conditions	Erosion Potential	Pre-seeding Preparation	Suitable for No-till Drill Seeding	Suitable for Broadcast seeding	Post-seeding Preparation Work
Harvested Soybean Field	High	None	Yes	Yes	Pack soils following seeding
Harvested Small Grain Field	Low	Reduce crop residue (e.g., bale straw) Shallow disc soils before broadcast seeding	Yes	Yes	Pack soils following seeding
Standing Forage Hay Field	Low	Final harvest to reduce biomass Herbicide treat forage Shallow disc soils before broadcast seeding	Yes	Yes	Pack soils following seeding
Harvested Corn Silage Field	Moderate	Shallow disc soils before broadcast seeding	Yes Disc soils prior to drilling seeding	Yes	Pack soils following seeding
Harvested Corn Grain Field	Moderate	Mow corn stubble. Bale corn residue Disc soils	No Disc soils prior to drilling seed	Yes	Pack soils following seeding
Post Solar Construction Bare Soils Within array field	High	Disc or chisel plow to reduce soil compaction (1-2 passes) Drag soils smooth firm Seed immediately	No Drill seeding not recommended in array field, inadequate seed coverage	Yes	Pack soils following seeding
Post Solar Construction Outside array field	Low	Disc or chisel plow to reduce soil compaction (1- 2 passes) Drag soils smooth firm Seed immediately	Yes	Yes Increase seeding rates by 20%	Pack soils following seeding
Post Construction Noxious	Moderate	Treat weeds with appropriate herbicide Disc or chisel plow to	No Drill seeding not recommended	Yes Follow herbicide label for	Pack soils following seeding



Existing Conditions	Erosion Potential	Pre-seeding Preparation	Suitable for No-till Drill Seeding	Suitable for Broadcast seeding	Post-seeding Preparation Work
Weeds Within array field		reduce soil compaction (1-2 passes) Drag soils smooth firm Seed immediately	in array field, inadequate seed coverage	seeding post herbicide treatment	
Post Construction Noxious Weeds Outside array field	Moderate	Treat weeds with appropriate herbicide Disc or chisel plow to reduce soil compaction (1-2 passes) Drag soils smooth firm Seed immediately	Yes Follow herbicide label for seeding post herbicide treatment	Yes Follow herbicide label for seeding post herbicide treatment	Pack soils following seeding

3.2.1 Soil Seedbed Preparation

A primary failure to establish compatible vegetation between and under PV panels is inadequate seedbed preparation. One reason is soil compaction that occurs during solar construction. Site preparation objectives seek to fracture compacted soils to a minimum of 2.5 inches. This requires a minimum of one pass with either a heavy duty off-set disk or chisel plow (aka soil ripper / subsoiler). Following discing or chisel plowing, soils should be drag-harrowed to create smooth, firm, and friable soils suitable for seeding. Soil harrowing requires a minimum of one pass. Soil fracturing and harrowing is not possible completely under PV panels; however, seed rates and species selection can be designed to mitigate the lack of seed bed preparation in these areas.

3.2.2 Develop Contingencies for Erosion

Excessive post-construction soil compaction coupled to extensive PV panel dripline, creates the potential for rill and gully erosion during the soil preparation and early seed establishment phases. For these reasons, contractors and subcontractors should have in place plans and resources to correct. This might include filling in washouts, reworking soils to prepare an adequate seed bed, and over seeding impacted areas.

3.2.3 Invasive and Weed Species Management

Despite the clean appearance of recently harvested agricultural fields, several noxious weeds, such as Canada thistle (*Cirsium arvense*) and giant ragweed (*Ambrosia trifida*) can persist and thrive in abandoned agriculture fields. When ceasing agricultural activities, noxious weeds are released and can quickly come to dominate large areas. These weeds can compromise project vegetation compatibility objectives and State and / or local Noxious weed laws. A list of noxious weeds in lowa can be found on the USDA website here: https://plantsorig.sc.egov.usda.gov/java/noxious?rptType=State&statefips=19

For this plan, invasive and weed species are defined under the following two categories:

- Compliance includes species covered under State of Iowa Noxious Weed Law: Chapter 317.
 These species will be referred to as 'noxious weeds.'
- Compatibility includes species that are not legally defined as noxious or 'invasive' but may
 interfere with the solar panels due to plant height, may interfere with ecological goals and the
 establishment of native species, or may pose vegetation management concerns. These species
 will be referred to as 'weeds.'



Invasive and weed species management will be conducted as needed to:

- Minimize the spread of noxious weeds from existing populations, if present,
- Prepare the seeding areas for permanent vegetation to reduce competition and improve establishment and success of the permanent seed mixes, and
- Reduce vegetation impacts to the PV panels and solar facility infrastructure. Flowering non-native species that are not considered noxious and do not have heights that interfere with the project operations and do not outcomptete the originally designated plantings will not be actively managed.

Noxious weed species management may consist of spot cutting, mowing, and herbicide treatments.

3.2.4 Cutting and Mowing

Vegetation cutting shall be appropriately timed to assist with control of invasive and weedy species (e.g., mow biennial species during flowering but prior to seed production) and to remove vegetation to assist with site seedbed preparation. Methods will be selected based on aerial extent of vegetation and site accessibility.

3.2.5 Herbicides

3.2.5.1 Purpose

Herbicide treatments are recommended for management of perennial noxious species, as mowing alone is not typically sufficient for adequate control. Ongoing management of invasive species may be required for compliance with existing invasive plant species regulations. Herbicides are also used to remove undesirable vegetation to prepare seeding areas for permanent seed installation. Insecticides, like neonicotinoids, are not necessary and will not be part of any vegetation management protocol in accordance with the Johnson County UDO (8:1.23.BB.5.c.i.).

3.2.5.2 Herbicide Types

There are three general types of herbicides that are applicable for use within the project: 1. Non-selective, 2. Broadleaf-selective, and 3. grass-selective.

Non-Selective Herbicides

Non-selective herbicides injure or kill all types of vegetation, including broadleaves, grasses, sedges, rushes, and woody plants. Glyphosate is commonly used to remove all vegetation to prepare areas for permanent seeding.

Broadleaf-Selective Herbicides

Broadleaf-selective herbicides are intended to injure or kill only broadleaf plants. There are many types of broadleaf herbicides. Two types commonly used in natural settings include 2,4-D and triclopyr. Both 2,4-D and triclopyr are used to remove broadleaf plants from grass-stands and turf lawns. Some broadleaf herbicides are highly selective, for example, the active ingredient clopyralid is very effective for controlling noxious Canada thistle (*Cirsium arvense*), giant ragweed (*Ambrosia trifida*) and weedy legumes (Fabaceae). These herbicides are all appropriate for controlling invasive broadleaf weeds within the PV panel arrays where only graminoid (grass and grass-like plants such as sedges and rushes) species will be installed. Extra caution should be taken to avoid injury to desirable graminoid species by waiting to apply herbicides after graminoid seedlings have matured for at least 90 days or have flowered at least once.



Grass-Selective Herbicides

Grass-selective herbicides are intended to injure or kill only grasses. The most common grass- selective herbicide is clethodim. It is used to selectively target undesirable grasses growing among desirable broadleaf plants. These herbicides may be appropriate for controlling certain invasive grasses in areas with pollinator-friendly vegetation.

3.2.5.3 Herbicide Application Methods and Timing

There are two primary methods to apply herbicides: low volume/spot applications and broadcast applications. Methods and timing should be based on a site-specific evaluation of target species, vegetation composition, and sensitivity of adjacent areas to herbicide applications.

Low Volume/Spot Applications

This method utilizes a hand-held sprayer mounted to small (3.5 to 25 gallon) tanks to selectively deliver herbicide to individual plants or small clumps of plants. Backpack sprayers are suitable for small areas while pistol sprayers mounted to an all-terrain vehicle or utility terrain vehicle (UTV) are suitable for larger areas or large clumps of vegetation. Wicks may also be used for ultra-low volume delivery of herbicide to undesirable plants growing in sensitive ecological areas. This method may be appropriate for managing discrete populations of weedy and invasive species before and during construction.

Broadcast Applications

This method utilizes a boom or boomless sprayer tanks mounted to a UTV or tractor to broadcast herbicide to large areas. This method is appropriate for large-scale site preparation to remove weedy and invasive vegetation from large areas using a non-selective herbicide.

3.2.5.4 Proposed Herbicides

The herbicides that may be used in the project are listed below in Table 1. These herbicides are frequently used in natural area settings to assist with management of species that would be expected to occur in the project area. These herbicides have a relatively short half-life and moderate to very unlikely potential to reach shallow groundwater.

Table 3. Environmental Information for Proposed Herbicides

					Environmen	tal Fate ^{1,2}	
Active Ingredient	Herbicide Type	Potential Uses	Rate (Ounces/ Acre)	Water Solubility		Sorption Coefficient KOC / FAO Mobility Classification	Groundwater Ubiquity Score (GUS) ⁴ / Potential to Reach Shallow Groundwater
Glyphosate	Non- selective systemic foliar	Non-selective treatment of grasses and broadleaf plants	64 - 96	Very soluble	3.6 days	33,025 in sandy soils / Hardly mobile	-0.29 in sandy soils / Very unlikely



				Environmental Fate ^{1,2}			
Active Ingredient	Herbicide Type	Potential Uses	Rate (Ounces/ Acre)	Water Solubility	Soil Half- life	Mineral Soil Sorption Coefficient KOC / FAO Mobility Classification 3	Groundwater Ubiquity Score (GUS) ⁴ / Potential to Reach Shallow Groundwater
2,4-D	Broadleaf systemic foliar	Selective treatment of weedy and invasive broadleaf plants	48 – 80	Moderately soluble	2.9 days	73 in sandy soils / Mobile	0.99 in sandy soils / Unlikely
Aminopyralid	Broadleaf selective foliar Species selective	Specific noxious and invasive weeds	5 - 9	Very soluble	81.5 days -	2.33 in	6.94 in
Clopyralid	Broadleaf selective foliar Species selective	Specific noxious and invasive weeds Asters and legumes	9 - 12	Very soluble	12.8 days	12.9 in sandy soils / Mobile ⁵	3.96 in silt loam / Likely ⁵
Clethodim	Grass- selective systemic foliar	Selective treatment of weedy and invasive grasses	12 - 16	Very soluble	3 days in unknown soil	137.5 in unknown soil / Moderately mobile	0.89 in unknown soil / Unlikely

¹ Information from Herbicide Properties Tool at the National Pesticide Information Center – Oregon State University. Accessed online on 10/28/2020 at http://npic.orst.edu/HPT/#.

3.2.5.5 Herbicide Adjuvants

Adjuvants are typically added to herbicide mixes to improve herbicide performance. Adjuvants typically used for natural areas management include hard water treatment additives, surfactants, and penetrants. Herbicide labels should be consulted for recommendations on the types of adjuvants to add to a mix. In general, aquatic-approved adjuvants should be used to minimize potential impacts on wildlife, including pollinators. Aquatic-approved adjuvants should always be used in and near areas of standing water.

3.2.5.6 Herbicide Standard Industry Practices

Herbicides are a valuable vegetation management tool when used according to manufacturer's instructions and following standard industry practices. The following practices are recommended when



² Reported for sandy soils unless otherwise stated in the Herbicide Properties Tool search results.

³ Based on FAO Mobility Classification in *Guidance for Reporting on the Environmental Fate and Transport of the Stressor Concern in Problem Formulations*. Accessed online on 10/28/2020 at https://www.epa.gov/pesticide-science-and-assessing-pesticide-risks/guidance-reporting-environmental-fate-and-transport#II C.

⁴ Potential to Reach Shallow Groundwater based on discussion in the Herbicide Properties Tool search results.

⁵ Appropriate for low volume foliar herbicide applications targeting individual plants or clumps of plants.

using herbicides to manage undesirable vegetation:

- 1. Vegetation managers should apply principles of integrated vegetation management. Herbicides will be used as one of several available 'tools in the toolbox' to manage vegetation and habitats in an ecologically sensitive manner, in addition to cutting, engineering controls, and cultural controls.
- 2. Herbicide labels and Safety Data Sheets should be read prior to mixing, loading, and application.
- The appropriate volume of herbicides and adjuvants necessary to complete a vegetation management task should be utilized. This includes targeted application techniques when practicable and use of properly calibrated equipment to minimize environmental effects.
- 4. The appropriate concentrations of herbicides and adjuvants as recommended by product labels are used to achieve intended outcomes. Applying herbicide lower than recommended rates might result in herbicide resistance. Applying herbicides above recommended rates may result in "top-killing" the plant before the herbicide translocations through the root system killing the entire plant instead of only the above ground structure.
- 5. Selective herbicides are used to limit effects on non-target plants.
- 6. Persistent noxious weeds typically require several treatments, such as a spring, fall, spring treatment regime.
- 7. Herbicide applications should be conducted during favorable weather conditions to maximize herbicide efficiency and minimize off-site drift and run-off. These weather conditions include:
 - a. Ambient air temperatures are below 78° degrees Fahrenheit (26° Celsius) and above 38° Fahrenheit (3° Celsius)
 - b. Average weather conditions have prevailed for a minimum of two weeks prior to herbicide application (e.g., avoid herbicide application during persistent heat, drought, freezing or wet conditions).
- 8. Herbicide should be applied to plants when plants are most physiologically prone to injury by active ingredients. Plants are most prone to herbicide injury when they are actively growing. Plant life cycles targetable for herbicide application include the flower bud-stage and the cool season photosynthesizing rosette stage. Plants that have senesced following flowering or are inactive due to high heat or drought should not be treated.

Additional practices may be developed, as needed, based on project area conditions.

3.2.5.7 Herbicide Permitting

Herbicide treatments shall be performed by individuals with a current Commercial Pesticide Applicator certification and license issued through Iowa Department of Agriculture & Land Stewardship, and in accordance with all applicable laws, regulations, and herbicide label instructions.



4.0 VEGETATION INSTALLATION

4.1 SEEDING PLAN

The proposed Lone Tree Seeding plan intends to establish the Low Grow Native/Non-Native PV Panel and Perimeter seed mix (Figure 1; Table A.2) throughout all areas currently not vegetated with perennial species within the footprint of the project facilities. The Low Grow Native/Non-Native PV Panel and Perimeter seed mix has been designed to accommodate a variety of site conditions and sun exposure including full sun and part shade conditions as shown in Table A.2. The Sensitive Areas Analysis conducted for the project identified one stream, an unnamed tributary to Otter Creek, and one Class 3 wetland within the project area. The Pollinator Refuge Prairie seed mix and/or the Pollinator Refuge Wetland seed mix (Figure 1; Table A.3 and A.4) will be used within areas currently not vegetated with perennial species within the stream corridor and Class 3 wetland buffers as well as the southwest corner of the project area encompassing the stream corridor and Class 3 wetland buffer as appropriate for site conditions. No ground disturbance, including tilling, will occur within the boundaries of the wetland or the stream (see Site Plan and ECP). The methods of establishment will be determined by the construction schedule, seeding windows and work plans. The methods described in the vegetation installation section cover the typical means and methods that may be employed to achieve the establishment goals.

Pollinator Refuge Prairie and Pollinator Refuge Wetland seed mixes (Appendix A, Tables A.3 and A.4) are also included if required due to site conditions, future considerations, or integrated vegetation management needs. Final installed mixes will be approved by the Zoning Administrator.

Section 4 provides information on custom seed mixes and planting methods. Seed mix information covers both temporary and permanent seed mixes. Planting methods includes final seedbed preparation, seeding methods (e.g., drilled and broadcast seeded) and post seeding procedures (e.g., packing) for temporary and permanent seed mixes. This information is designed to increase compatible vegetation establishment, long-term vegetation management objectives, and overall project construction efficiency. All site seeding activities maintain compliance with the ECP. Many variables contribute to seed installation timing and this plan covers procedures for a wide variety of scenarios. In areas where grading is required as part of the construction activities, establish and maintain a designated temporary seed mix until grading is complete to provide soil stabilization and compliance with ECP conditions. In areas where no grading is required as part of the construction activities, establish the designated perennial final seed mix to initiate long-term perennial vegetation during the soonest available optimal seeding window to increase the probability of successful vegetation establishment (see Section 4.2).

4.1.1 General Seed Mix Information

Knowledge of site environmental constraints coupled to project vegetation compatible goals allows us to design custom site-specific mixes for both temporary and permanent seed. These seed mixes are customized to meet the environmental constraints that develop following PV panel installation. Seed mixes consist of fast to establish, low-growing species that thrive in mesic and moist-mesic soil conditions under a variety of sunlight levels This multi-species seed mix and corresponding seeding rates allows robust coverage and rapid establishment for a variety of site-specific environmental parameters throughout the project area. Seed mixes included for Lone Tree Solar Project were developed by Chip DeAngelo, a Restoration Ecologist/Environmental Project Manager at Stantec. Chip earned a Bachelor of Arts in in Environmental Science at Calvin College in Grand Rapids Michigan and has 22 years of experience designing, planting, establishing, and maintaining native communities in the Midwest.

Seed mix specifications for temporary cover crops are found in Appendix A, Table A.1-A – Table A.1-D. Seed mix specifications for permanent vegetation is found in Appendix A, Table A.2 – A.4.



4.2 **SEEDING PHASES**

Seeding of the Project is anticipated to be completed in phases, as follows.

4.2.1 Pre-construction

The preference is to install and establish this seed mix prior to construction. The advantages of seeding prior to construction include:

- 100 percent coverage by seeding equipment for 100 percent vegetation coverage whereas seeding post-construction prohibits drill-seeding under panels leaving a significant portion of the site inadequately seeded;
- Significantly less time consuming, therefore less expensive;
- Eliminates the potential of damage to solar infrastructure by seeding equipment;
- Additional time for establishment of the root system which facilitates better drainage that lessens mud and rutting; and
- Established turf holds down dust that is hard on construction equipment.

Seeding prior to construction can facilitate more extensive vegetation cover, requires less technical operation of seeding equipment, is less expensive, minimizes damage to solar infrastructure, and improves construction conditions by making it less muddy and dusty.

There are three potential pre-construction seed installation windows, dependent on the status of the fields prior to construction:

- 1. If the project area is not cropped, then the preferred seeding window is early to mid-spring, mid-April through May to allow the seed mix to establish for a full growing season prior to start of construction.
- 2. If the project area is cropped, then seeding will occur in fall immediately following crop harvest and seedbed preparation. Soybean is recommended as the final crop to minimize seedbed preparation requirements and to allow for an early harvest to accommodate seed installation. If seeding is done immediately after crop harvest, depending on site and weather conditions, and seed installation timing, seed may germinate and grow prior to the first killing freeze, then overwinter.
- 3. If seed is not installed immediately after soybean harvest, then dormant seeding will be done. Seedbed preparation should occur when there is no snow cover and soils are not frozen. Seed should be installed after November 1 so it can overwinter and germinate in the spring. Dormant seeding rates should be increased by at least 20 percent.

A temporary cover crop should be installed with the permanent seed mix following Tables A.1-A – Table A.1-D (Appendix A) to provide cover and assist with grow-in of permanent seed, as follows:

 If permanent seed is installed during the spring, the cover crop should consist of oats, at the recommended rates provided in Table A.1-D Appendix A.



If permanent seed is installed during fall through winter, the cover crop should consist of winter
wheat and or annual ryegrass as described in Table A.1-B Appendix A. Dormant seeding rates
for the permanent seed should be increased by 20 percent.

The site should then be assessed in spring and any bare or thin spots remediated through additional seeding of the Low Grow Native / Non-Native Graminoid Seed Mix for PV Panel and Perimeter Area and a temporary cover crop as outlined in Appendix A, Tables A.1-A – Table A.1-D.

4.2.2 Construction through Post-construction

Construction activity (e.g., pile driving, access road construction, and routine traffic) in areas where the seed mix is established is expected to result in minor to moderate disturbance. Disturbed areas should be prepped and re-seeded using the Low Grow Native / Non-Native Graminoid Seed Mix for PV Panel and Perimeter Area and a temporary cover crop for compliance with the ECP. If repair seeding occurs in the spring through early summer, the cover crop should consist of oats. The cover crop should be installed at a lower rate when combined with permanent seed.

Temporary seeding may also be used to temporarily stabilize soils disturbed by Project construction prior to permanent seed installation. Species selection should be based on timing and seeding rates following Tables A.1-A – Table A.1-D (Appendix A). The cover crop should be installed at a higher rate when seeded alone.

For areas that are more impacted (e.g., routine traffic lanes, staging and laydown yards, etc.), soil compaction may limit vegetation establishment. If accessible, these areas should be deep tilled with an off-set disc, chisel plow or soil-ripper to fracture compacted soils. Following deep tillage, soils should be harrowed to create a smooth, firm, and friable seedbed, and then packed. Soil fracturing and harrowing is not possible in inaccessible areas (e.g., under PV panels). Seeding rates should be increased by at least 20% when re-seeding areas that are not fully prepped because they are inaccessible.

4.2.3 General Seed Installation (Seeding) Information

Seed installation for both preconstruction and post-construction project phases are described in this section. Preconstruction seeding primarily involves installation of temporary cover crops, and when appropriate, permanent seed mixes. Preconstruction seed installation methods are dependent upon preexisting conditions and timing. For example, some preexisting conditions, such as soybean fields, are suitable for direct no-till seeding. Other preexisting conditions, such as small grain crops (oats, wheat, rye, barley) corn silage, forage crops, and grain corn require additional site preparation prior to seeding. Site preparation for different preexisting conditions is detailed in Section 3 and summarized in Table 1.

There are two primary seed installation methods: drill seeding and broadcast seeding. Appendix C, Table 1.C provides a comparison summary of proposed seeding methods. Drill seeding requires less soil preparation and less seed. However, drill seeding is difficult in tight spaces and lacks the ability to spread seed under solar panels. Broadcast seeding requires greater soil preparation, increased seed amounts (e.g., >20%), and post-seeding packing to ensure adequate soil to seed contact and germination.

Differences between drill and broadcast seed installation dictates which method is preferable under preconstruction and post construction project phases. Drill seeding is the preferred method to install preconstruction temporary cover crops and, when applicable, permanent seed mixes, across the entire project area. Drill seeding is also the preferred method in larger post-construction areas (e.g., > 1 acre) outside the PV panel arrays, including designated perimeter, pollinator refuge, and buffer areas.

Broadcast seeding is the preferred method to install post-construction temporary and permanent seed mixes between PV panels. It is important to note, that while broadcast seeding covers more acres per



hour, it requires two additional procedures, including pre-seeding soil tilling and post seeding packing to ensure adequate germination and establishment.

Packing soils following broadcast seeding is required to achieve good soil to seed contact. Although drill seeders do not require soil packing post seed installation, drilled seed still benefits from packing. In all cases, packing soils following seeding ensures good soil to seed contact, smoother soil surfaces, and reduction in potential erosion.

4.2.3.1 Seed Depth

Seed depth is another important general consideration. A primarily failure in seed recruitment is planting too deep. This is especially true when soils are shallow disced prior to seeding. The key term in shallow discing is shallow. In the best-case scenario, all seed should be incorporated into the soils between 1/16th and 1/4 inches deep. Large seed, such as cover crop seed can be seeded deeper, up to ½ inch deep. The permanent seed mixes are dominated by small-seed species that should be seeded between 1/16th and 1/4 inches deep. Some permanent seed species are very small and perform best when left on the surface. We have included very small seed species that are shade tolerant for under PV panels where soil preparation is impossible. The best way to ensure seed is not installed too deep is to drag-harrow or pack soils following soil fracturing and before seeding. Drag harrowing or packing soils prior to seeding creates a firm friable seedbed that prevents seed from being planted too deep.

4.2.3.2 Mulching

Mulch may need to be applied following permanent seeding to assist with seed germination in accordance with SUDAS design specifications as also reflected in the ECP. Local sources of clean, seed-free hay of straw mulch are acceptable. Certified weed-free hay or straw is preferred. Hydromulch is a suitable substitute for hay or straw mulch. Hydromulching has the potential to incorporate seed with the mulch; therefore, seed and mulch are applied in the same procedure. Hydromulching is expensive, but sometimes necessary for seeding and stabilizing soils in areas difficult to establish with traditional seeding tactics. This often includes slopes around storm water run-off ponds and other areas prone to extensive washing following rainstorms. Mulching and other forms of erosion control should be done following the ECP, including provisions for materials, anchoring, and product selection.

A two-step process is recommended for hydroseeding native seed:

- 1. Broadcast seed at the recommended rate (increase seeding rate by 20% for broadcast seeding), then
- 2. Apply hydromulch material following manufacturer instructions.

4.2.3.3 Fertilizer

We recommend no fertilizer be applied to soils before, during or following seeding of both temporary cover crops and permanent seed mixes. Soils in the project area have been cropped with nitrogen fixing legumes, including soybeans and alfalfa, and augmented with nitrogen fertilizer for corn. Therefore, project soils provide adequate fertility to establish robust project compatible vegetation.

For sites developed on infertile soils, or on highly disturbed soils, the addition of legumes in cover crops can enhance fertility for permanent seed mixes. As such, legumes included in cover crops are not necessary for this project. Also, non-native legumes, including white clover (*Trifolium repens*) and red clover (*Trifolium pratense*) are included in the permanent seed mixes and native legumes are included in the permanent Pollinator Refuge seed mixes.

4.2.3.4 Seed Mix Vendors

Seed should be purchased from vendors that supply quality local sourced seed, or at a minimum, seed



that has proven successful in local environmental parameters. All seed, including temporary cover crop and permanent seed mixes, require seed tags that indicate seed weight, pure live seed, region of origin, and noxious weed content. Native seed should indicate seed source tags that indicate genetic origin not greater than 250 miles from the project site. Stantec maintains an in-house native seed nursery capable of providing seed for this project. Prices available on request.

4.3 TEMPORARY COVER CROPS

Temporary seeding of cover crops is employed to stabilize soils following removal from agriculture production and soils disturbed by project construction that are not ready for permanent seed and will be idled for extended periods, over winter, or as otherwise specified in the ECP.

Temporary cover crops are replaced by permanent vegetation prior to or following installation of PV panels. Temporary cover crop seeding rates (e.g., seeds per square foot) are higher when permanent seed is not installed to provide adequate vegetative cover and protection from soil erosion. Cover crop seed mixes are designed to meet two primary objectives:

- 1. Compliance with the ECP and
- 2. Stabilization of soils to assist with establishment of permanent vegetation.

Cover crops are composed of annual grasses that establish quickly, provide erosion control, establish residue for later permanent seedings, build soil organic matter, maintain soil nutrients, reduce soil compaction, and assist with weed suppression. Three annual grasses – winter wheat (*Triticum aestivum*), seed oats (*Avena sativa*), and annual rye grass (*Lolium multiflorum*) are utilized, depending on installation timing. Each of these species is listed on the lowa Construction Site Erosion Control Manual – Chapter 2. Vegetation and Soil Stabilization Control Measures and each species has a relatively wide tolerance of soil conditions.

Specific species and installation rates are selected based on installation timing, mechanism (drilled versus broadcast seeded), and whether cover crops are installed with or without permanent seed. Cover crop mixes, rates, and timings are provided in Tables A.1-A through A.1-D (Appendix A).

4.3.1.1 Solar Production Area

The solar production area is comprised of areas under and between the PV panel arrays. Temporary seeding in this area is completed in phases, starting concurrently with site preparation, and as follows:

- Phase 1 Fall (late-September to mid-November).: Temporary cover crop seeding occurs following final crop harvest. The temporary fall cover crop seed mix (Table A.1-A) is installed to establish vegetation cover that will overwinter and provide residue for additional temporary seeding in the 2025 growing season. Installation by drilling into exposed soils is the preferred method for seed establishment, but broadcast seeding is also acceptable method; however, broadcast seeding will increase the amount of seed needed by 20% and broadcasted seed needs to be incorporated into the soils via either a shallow drag-harrow or cultipacker.
- Phase 2 Spring (mid-April-June). The temporary cover crop seeding occurs in early spring to early summer. Cover crops for this time period are listed in (Table A.1-C).
- Phase 3 Spring-fall (mid-April-September). Aforementioned cover crop seed mixes (Tables A.1-A and A.1-C) will be installed, as needed, to revegetate areas disturbed by construction activities.

4.4 PERMANENT SEED

One permanent seed mix is proposed for the PV panel and perimeter Area as follows:



• Low Grow Native / Non-Native Seed Mix for PV Panel and Perimeter Areas (Table A.2)

A general description of this seed mix is described in greater detail below. Recommended species and rates for this mix are listed in Appendix A, Table A.2. Final seed mix design will occur when tentative seeding dates are known, and actual species composition and rates will be based on supply and cost just prior to seeding.

Pollinator Refuge Prairie and Pollinator Refuge Wetland seed mixes (Tables A.3 and A.4) are proposed within the stream corridor and Class 3 wetland buffer area and included for future seed mix development if required due to site conditions, future considerations, or integrated vegetation management needs. Final installed mixes will be approved by the Zoning Administrator. Installation and maintenance for this mix is comparable to that of the Low Grow Native/Non-Native Seed mix.

4.4.1 Low Grow Native / Non-Native Seed Mix for PV Panel and Perimeter Areas (Table A.2)

This seed mix is intended to provide a cost-effective permanent low maintenance, low stature, ECP compliant, project compatible vegetation over a variety of environmental conditions throughout the project area. This mix blends both native and non-native graminoids with a mix of native forbs that bloom across a wide range of seasons and common low growing clovers. Non-native cool-season grass species in this mix, such as bluegrass (*Poa* spp.), bent grass, (*Agrostis* spp.), and fescue grass (*Festuca* spp.) act as surrogates for historic native cool season species, and are intended to provide competition against cool-season invasive and weedy species. Together, the proposed species ensemble is adapted to compacted soils, moist soils, well drained soils, wet and drought conditions, sun and shade, cool and warm seasons, and cold and hot weather. Once established, this mix will provide multiple ecosystem services. Immediate ecological benefits include reductions in soil erosion, run off, nutrient sloughing, and soil compaction. Long term benefits include increase in soil health, nutrient regulation, water infiltration, water purification, biodiversity, pollinator habitat, and wildlife habitat including nesting habitat for grassland birds. None of the species are considered invasive or noxious under State of Iowa Noxious Weeds law (Chapter 317).

4.4.2 Pollinator Refuge Native Prairie Seed Mix – Select Perimeter Areas (Table A.3)

This mix contains native grasses, sedges, rushes, and wildflowers. The mix is intended to promote a diversity of wildflowers, with flowering occurring over each of the three blooming periods (spring, summer, and fall), along with native grasses and sedges that provide benefits to pollinators and other wildlife. The seed mix is intended to be cost-effective, provide short to medium stature native plant cover and diversity, and improve long-term soil health. None of the species are considered invasive or noxious under State of lowa Noxious Weed Law: Chapter 317.

The Pollinator Refuge Native Prairie Mix and Pollinator Refuge Native Wetland Mix is designed to be installed in select portions of perimeter areas (Figure 1). Areas intended for pollinator refuge mixes should be at least 0.5 acres in size and not to exceed 3:1 ratio between length and width to reduce surface area. Pollinator refuge areas also require occasional mowing and other management services, so these areas should be accessible by small tractors and skid-steers. More precise pollinator areas will be defined after the final site design is complete.

The proposed custom permanent seed mixes are compared in Table 4 below.



Table 4. Permanent Seed Mix Comparison

Attributes	Low Grow Native / Non-Native Graminoid Mix (Table A.2)	Pollinator Refuge Native Prairie and Wetland Mix (Table A.3 and A.4)
Dominated by non-native species	No	No
Dominated by native species	Yes	Yes
Growth height below 30 inches	Yes	Yes
Wildflowers / multi-season blooms	Yes	Yes
Pollinator habitat	Yes	Yes
Wildlife habitat	Yes	Yes
For moderately to poorly drained soils	Yes	Yes
For well drained soils	Yes	Yes
Shade tolerant	Yes	No
Sun tolerant	Yes	Yes
ECSWMP Compliant	Yes	Yes
Project Compatible	Yes	Yes
Contributes to Soil Health	Yes	Yes

4.4.3 Permanent Seed Installation

Permanent seed will be installed either preconstruction or following construction and seedbed preparation. During solar construction, soils are frequently compacted, rutted, and soil erosion can occur. Therefore, prior to permanent seed installation, soils typically require additional soil preparation procedures as described in Section 3. Permanent seed installation should occur immediately following final soil preparation.

Seeding can be accomplished by either a drill seeder, broadcast seeder, or packer seeder (e.g., Brillion seeder). There are positives and negatives associated with each seeding method, as described earlier in Section 4, and summarized in Appendix C, Table 1.

Ultimately, based on the ability to install seed under PV panels and seed in tight spaces, all permanent seeding between PV panels will occur via broadcast seeding. All broadcast seeding should be followed by packing or at minimum a shallow drag-harrowing, to help increase germination rates, decrease soil erosion potentials, and provide a smooth level soil surface conducive to long term management.

Native plantings, such as Pollinator Refuge seed mixes, can be either drill-seeded or broadcast seeded. Drill seeding native mixes requires a specialized drill designed to plant native seed (e.g., Truax Drill). Native seed can also be seeded via broadcast seeding, but this method requires soils be shallow disced, followed by firming with a drag harrow or packer, and then seeded, and then finished by an additional packing or light drag-harrowing.



The most efficient method for seeding larger areas (> 1 acre) outside the solar array areas is by drill seeding. These areas might include buffer and perimeter areas and Pollinator Refuge areas.

Post-seeding packing by a cultipacker or roller benefits both drill and broadcast seeding. These benefits include: 1. Increase soil to seed contact, 2. Increase germination rates, 3. Decreases erosion potential, 4. Provides a finished soil surface conducive to on-going vegetation maintenance and management.

4.4.3.1 Timing

Permanent Low Grow Native / Non-Native Seed Mixes for PV Panel and Perimeter Areas (Table A.2) can be seeded anytime between April 10th and September 30. There are preferred seeding dates within this contextual period, based on historic precipitation/evaporation ratios. The preferred dates for seeding permanent seed mixes are during the spring, between April 1 – June 15, and again in late summer between September 15 – October 15. Dormant season seeding in late fall through winter is not recommended for Permanent Low Grow Native / Non-Native PV Panel seed mixes. Associated compacted soils can encounter severe rill erosion during winter rains or rapid snow melt that can wash seed away. These areas can be difficult and expensive to re-seed and repair especially in between PV panels. For best results, seed should be planted during times that facilitates seed germination. The sooner the seed germinates, the less washing occurs, the more successful results. If dormant season seeding is the only option, permanent seed rates should be increased by 20%, a dormant season cover crop should be installed (Table A.1-B), and a contingency for over-seeding bare areas should be agreed upon between the contractor and service provider. If dormant seeding is selected as the seeding method, Johnson County will be consulted on plans to ensure successful establishment.

The Pollinator Refuge Seed Mixes (Table A.3 and A.4) are best installed in spring through early summer approximately between March 15 – June 15, and again in late summer between September 15 – October 15. Pollinator Refuge seed mixes can also be installed during the dormant season via frost seeding between November 30 to snow cover or during a period of light snow cover in the winter. Dormant season seeding seed rates should be increased by 20%. Areas with highly compacted soils should not be dormant season seeded to avoid washing.

Cover crop seed mixes should be installed with the permanent seed. If permanent seed is installed during fall through winter, the cover crop should consist of winter wheat and annual ryegrass (Table A.1-B). If permanent seeding occurs in the spring through early summer, the cover crop should consist of oats and annual ryegrass (Table A.1-D). Cover crop is installed at a lower rate when combined with permanent seed.



5.0 MONITORING AND MAINTENANCE PLAN

Section 5 provides information on post seed installation monitoring and maintenance that promotes the establishment of a desirable vegetation compatible with project objectives. Monitoring and maintenance activities seek to establish and maintain compliance with the ECP, and the Johnson County UDO.

Per Johnson County Code of Ordinances all required vegetative cover will be monitored on an annual basis. Reporting will be conducted on an annual basis for at least five years after which a request for reduced frequency of reporting may be submitted to the Zoning administrator for approval. Any vegetative cover that fails to establish or dies during the life of the project will be replaced.

All areas will require ongoing maintenance to establish and maintain desirable vegetation that is compatible with PV panels, project objectives, and in compliance with noxious weed laws. Maintenance is expected to be most intensive in the establishment phase, or approximately the first two growing seasons following seeding as desirable species germinate, grow, and mature. In general, native species take longer to mature than non-native species. Vegetation cutting and herbicide applications are typical management activities as discussed below. Monitoring will occur to confirm compatibility of vegetation with project goals concurrently with routine vegetation maintenance activities.

5.1 VEGETATION CUTTING

Cutting, by mowing or hand-trimming, is the primary management tool used to aid in the establishment of desirable vegetation. Cutting is employed to reduce height, reduce flowering of undesirable vegetation, and maintain sunlight at the ground surface to encourage germination and growth of desirable species. Mowing using a deck mower is applicable in areas that are accessible with a small tractor and mower. Flail mowers are preferred but rotary mowers are acceptable if significant clumping of grass clippings is minimized. A 3-point side-mounted trimmer mower attached to a small tractor may also be used to cut vegetation around steel piles and under panels if areas are accessible with equipment.

5.1.1 Mowing Frequency and Timing

Establishment Phase

Frequent cutting is required in all seeding areas during the establishment phase (post-seeding years 1 and 2) to reduce fast-growing (annual and biennial) weeds, minimize vegetation height under the PV panels, and assist growth of desirable species. Following permanent seeding, anticipate establishment mowing to occur 4 weeks following seeding and about every 4-6 weeks thereafter from mid-spring to midfall. A minimum of three mowings should occur during the first establishment year and a minimum of 2 mowings should occur during the second establishment year.

Transition Phase

By the third growing season, desirable vegetation should be established. Years 3-5 represent a transition phase where desirable vegetation becomes increasingly established but remains susceptible to weed invasion. The frequency of cutting is reduced, and in the best-case scenario, mowing targets only specific areas of weed growth and to minimize vegetation height under the PV panels.

Long-Term Maintenance

Over the long-term (years 6-30), mowing should occur on an annual or biennial basis. Annual or biennial mows should occur during the dormant season late fall or early spring, or in mid-summer. The goal of annual / biennial mows is to reduce thatch, encourage lateral growth, encourage root development, and minimize the establishment of woody vegetation. Actual mowing frequency is dependent upon soil moisture; wet areas and wet weather requires more frequent mowing while dry areas and dry weather reduces mowing frequency.



5.1.2 Mowing Height

Specific recommendations for mowing height vary by seed mix.

Low Grow Native / Non-Native Graminoid Seed Mix for PV Panel and Perimeter Areas (Table A.2) During the establishment phase (post-seeding years 1 and 2), areas seeded with this mix should be mowed when vegetation reaches a height of 8-12 inches and be cut back to a height of 4-6 inches. Expect to mow the vegetation three to four times during the first growing season, two times during the second growing season and once or twice per year thereafter. Installed species within this mix will likely stay below 18 inches in height (typically 8-12 inches) at maturity. Mowing this mix to the height of 4-6 inches will help invigorate the grasses and clover while discouraging weeds and trees.

Pollinator Refuge Native Prairie Seed Mix - Select Perimeter Areas (Table A.3)

In general, areas planted with the Pollinator Refuge Mix should be mowed when vegetation reaches a height of 8-12 inches, starting within 4-6 weeks post seeding and continuing at a 4–6-week interval throughout the first growing season, or whenever the vegetation reaches 8-12 inches in height. Taller vegetation will compete for sunlight and water and suppress desirable vegetation. Likewise, mowing taller vegetation creates excessive clumping that smothers desirable plants. Vegetation in Pollinator Refuge Mix plantings should be cut to a height of 6-8 inches during the first growing season.

During the second growing season, Pollinator Refuge plantings should be mowed two times, once in June and once in September–November. Mowing height should be 6-8 inches.

During the third growing season (Transition Phase), as native plants mature, mowing height should be raised to 10-12 inches and done selectively in June-July, to target tall and/or invasive and weedy species. A dormant season mowing at the end of the third growing season (October–November) offers spring emerging native species abundant sun to rapidly control state dynamics.

Long-term maintenance mowing should be conducted on an annual or biennial basis, during the dormant season, March-April, and September–November, and vegetation should be cut back to 6-8 inches. Summer mowing can be conducted to maintain project vegetation compatibility. Summer mowing should maintain 6–8-inch mower height, and not exceed one mowing per-growing season.

5.2 HERBICIDE APPLICATIONS

Herbicides may be used for long-term maintenance of areas planted with each seed mix. Herbicide type and method of application are highly dependent on target species and vegetation maintenance goals. Low volume / spot applications are appropriate for use in all areas during the establishment period (years 1 and 2) to spot treat invasive and incompatible species. Beyond the establishment period, this method is also appropriate for use in areas planted in pollinator-friendly seed mixes to minimize impacts on desirable vegetation and wildlife. Broadcast applications are generally not appropriate in areas planted with the native species and near PV panels. A combination of herbicides and application techniques is typically required to manage large areas. Herbicide use will be minimized to the extent practicable and will be conducted by trained and licensed personnel in accordance with label directions and standard industry practices.



6.0 PRELIMINARY SCHEDULE OF ACTIVITIES

The table below provides a preliminary schedule of activities that will occur up to permanent seed installation, however, the schedule is dependent upon Johnson County permit approval. Construction is anticipated to start approximately 12 months after Johnson County permit approval, and the duration of construction is estimated to be 8 months with an anticipated COD in Q2 2025.

Table 5. Preliminary Schedule of Vegetation Management Activities

Activity	Timeframe ¹
Start of construction	Q3-Q4 2024
Initial permanent or temporary cover-crop seed installation following vegetation removal, grading, and as-needed seed bed preparation (Table A. 1-C)	Q3 - Q4 2024
Initial permanent or temporary cover-crop seed installation following vegetation removal, grading, and as-needed seed bed preparation (Table A. 1-A)	Q3 - Q4 2024
As needed, install secondary temporary cover-crop seed for construction areas.	Q2 2025
Install permanent native seed mixes (Mixed Native & Non- Native Graminoid Seed Mix, and Upland Pollinator-friendly Seed Mix). Dormant season seeding rates should be increased by 20%. Dormant season cover crops are installed with permanent seed (Table A.1-B)	Q3-Q4 2024-Q1 2025
Install permanent native seed mixes (Mixed Native & Non- Native Graminoid Seed Mix, and Upland Pollinator-friendly Seed Mix). Cover crop for permanent seed and seeding during the growing season is found in (Table 1 A. 1-C).	Q3-Q4 2024 – Q2 2025
Project COD, start of 30-year facility life period	Q2 2025
Maintain permanent vegetation	Q2 2025 – Q3 2055

¹ Timing for vegetation management activities may be based on construction sequencing. Actual schedules for temporary seed installation, seed bed preparation, and permanent seeding may be based on construction timing within each array area.



7.0 SUMMARY

This plan was prepared to outline vegetation removal at the start of construction and revegetation tasks after construction of the project area. This plan also provides guidance to PCR on 30 years of maintenance following the installation of permanent vegetation at the Lone Tree Solar Project. The plan includes the installation of one permanent seed mix:

Low Grow Native / Non-Native Graminoid Seed Mix for installation under and between the PV
panels. This mix is anticipated to be compatible with minimum leading-edge height of 23.6 inches
and shading from the panels, as well as provide low maintenance and hardy vegetative cover.
This mix will also be planted in the bulk of the perimeter areas.

The implementation and maintenance tasks provided in this plan will assist PCR in maintaining compliance with agency requirements for project revegetation. It is anticipated that the planting plan will result in improved plant species diversity and soil health compared to the pre-construction agricultural land use conditions.







APPENDIX A: SEED MIX TABLES





VEGETATION MANAGEMENT PLAN, LONE TREE SOLAR PROJECT

Table A.1-A - Table A.1-D. Temporary Cover Crop Seed Mixes*

Table A.1-A Temporary Fall (Late August – Early November) Project Area Cover Crop Seed Mix without Permanent Seed*					
Scientific Name Common Name					
Triticum aestivum Winter Wheat					
Lolium multiflorum	Annual Rye				

Table A.1-B Temporary Fall (Late August – Early November) Project Area Cover Crop Seed Mix with Permanent Seed*					
Scientific Name Common Name					
Triticum aestivum Winter Wheat					
Lolium multiflorum	Annual Rye				

Table A.1-C Temporary Spring-Summer (Mid- April – Mid-August) Project Area Cover Crop Seed Mix <u>without</u> Permanent Seed*				
Scientific Name Common Name				
Avena sativa Seed Oats				
Lolium multiflorum	Annual Rye			

Table A.1-D Spring-Summer and Early Fall (Mid- April – Mid-August) Project Area Cover Crop Seed Mix <u>with</u> Permanent Seed*				
Scientific Name Common Name				
Avena sativa Seed Oats				
Lolium multiflorum	Annual Rye			

*All seed mixes calculated at Pure Live Seed (PLS). Seeding rates are designed for drilling seed in spring through summer. Broadcasting seed and seeding during the dormant season will require 20% increase in PLS rates. Broadcast seed should be packed or harrowed into the soils.

Stantec

Table A.2 Low Grow Native / Non-Native Graminoid Seed Mix for PV Panel and Perimeter Area1

Common Name	Scientific Name	Sun Exposure ²	Ounces per Acre
Western Wheatgrass	Pascopyrum smithii Endophyte Free Variety	SU	15
Path Rush	Juncus tenuous	SU PS	0.2
Side Oats	Bouteloua curtipendula	SU PS	32
Little Bluestem	Schizachyrium scoparium	SU PS	32
Prairie June Grass	Koeleria macrantha	SU PS	2
Kentucky Bluegrass	Poa pratensis Balin Endophyte Free Variety	SU PS	7
Redtop	Agrosostis alba/Agrostis gigantea R Endophyte Free Variety	SU PS	1
Creeping Red Fescue	Festuca rubra Endophyte Free Variety	SU PS	20
Plains Oval Sedge	Carex brevior	SU PS SH	2
Canada Wild Rye	Elymus canadensis Endophyte Free Variety	SU PS	4
Common Spiderwort	Tradescantia ohiensis	SU PS	0.1
Roundhead Lespedeza	Lespedeza capitata	SU PS	0.1
Purple Coneflower	Echinacea pallida	SU	0.1
Stiff Goldenrod	Oligoneuron rigidum	SU PS	0.1
Nodding Wild Onion	Allium cernuum	SU PS	0.5
Partridge Pea	Chamaecrista fasciculata	SU PS	4
Sand Coreopsis	Coreopsis lanceolata	SU PS	4
White Prairie Clover	Dalea candida	SU PS	2
Purple Prairie Clover	Dalea purpurea	SU	2
Black-eyed Susan	Rudbeckia hirta	SU PS	6
Purple Coneflower	Echinacea purpurea	SU	2
Golden Alexanders	Zizia aurea	SU PS	1
Mexican hat	Ratibida columnifera	SU	2
Clover	Trifolium spp.	SU PS	8

¹This mix represents the designed and intended list to be installed, final species composition and rates subject to minor alterations due to market availability and Zoning Administrator approval.

²Sun exposure, SU = Full Sun, PS – Part Shade, as reported in Minnesota Department of Transportation "*Native seed mix design worksheet*" available online at https://www.dot.state.mn.us/environment/erosion/vegetation.html



Table A.3 Pollinator Refuge Prairie Seed Mix

Botanical Name	Common Name	Ounces/Acre
Permanent Grasses:		
Bouteloua curtipendula	Side-Oats Grama	16.00
Carex spp.	Prairie Sedge Species	4.00
Elymus canadensis	Canada Wild Rye	32.00
Koeleria macrantha	June Grass	1.00
Panicum virgatum	Switch Grass	1.00
Schizachyrium scoparium	Little Bluestem	36.00
	Total	90.00
Forbs:		
Amorpha canescens	Lead Plant	0.50
Asclepias syriaca	Common Milkweed	2.00
Asclepias tuberosa	Butterfly Weed	2.00
Baptisia lactea	White Wild Indigo	2.00
Chamaecrista fasciculata	Partridge Pea	10.00
Coreopsis lanceolata	Sand Coreopsis	5.00
Dalea candida	White Prairie Clover	1.50
Dalea purpurea	Purple Prairie Clover	1.50
Desmanthus illinoensis	Illinois Sensitive Plant	3.00
Echinacea purpurea	Broad-Leaved Purple Coneflower	8.00
Eryngium yuccifolium	Rattlesnake Master	2.00
Lespedeza capitata	Round-Headed Bush Clover	2.00
Liatris aspera	Rough Blazing Star	0.50
Lupinus perennis v. occidentalis	Wild Lupine	3.00
Monarda fistulosa	Wild Bergamot	0.50
Oligoneuron rigidum	Stiff Goldenrod	1.00
Parthenium integrifolium	Wild Quinine	1.00
Penstemon digitalis	Foxglove Beard Tongue	0.50
Penstemon hirsutus	Hairy Beard Tongue	1.00
Ratibida pinnata	Yellow Coneflower	4.00
Rudbeckia hirta	Black-Eyed Susan	5.00
Rudbeckia subtomentosa	Sweet Black-Eyed Susan	1.00
Silphium laciniatum	Compass Plant	2.00
Solidago juncea	Early Goldenrod	0.25
Solidago speciosa	Showy Goldenrod	0.50
Symphyotrichum laeve	Smooth Blue Aster	1.00
Symphyotrichum novae-angliae	New England Aster	0.50
Symphyotrichum oolentangiense	Sky-Blue Aster	0.50



Botanical Name	Common Name	Ounces/Acre
Tephrosia virginiana	Goat's Rue	1.00
Tradescantia ohiensis	Common Spiderwort	1.00
Verbena stricta	Hoary Vervain	1.00
Veronicastrum virginicum	Culver's Root	0.25
	Total	65.00



5A

Table A.4 Pollinator Refuge Wetland Seed Mix – Non-Panel/Wetland Buffer Areas

Botanical Name	Common Name	Ounces/Acre
Permanent Grasses/Sedges:		
Bolboschoenus fluviatilis	River Bulrush	4.00
Carex comosa	Bristly Sedge	1.50
Carex cristatella	Crested Oval Sedge	0.50
Carex frankii	Bristly Cattail Sedge	4.00
Carex stricta	Common Tussock Sedge	0.50
Carex vulpinoidea	Brown Fox Sedge	2.00
Eleocharis palustris	Great Spike Rush	0.50
Elymus virginicus	Virginia Wild Rye	16.00
Glyceria striata	Fowl Manna Grass	1.00
Juncus effusus	Common Rush	1.00
Leersia oryzoides	Rice Cut Grass	0.50
Schoenoplectus pungens	Chairmaker's Rush	1.00
Schoenoplectus tabernaemontani	Great Bulrush	2.50
Scirpus atrovirens	Dark Green Rush	1.00
Scirpus cyperinus	Wool Grass	1.00
Calamagrostis canadensis	Canada bluejoint grass	1.00
	Total	38.00
Forbs:		
Acorus americanus	Sweet Flag	1.00
Alisma subcordatum	Common Water Plantain	2.00
Asclepias incarnata	Swamp Milkweed	2.00
Bidens spp.	Bidens Species	2.00
Boehmeria cylindrica	False Nettle	2.00
Doellingeria umbellata	Flat-Top Aster	0.25
Eupatorium perfoliatum	Common Boneset	1.00
Helenium autumnale	Sneezeweed	1.00
Hibiscus spp.	Rose Mallow Species	2.00
Iris spp.	Blue Flag Species	4.00
Lobelia cardinalis	Cardinal Flower	0.25
Lobelia siphilitica	Great Blue Lobelia	0.25
Lycopus americanus	Common Water Horehound	0.25
Mimulus ringens	Monkey Flower	0.50
Penthorum sedoides	Ditch Stonecrop	0.50
Persicaria spp.	Pinkweed Species	2.00
Rudbeckia laciniata	Wild Golden Glow	1.00
Sagittaria latifolia	Common Arrowhead	2.00
Senna hebecarpa	Wild Senna	2.00
Sparganium eurycarpum	Common Bur Reed	4.00





Botanical Name	Common Name	Ounces/Acre
Symphyotrichum lanceolatum	Panicled Aster	0.50
Symphyotrichum puniceum	Bristly Aster	0.50
Thalictrum dasycarpum	Purple Meadow Rue	0.50
Verbena hastata	Blue Vervain	1.50
Verbesina alternifolia	Wingstem	2.00
Vernonia fasciculata	Common Ironweed	2.00
	Total	37.00



7A



APPENDIX B: COMPARISON OF SEEDING METHODS



Table B.1 Comparison Summary Between Drill and Broadcast Seeding Methods

Circumstance	Drill Seeding	Broadcast Seeding	Post Seeding Packing
Soil to Seed Contact	High	Low	Increase soil seed contact
Germination Efficiency	High	Low	Increase germination rates
Extra Seed Required to Achieve Compatibility	No	<u>≥</u> 20%	No extra seed required
Seedbed Preparation	Low	High	Decreases soil preparation
Soil Finishing (packing or rolling)	Low	High	N.A.
Efficiency in Tight Spaces	Low	High	Low
Ability to Seed Under PV Panels	No	High	No
Impact on Erosion Potential	Decrease	Increase	Decreases erosion potentials
Harvested Soybean Field	Yes	Yes	Increase germination rates
Harvested Corn Field (followed by mowing, baling, and light discing)	Yes	Yes	Increase germination rates
Harvested Forage (hay or silage) Field	Yes	Yes	Increase germination rates
Post-construction Seeding Within Array Field	Not advised	Advised	Advised
Potential for Second Seeding Event	Low	High	Decreases





Attachment E: Agricultural Impact Mitigation Plan



Agricultural Impact Mitigation Plan

Lone Tree Substation Solar Project Johnson County, Iowa Stantec Project #:193709077

July 27, 2023

Prepared for:

PCR Investments SP 2 LLC 1334 Brittmoore Rd. Suite 1327 Houston, TX 77043

Prepared by:

Stantec Consulting Services Inc. 2300 Swan Lake Boulevard Suite 202 Independence IA 50644-9708







Table of Contents

ABBF	REVIATIONS	
1.0	PURPOSE AND APPLICABILITY OF PLAN	1.1
2.0	PROJECT OVERVIEW	2.2
2.1	PROJECT COMPONENTS	2.2
	2.1.1 Solar Panels, Arrays, and Racking	
	2.1.2 Electrical Collection System	2.3
	2.1.3 Access Roads	
	2.1.4 Transformer, Switchgear, MV Power Stations, and Mete	ring2.3
	2.1.5 Security Fencing	
2.2	CONSTRUCTION	
	2.2.1 Site Preparation and Clearing	
	2.2.2 Grading	
	2.2.3 Access Road Construction	
	2.2.4 Solar Array Construction	2.7
	2.2.5 Electrical Collection System	
	2.2.6 Transformers, Switchgears, MV Power Stations, and Me	
	2.2.7 Project Security Fencing	
3.0	SOIL LIMITATIONS AND SUITABILITY WITHIN THE SITE	3.9
3.1	IMPORTANT SOIL CHARACTERISTICS	3.9
	3.1.1 Physical Characteristics	3.9
	3.1.2 Selected Soil Classification	
	3.1.3 Construction-Related Interpretations	
	3.1.4 Summary of Major Soil Limitations	3.19
4.0	BMPS DURING CONSTRUCTION AND OPERATION	4.20
4.1	ENVIRONMENTAL MONITOR	
4.2	SOIL SEGREGATION AND DECOMPACTION	
4.3	WET WEATHER CONDITIONS	
4.4	INITIAL GRADING/ROAD CONSTRUCTION/ARRAY CONSTRUCTION	
4.5	FOUNDATIONS	
4.6	TRENCHING	
4.0 4.7	HORIZONTAL DIRECTIONAL DRILL	
4.8	DEWATERING	
4.9	TEMPORARY EROSION AND SEDIMENT CONTROL	
4.10		
4.11	CENTER-PIVOT IRRIGATION WELL IDENTIFICATION AND AVOI	IDANCE4.27
5.0	VEGETATIVE MANAGEMENT PLAN	5.28
6.0	CONTROLING SPREAD OF UNDESIREABALE SPECIES	6.29



i

SENSITIVE AREAS PLAN	7.30
DECOMMISSIONING	8.31
RESTORATION/RECLAMATION OF FACILITY SITE	8.31
OF TABLES	
Soil Physical Characteristics by Project Facility	3.11
2. Selected Soil Classifications by Project Facility	
3. Soils in Selected Construction-related Interpretations by Project Facility	3.18
	DECOMMISSIONING

LIST OF APPENDICES

APPENDIX A

A.1 – SITE LOCATION MAP

A.2 – USDA NRCS SOIL SURVEY REPORT

A.3 – GRADING PLAN

A.4 – SITE PLAN



Abbreviations

AC Alternating current

AIMP Agricultural Impact Mitigation Plan

BMP best management practices

CIPCO Central Iowa Power Cooperative

DC direct current

FEMA Federal Emergency Management Agency

FIRM Flood Insurance Risk Map

EPC engineering, procurement, and construction contractor

GIS Geographic Information System

IDNR Iowa Department of Natural Resources

IPL Interstate Power and Light Company

LCC Land Capability Class

MV medium voltage

Mw Megawatt

NEC National Electric Code

NESC National Electric Safety Code

NRCS Natural Resources Conservation Service

PCR Investments PCR Investments SP 2 LLC

POI point of interconnection

Project Lone Tree Substation Solar Project

PV photovoltaic



Stantec Stantec Consulting Services Inc.

Stormwater General Permit General Permit to Discharge under a National Pollutant

Discharge Elimination System (NPDES) Permit

SSURGO Soil Survey Geographic Database

UDO Unified Development Ordinance

VMP Vegetation Management Plan



Purpose and Applicability of Plan

1.0 PURPOSE AND APPLICABILITY OF PLAN

The objective of this Agricultural Impact Mitigation Plan (AIMP) is to identify measures that PCR Investments SP 2 LLC (PCR Investments) and its contractors will take to avoid, mitigate, repair, and/or compensate for potential agricultural impacts that may result from the construction, operation, and eventual decommissioning of the Lone Tree Substation Solar Project (Project). A 50-acre Project Area was analyzed for this AIMP as shown on Figure 1, Site Location Map (Appendix A). Although agricultural operations would temporarily cease on most of the land on which the Project is constructed during the life of the Project, this Plan outlines measures to ensure the land may be returned to future agricultural use following decommissioning of the Project. This AIMP describes the Best Management Practices (BMPs) that will be used during construction, operation, and decommissioning to minimize long-term impacts to soil.

PCR Investments will obtain authorization under the Iowa Department of Natural Resources (IDNR) General Permit to Discharge under a National Pollutant Discharge Elimination System (NIPDES) Permit (IDNR Stormwater General Permit) prior to the commencement of construction. The NPDES permit will be provided to Johnson County prior to any ground disturbance. Temporary stormwater BMPs will be used during Project construction, and construction will be completed in accordance with the IDNR Stormwater General Permit and a site-specific Erosion Control and Storm Water Management Plan to be developed for the Project.

The site-specific Vegetation Management Plan (VMP) developed for the Project describes the vegetation management practices, including seed mixtures, planting plans and methodologies, and maintenance practices to be conducted during the construction and operational phases of the Project. Permanent perennial vegetative cover will be established throughout the Project Area to manage erosion and increase stormwater infiltration within the Project Area.

This AIMP is separated into six sections: Section 2 provides an overview of the proposed Project and its components. Section 3 identifies soil limitations and suitability within the Project Area; Section 4 describes the BMPs that will be used during construction and operation of the Project; Section 5 summarizes key components of the Vegetative Management Plan in relation to agricultural impact mitigation; Section 6 describes Project Decommissioning and restoration/reclamation of the site.



Project Overview

2.0 PROJECT OVERVIEW

The PCR Investments Lone Tree Substation Project consists of a 7.5-Megawatt (MW) alternating current ("AC") solar power generating facility sited on approximately 50 acres of land zoned Agricultural (AG) and located approximately 3 miles northwest of the Town of Lone Tree, in Johnson County, Iowa. The Project will interconnect to the adjacent Lone Tree Substation, which is owned and operated by the Central Iowa Power Cooperative (CIPCO). PCR Investments selected this site due to capacity at the point of interconnection ("POI"), land availability, existing transmission facilities, existing road infrastructure, environmental considerations, and constructability (i.e., restrictions due to slopes, soils, wetlands, and waterways).

PCR Investments is responsible for all land acquisition, lease agreements, and easements required to build the Project facilities within the Project Area.

2.1 PROJECT COMPONENTS

The Project facilities will include the following major components or systems:

2.1.1 Solar Panels, Arrays, and Racking

Solar panel technology is continually making advancements in both manufacturing and efficiency and is subject to commodity pricing based on the current market demand and available stock. Therefore, the final photovoltaic (PV) module selection will be made when detailed engineering is completed and ordering of the PV modules is possible. At the time of construction, several PV module offerings from different suppliers will be evaluated, and a selection will be made based on the most cost-effective option. The technologies that may be considered are thin-film, polycrystalline silicon, and monocrystalline silicon (including bifacial PV modules), and the final supply of modules may contain a mix of several similar wattages.

Depending on final manufacturer selection, the Project will be designed for between +550W and +650W photovoltaic ("PV") modules with a generating capacity of 7.5 MW AC (8.97 MW DC). The Project PV modules will be mounted on approximately 302 single-axis, galvanized steel, horizontal tracker mounting systems supported by over 2,780 steel piles. The current design consists of three (3) power blocks and a switchgear and meter station. The number of single axis trackers varies per block but is anticipated to be approximately 100. Each power block includes 21 inverters and is connected to approximately 16,308 PV modules. The final design will be developed during the detailed engineering phase and in accordance with the applicable National Electric Safety Code ("NESC") and National Electric Code ("NEC") provisions and any generating certificate or permit conditions.

Foundations or supports will be installed to a minimum depth of five (5) feet below ground surface to minimize impacts from freezing and thawing conditions. Exact embedment depth for the driven pile on which the solar panels are mounted will be determined with final engineering.



Project Overview

2.1.2 Electrical Collection System

Underground 12.47 kilovolt (kV) collector circuits are proposed for the Project. Underground collector circuits are an industry standard method to route the collection cables while eliminating interference with other above ground infrastructure within the Project Area. The total length of AC collection lines installed for the Project will be approximately 0.44 mile (2,325 feet). This includes 0.34 mile (1,813 feet) of AC collection lines within the PV array connecting to the medium voltage (MV) power stations, switchgear, and metering station and a 512-foot generator tie line connecting the PV array area to the Lone Tree Substation. No overhead collector circuit runs are proposed for the Project.

2.1.3 Access Roads

Gravel access roads will connect the facility to existing public roads and provide access to Project equipment during facility operations and maintenance as well as to accommodate emergency access. Permanent internal access roads within the Project Area are expected to be approximately 1.49 miles (7,890.9 feet) in total length and are approximately 12 feet wide. The permanent access road outside the Project Area which will provide access to the site from Iowa Highway 22 is expected to be approximately 68 feet in total length and is approximately 20 feet wide.

2.1.4 Transformer, Switchgear, MV Power Stations, and Metering

The Project will use driven pier foundations and concrete foundations. The skids for the transformers, switchgears, MV power stations, and metering will likely be installed on driven pier foundations but could be placed on concrete foundations if required by soil and geotechnical conditions. The typical pier foundation will be from five (5) feet to 10 feet deep. For driven pier foundations, no excavation is required. For the concrete foundations, soil excavation quantities will be determined in the detailed engineering phase. Foundation dimensions will be determined in the detailed engineering phase. The location and footprint of these facilities within the Project Area for the preliminary design is shown in Figure 1.

2.1.5 Security Fencing

PCR Investments will utilize fencing around the PV solar arrays that is consistent with all applicable codes, including NEC and North American Electric Reliability Council Critical Infrastructure Protection requirements. Fencing is required to safeguard the public health. Array fencing will consist of seven-foot-high woven-wire exclusion fence with wood fenceposts. Fenceposts will be driven into the ground. No concrete foundations will be used for the fenceposts.

2.2 CONSTRUCTION

The Project will be designed in conformance with the version of the International Building Code as required by the authority having jurisdiction, state, and local requirements. The Project will select an engineering, procurement, and construction contractor (EPC) to manage engineering, procurement, and construction of the Project; subcontractors will be selected to perform all



Project Overview

necessary work to construct the Project. Project construction follows a construction sequence in accordance with a construction plan, which will be developed and finalized prior to the start of construction, in conjunction with the selected contractors. The construction plan will be submitted to Johnson County prior to commencement of construction. The following provides a general description of the staging and construction sequence for the Project:

- Tracking pads at construction entry and exit points, and erosion control and stormwater best management practices (BMPs) will be installed as outlined in the Erosion Control Plan prepared for the Project.
- Vegetation removal (crop removal) will start in areas where initial staging and lay-down
 areas will be located. Vegetation removal will continue across the site, sequenced to
 proceed in an organized and cost-efficient manner. Limited brush clearing will commence
 in a similar fashion. Bare ground will be re-seeded, if necessary, in accordance with the
 VMP and Erosion Control Plan prepared for the Project and IDNR requirements.
- Staging and lay-down areas will be developed to receive and store construction materials and equipment. The lay-down areas will also house trailers and parking for personnel and construction-related vehicles.
- Installation of access roads to facilitate continued clearing operations and construction of the facility (limited grading is anticipated as roads will be constructed at grade when possible).
- Delivery of equipment, including piles, aluminum supports/mounting structures, tracking systems, and inverters. The Project will be constructed in blocks and multiple blocks will be constructed simultaneously over time. Deliveries will continue over time in advance of construction of the blocks.
- Solar block construction in sequence, starting with driving pile foundations, then installing aluminum supports/mounting structures onto the piles.
- Delivery of collection system equipment and installation via trenching and directional drilling.
- Delivery and installation of solar PV modules.
- Stabilization and revegetation of disturbed areas will occur in stages as construction of the solar blocks and collection trenches are completed. Bare ground will be re-seeded, if necessary, in accordance with the Erosion Control Plan and IDNR requirements.
- Connect Project Switchgear and Metering and Lone Tree substation and transmission infrastructure.
- Conduct interconnection inspections and testing and Project commissioning.

Site access will be controlled for personnel and vehicles. Permanent security fencing will be installed in advance of or in conjunction with site preparation activities (e.g., grading, mowing, etc.) in advance of large component deliveries. All temporary disturbance areas will be restored in accordance with the Project specific Vegetation Management Plan.

During construction, temporary utilities will serve the construction offices, laydown area, and Project Area. Temporary construction power before the construction of permanent distribution power will either be provided via a local distribution line extended to the Project Area or by



Project Overview

temporary diesel generators. Temporary area lighting will be provided and strategically located for safety and security.

The Project on-site workforce will consist of laborers, craftsmen, supervisory personnel, support personnel, and construction management personnel. The construction crews will have approximately 90 to 100 direct workers for the Project. Construction of the Project will generally occur between 7:00 a.m. and 5:00 p.m., Monday through Friday. Additional hours may be necessary to make up schedule deficiencies or to complete critical construction activities. During the start-up phase of the Project, some activities (such as equipment and system testing) may continue 24 hours per day, 7 days per week. Construction hours will comply with local permit requirements.

Construction of the Project is currently expected to require approximately 8 months, which includes mobilization, construction/installation, and commissioning/testing to achieve the targeted commercial operations date of Q2 2025 (dependent upon Johnson County permit approvals).

The Project will require different equipment types depending on the phase of construction. The first phase consisting of civil work and road building will require dozers, motor graders, and rollers. The pile-driving phase will utilize pile drivers. After pile driving, the installation of racking and panels will be supported mainly by skid steers and telehandlers. Directional drilling equipment for installation of the collection line will be mobilized to the site on low-profile flatbed trailers. For other Project components including the transformers, switchgears, MV power stations, and metering; small cranes, bucket trucks, and forklifts will be used to place equipment. Other support equipment such as skid steers, ATVs, and forklifts will also be used.

Delivery trucks will consist of standard, legal load (80,000 pounds or less) over-the-road flatbed and box trucks and will have standard turning radii. Vehicles used inside the arrays will be suitable for the engineered internal access roads and turn-arounds. Equipment typically used in construction and operation of utility scale solar facilities are generally similar in weight or less than equipment typically used in annual agricultural operations. Construction equipment distributes loads widely resulting in similar tire pressure distribution and contact pressures. During construction of a solar facility, the number of vehicle passes in the same wheel tracks is limited, with the exception of vehicles on internal access roads. During construction there will be a concentration of vehicle passes near the site entrances.

2.2.1 Site Preparation and Clearing

The Solar Production Area is defined as all portions of the Project facilities located inside the proposed fencing of the site. These areas include the panels and associated facilities such as medium voltage power stations, access roads, and underground collector lines. During construction most of these areas will be used for accessing panel locations and for temporarily staging materials and equipment.

Under existing conditions, the Project Area consists of active agriculture under row crop production with one herbaceous wetland drainage swale and one stream corridor. Prior to the commencement of construction, site vegetation will be evaluated to determine which areas will be mowed, left undisturbed or will require pre-seeding. Areas with limited vegetation due to past farming operations or disruption of vegetation due to civil construction activities will be seeded



Project Overview

and stabilized in a timely manner. Portions of the site not utilized for the Project facilities or not impacted during construction will remain vegetated however may be overseeded to promote additional vegetation as described in the VMP.

Anti-tracking pads will be installed at the construction exits. Temporary perimeter sediment controls and diversions will be installed concurrent with the progress of land clearing and grubbing activities. Prior to any clearing, the limit of disturbance will be surveyed and marked in the field. This limit constitutes the limit of soil disturbance. Work will not be conducted within the stream corridor, the wetland, or their buffers unless authorized by Johnson County and by permit from the IDNR and U.S. Army Corps of Engineers, as applicable. Based on the preliminary design, the wetland and the stream corridor within the Project Area have been avoided and no impacts to wetlands or waterways or their buffers are proposed or authorized.

A land surveyor will obtain or calculate Project benchmark, grades, elevations and alignment data from final design plans and detail drawings which inform control staking to establish the Project alignments in advance of construction commencement. During construction, these alignment control points will be reestablished as needed.

2.2.2 Grading

Site grading activities will only occur in select areas where elevations need to be modified to accommodate tracker/racking system slope tolerances, site drainage, access roads, laydown areas; and foundations for the transformers, switchgears, MV power stations, and metering. This approach to grading minimizes impacts and/or preserves existing soil and root structures, topsoil nutrients, seed base, and pre-construction site hydrology.

Grading consists of excavation and soil stabilization of earth as required to meet solar array design load requirements. Grading within the solar array area will match existing grades as closely as possible, however some existing contours may require smoothing for access purposes. To the extent practical, grading of an area will take place shortly before trenching and then again post installation of Project components to minimize the area of open, uncovered ground present at all times during construction. The portions of the Project Area that need to be graded are expected to result in a balanced cut-and-fill quantity of grading to maintain the existing conditions to the extent practical for the protection of the equipment and facilities. Where grading occurs on site, topsoil will be salvaged in areas where cut will be greater than the topsoil depths and those areas where subsoil fill will be placed. Once all cut/fill is completed the topsoil will be replaced.

Materials suitable for soil stabilization and backfill will be stockpiled at designated locations using appropriate segregation and erosion control methods. Materials unsuitable for compaction, such as debris and large rocks, will be stockpiled at designated locations for disposal at an acceptable off-site location. Contaminated materials are not anticipated, but if any are encountered during excavation, they will be disposed of in accordance with applicable laws, ordinances, regulations, and standards.

2.2.3 Access Road Construction

Permanent access roads will consist of an improved aggregate base. Roads will be constructed as close to existing grade as possible so that existing sheet flow and drainage patterns are



Project Overview

maintained. Erosion control devices will be maintained throughout grading and stabilization according to the Erosion Control Plan. Permanent access roads will be maintained for the life of the Project.

Permanent aggregate base access roads will be constructed by first removing the topsoil and organic material, compacting the subgrade, and constructing the road according to civil design requirements. Topsoil will be windrowed to the edges of the road area and distributed along the roadway edge after fill and aggregate installation. Geotextile matting will be installed prior to placement of aggregate to prevent mixing with native subsoil. A layer of road base will then be added and compacted. Road aggregate or fill will be a local pit run aggregate material. Upon completion of detailed engineering, the aggregate specifications will be available for construction quality assurance.

2.2.4 Solar Array Construction

Once grading activities are complete, the racking system supports will be constructed using steel piles driven into the ground. Driven steel pile foundations are typically used where high load bearing capacities are required. The pile is driven using a pile driver (hydraulic ram), which requires two workers. Soil disturbance would be restricted to the hydraulic ram machinery, about the size of a small tractor, temporarily disturbing soil at each pile insertion location.

Tracker mounting assemblies may be assembled at the Project laydown yard and transported to the array blocks prepared for installation; they can also be assembled at the point of installation. Tracker mounts are then fixed to prepared support foundations using forklifts and tractors. During array and racking assembly, multiple crews and various types of vehicles will be working within the Project Area.

These vehicles include flatbed trucks for transporting array components, small all-terrain vehicles, and pick-up trucks used to transport equipment and workers throughout the Project Area. Modules will be staged in advance throughout the Project Area and be brought to specific work areas for installation by wagon-type trailers pulled by skid steers. The Solar modules will be installed by multiple crews using hand tools.

2.2.5 Electrical Collection System

Collection system cabling will be installed in upland areas using one of three methods as needed: a chain-driven trenching machine, excavator, cable laying plow, MV cable trailer, or plow equipment pulled by a bulldozer. The trencher will cut an exposed trench approximately 1 foot wide by 3 to 4 feet deep depending on the type of cable installation. Soil disturbance from the trenching machines would be restricted to the trenching machine tracks. Once cables are installed, the trenches would be backfilled using a grader or small bulldozer and a compaction machine. See Section 4.6 for further description of BMP measures to be implemented during trenching activities.

The horizontal directional drill method will be used to install collection system under two public roadways, Sioux Avenue SE and Highway 22 SE, as described in Section 4.7.



Project Overview

2.2.6 Transformers, Switchgears, MV Power Stations, and Metering

The transformers, switchgears, MV power stations, and metering will be placed on footers with gravel pad foundations that will be designed to specifications necessary to meet the local geotechnical conditions. Each component will sit on top of a slab foundation with rebar on center in each direction. A pull box for cable penetrations will be located directly under the transformer, switchgear, MV power station, and metering to facilitate through-floor cable connections. After the collection system is installed and foundations are poured, the transformer, switchgear, MV power station, and metering units will be installed into position. Transformer, switchgear, MV power station, and metering units will be lifted by crane off the manufacturer's delivery truck and set directly onto the pre-poured foundation.

The Contractor will use an appropriately sized rough-terrain crane to lift and set each unit. After the unit is properly set and anchored, the Contractor will connect the collection cabling previously installed in the adjacent trenches to the unit.

2.2.7 Project Security Fencing

Array fencing will consist of seven-foot-high woven-wire exclusion fence with wood fenceposts. Fenceposts will be driven into the ground. No concrete foundations will be used for the fenceposts. Final fence and post specifications will be determined by the EPC.

Soil Limitations and Suitability Within the Site

3.0 SOIL LIMITATIONS AND SUITABILITY WITHIN THE SITE

Soil varies considerably in its physical and chemical characteristics that strongly influence the suitability and limitations that soil has for construction, reclamation, and restoration. Major soil properties include:

- soil texture;
- · soil slope;
- drainage and wetness;
- fertility and topsoil characteristics; and
- presence of stones, rocks, and shallow bedrock.

Interpretative limitations and hazards for construction and reclamation are based to a large degree on the dominant soil properties, and include:

- prime farmland status;
- hydric soil status;
- susceptibility to wind and water erosion;
- susceptibility to compaction;
- fertility and plant nutrition; and
- drought susceptibility and revegetation potential.

3.1 IMPORTANT SOIL CHARACTERISTICS

The Soil Survey Geographic Database (SSURGO) is the digitized county soil survey and provides a Geographic Information System (GIS) relating soil map unit polygons to component soil characteristics and interpretations. Soil map unit polygons in the SSURGO database were clipped to the Project Area and major Project components including:

- Solar Array Area
- Electrical Collection Line
- Generator Tie Line
- Access Roads
- Switchgear and Metering
- Transformer, Switchgear, and MV Power Station

•

The acreage of major Project component physical properties, classifications, and limitation interpretations important for construction, use, revegetation, and reclamation were determined by spatial query of the SSURGO. A Custom Soil Resource Report for the Project Area which includes a SSURGO Map and descriptions of each map unit is provided Appendix A.

3.1.1 Physical Characteristics

Selected physical characteristics of site soils are broken down by acreage with the 50-acre Project Area in Table 1.



Soil Limitations and Suitability Within the Site

Soil texture affects water infiltration and percolation, drought tolerance, compaction, rutting, and revegetation among other things. Soil texture is described by the soil textural family which indicates the range of soil particle sizes averaged for the whole soil. Most of the soils within the Project Area (49.8 acres, 98.6 percent) are classified as silt loams indicating soils dominated by soil particles in the fine silt fraction, and <28 percent clay particles and 20-50 percent sand particles.

Slope affects constructability, water erosion, revegetation, compaction and rutting, among other properties. Approximately 49.9 acres, (99.8 percent) of the soils within the Project Area are nearly level soils with representative slopes falling within the 0 to 5 percent slope range. The remainder of the soils (0.1 acres, 0.2 percent) have representative slopes in the >5 to 8 percent class. No soils within the Project Area have representative slopes greater than 8 percent.

Soil drainage indicates the wetness in the soil profile along with the speed at which internal water moves. Soil Drainage affects constructability, erosion by wind and water, and revegetation success. Approximately 37.3 acres (74.6 percent) of the soils within the Project Area are either somewhat poorly drained, poorly drained, or very poorly drained, indicating low infiltration rates due to landscape positions and or clay percentages. The remaining 12.7 acres (25.4 percent) are well drained.

Topsoil depth affects soil plant nutrition and surface soil structure. To maintain soil productivity, soils with thick topsoil will require larger areas for storage of larger volume of topsoil stripped from permanent infrastructure footprints such as permanent access roads, transformers, switchgear, MV Stations, and metering. According to SSURGO mapping, approximately 23.8 acres (47.6 percent) of the soils within the Project Area contain 6 to 12 inches of topsoil. 26.2 acres (52.4 percent) of the soils contain 12 to 18 inches of topsoil. Topsoil depth is also correlated to soil order. The most abundant soil order within the Project Area are Alfisols (29.8 acres, 59.6 percent), and are characterized by moderately leached soils that have relatively high native fertility. Mollisols are characterized by a significant accumulation of organic matter in the topsoil and comprise 20.2 acres, or 40.4 percent). A soil analysis will be conducted prior to construction to determine topsoil depths within the Project Area. The results of the soil analysis will be provided to the County prior to construction, per section DD.6A.b.ii.

The presence of bedrock near the soil surface and rocks and stones in the soil profile affects constructability and revegetation. No soils in the Project Area are shallow to bedrock or have stones at the soil surface or within the soil profile

Soil Limitations and Suitability Within the Site

Table 1. Soil Physical Characteristics by Project Facility

	Total	Textural Class ²	Slope F	Drainage Class⁴				Topsoil Thickness ⁵				
Project Facilities	Acres ¹	Silt loam	0-5	>5-8	W	SP	Р	VP	>6-12	>12-18		
	Acres											
Access Roads	2.2	2.2	2.2	<0.1	0.6	0.5	0.3	0.8	1.9	0.3		
Collection Line	<0.1	<0.1	<0.1	0.0	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1		
Generator Tie Line	0.5	0.5	0.5	0.0	<0.1	0.1	0.3	0.1	0.5	<0.01		
Perimeter Area Outside the Solar Array Area	0.9	0.9	0.8	<0.1	0.3	0.1	0.2	0.3	1.3	0.3		
Perimeter Area Inside the Solar Array Area	15.1	14.3	15.1	<0.1	4.2	2.7	1.0	7.2	4.4	10.0		
Switchgear and Metering	<0.01	<0.01	<0.01	0.0	<0.01	0.0	<0.01	0.0	<0.01	<0.01		
Solar Array	31.0	31.0	31.0	0.0	7.6	8.9	4.6	10.0	15.7	15.3		
Substation	0.3	0.3	0.3	0.0	0.0	<0.01	0.0	0.3	0.0	0.3		
Transformer, Switchgear, MV Power Stations	<0.1	<0.1	<0.1	0.0	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1		
Total	50.0	49.8	49.9	0.1	12.7	12.3	6.4	18.6	23.8	26.2		



Soil Limitations and Suitability Within the Site

- Total acres of Project features that are anticipated to be disturbed by supporting construction equipment traffic, excavation, and grading. Data obtained by merging project facility polygons with the SSURGO spatial data in ArcGIS.
- Data available directly from the Natural Resources Conservation Service SSURGO2 spatial or attribute database via geospatial query of the spatial or attribute data.
- Representative slope values are taken directly from the SSURGO database. The SSURGO2 database provides representative slope values for all component soil series. Slope classes represent the slope class grouping in percent that contains the representative slope value for a major component soil series. For example, a soil mapped in the 2-6% slope class has an average slope of 4%, which is within the 0-5% slope range.
- ⁴ Drainage class as taken directly from the SSURGO database: "E" Excessively drained; "SE" Somewhat excessively drained; "W" Well drained, "MW" Moderately well drained; "VP" Very poorly drained; "P" Poorly drained; "SP" Somewhat poorly drained.
- ⁵ Topsoil thickness is the aggregate thickness of the A horizons described in the SSURGO database.



Soil Limitations and Suitability Within the Site

3.1.2 Selected Soil Classification

Selected classification information for site soils is broken down by acreage with the 50-acre Project Area in Table 2.

Natural Resources Conservation Service (NRCS)-designated prime farmland soils have the best combination of physical and chemical characteristics for producing food, feed, forage, fiber, and oilseed crops and are also available for these uses.49.9, (99.8 percent) of the soils in the Project Area are classified as Prime Farmland and Prime Farmland if Drained.

The NRCS also recognizes farmlands of statewide importance, which are defined as lands other than prime farmland that are used for production of specific high-value food and fiber crops (e.g., citrus, tree nuts, olives, fruits, and vegetables). Farmlands of statewide importance have the special combination of soil quality, location, growing season, and moisture supply needed to economically produce sustained high quality or high yields of specific crops when treated and managed according to acceptable farming methods. Farmland of statewide importance is similar to prime farmland but with minor shortcomings such as greater slopes or less ability to store soil moisture. The methods for defining and listing farmland of statewide importance are determined by the appropriate State agencies, typically in association with local soil conservation districts or other local agencies. In addition to the 49.9 acres of Prime Farmland, <0.1 acres (<0.2 percent) of soils in the Project Area are classified as farmland of statewide importance.

Land Capability Class (LCC) is a system of grouping soils primarily on the basis of their capability to produce common cultivated crops and pasture plants without deteriorating over a long period of time. Capability classes are designated by the numbers 1 through 8. The numbers indicate progressively greater limitations and narrower choices for practical use. The classes are defined as follows:

- Class 1 soils have slight limitations that restrict their use.
- Class 2 soils have moderate limitations that restrict the choice of plants or that require moderate conservation practices.
- Class 3 soils have severe limitations that restrict the choice of plants or that require special conservation practices, or both.
- Class 4 soils have very severe limitations that restrict the choice of plants or that require very careful management, or both.
- Class 5 soils are subject to little or no erosion but have other limitations, impractical to remove, that restrict their use mainly to pasture, rangeland, forestland, or wildlife habitat.
- Class 6 soils have severe limitations that make them generally unsuitable for cultivation and that restrict their use mainly to pasture, rangeland, forestland, or wildlife habitat.
- Class 7 soils have very severe limitations that make them unsuitable for cultivation and that restrict their use mainly to grazing, forestland, or wildlife habitat.

Soil Limitations and Suitability Within the Site

Class 8 soils and miscellaneous areas have limitations that preclude commercial plant
production and that restrict their use to recreational purposes, wildlife habitat, watershed,
or esthetic purposes.

Capability subclasses are designated by adding a letter, e, w, s, or c, to the class numeral. The letter e shows the risk of erosion unless close-growing plant cover is maintained; w shows that water in or on the soil interferes with plant growth or cultivation; s shows limitation due to shallow, droughty, or stony soil; and c, shows limitation due to climate that is very cold or very dry. In class 1 there are no subclasses because the soils of this class have few limitations.

Soils within the Project Area are in LCC 1, 2w, 2e, 3w, and 3e. Approximately 18.8 acres (37.6 percent) are in LCC 3w and have severe limitations due to water in or on the soil surface. 0.9 acres (1.8 percent) of soils are in LCC 3e and have severe limitations to parent material and susceptibility to wind erosion. There are 6.4 acres (12.8 percent) and 12.0 acres (24.0 percent) in LCC's 2w and 2e. 11.9 acres (23.8 percent) are in LCC 1.

Hydric soils are soils in poorly drained to very poorly drained drainage classes and are rated as hydric, predominantly hydric, partially hydric, predominantly non-hydric, and non-hydric. Hydric soils are a component of regulated wetlands and can be used to indicate areas with potential jurisdictional wetlands. Approximately half of the soils are hydric (25.6-acres, 51.2 percent), with (24.4 acres, 48.8percent) being considered non-hydric soils.

Soil Limitations and Suitability Within the Site

Table 2. Selected Soil Classifications by Project Facility

	Total	Prime Farmland ²	Farmland of Statewide Importance							
Project Feature	Acres ¹			1	2w	2e	3w	3e	Hydric Soil ⁴	
	Acres									
Access Roads	2.2	2.2	<0.1	0.5	0.3	0.6	0.8	<0.1	1.1	
Collection Line	<0.1	<0.1	0.0	<0.1	<0.01	<0.1	<0.01	0	<0.1	
Generator Tie Line	0.5	0.5	0.0	0.1	0.3	<0.01	0.1	0	0.4	
Perimeter Area Outside the Solar Array Area	0.9	0.9	<0.1	0.1	0.2	0.2	0.3	0.1	0.9	
Perimeter Area Inside the Solar Array Area	15.1	15.1	<0.1	2.7	1	3.4	7.2	0.8	8.2	
Switchgear and Metering	<0.01	<0.01	<0.01	0	<0.01	<0.01	0	0	<0.01	
Solar Array	31.0	31.0	0.0	8.5	4.6	7.8	10.1	0	14.7	
Substation	0.3	0.3	0.0	0	0	0	0.3	0	0.3	
Transformer, Switchgear, MV Power Stations	<0.1	<0.1	0.0	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	
Total	50.0	49.9	<0.1	11.9	6.4	12.0	18.8	0.9	25.6	

Total acres of Project features that are anticipated to be disturbed by supporting construction equipment traffic, excavation, and grading. Data obtained by merging project facility polygons with the SSURGO spatial data in ArcGIS.



Data available directly from the NRCS SSURGO2 spatial or attribute database via geospatial query of the spatial or attribute data. Includes all areas Prime Farmland and Prime farmland if drained or irrigated.

Capability subclasses are designated by adding a letter, e, w, s, or c, to the class numeral. The letter e shows the risk of erosion unless close-growing plant cover is maintained; w shows that water in or on the soil interferes with plant growth or cultivation; s shows limitation due to shallow, droughty, or stony soil; and c, shows limitation due to climate that is very cold or very dry.

Data available directly from the NRCS SSURGO2 spatial or attribute database via geospatial query of the spatial or attribute data. Includes Hydric, Predominantly hydric, and Partially hydric soil.

Soil Limitations and Suitability Within the Site

3.1.3 Construction-Related Interpretations

Selected construction-related interpretative data for site soils are broken down by acreage within the Project Area in Table 3.

For the purposes of this report, a highly erodible rating consists of soils with an NRCS Soil Erodibility Factor (Kw) rating of 0.4 to 0.69. Soil Erodibility Factor (Kw) describes the susceptibility of soil detachment by water runoff or raindrop impact and predicts long-term average soil loss from sheet and rill erosion. The Kw is affected by soil texture, organic matter content, size and stability of soil aggregates, permeability, and depth to a restrictive layer. Soil erosion potential is also influenced by slope and exposure to erosion mechanisms. Soil erosion increases in inverse proportion to the effectiveness of vegetation cover (i.e., soils with denser vegetation cover are less susceptible to erosion). Removal of vegetation associated with construction activities, whether by direct stripping or by other mechanical means, greatly increases erosion potential. 49.2 acres (98.4 percent) of the project area contains soil moderate Kw.

Wind erosion was evaluated using the wind erodibility group. Highly wind erodible soils are medium textured, relatively well drained soils with poor soil aggregation, resulting in soils with soil surfaces dominated by particles that can be dislodged and carried by the wind. None of soils within the Project area are highly wind erodible.

Soils prone to compaction and rutting are subject to adverse changes in soil porosity and structure as a result of mechanical deformation caused by loading by equipment during construction. Factors considered are soil texture, soil organic matter content, soil structure, rock fragment content, and the existing bulk density. Each of these factors contributes to the soil's ability to resist compaction and rutting. All soils within the Project area have a medium rating for compaction. According to SSURGO, the potential for compaction is significant. After the initial compaction (i.e., the first equipment pass), this soil is able to support standard equipment with only minimal increases in soil density. Therefore, 49.1 acres (98.2percent) of wet soils may be inherently susceptible to rutting.

Two basic methods for installing ground-based solar array systems are installation via pilings or anchoring via precast footing or ballasted trays. The penetrating method includes driven piles, screw augers, or concrete piers to provide a stable foundation. The ease of installation and general site suitability of soil-penetrating anchoring systems depends on soil characteristics such as rock fragment content, soil depth, soil strength, soil corrosivity, shrink-swell tendencies, and drainage. The anchoring system utilizes precast ballasted footings or ballasted trays on the soil surface to make the arrays too heavy to move. The site considerations that impact both basic systems are slope, slope aspect, wind speed, land surface shape, flooding, and ponding. Project Area site conditions and cost dictate which method is employed. Installation of these systems requires some power equipment for hauling components and either driving piles, turning helices, or boring holes to install the anchoring apparatus. As described in Section 2.1.1 and Section 2.2.4, driven steel piles are planned to be used for installation of the racking system for the Project. SSURGO provides interpretive rating classes for soil suitability ratings for "Ground-based Solar Panel Arrays."



Soil Limitations and Suitability Within the Site

SSURGO soil suitability ratings for Ground-based Solar Panel Arrays include "Not Limited", "Somewhat Limited", or "Very Limited", depending on the type of solar array construction methods. Overall, 49.3 acres (98.6 percent) of the soils within the Project Area are rated as Very Limited. The limitations of the site-specific soils are not due to the other construction-related soil interpretations. Rather, the limitations are due to frost action in the topsoil, low soil strength, a shallow depth to a saturated zone, and shrink-swell activities as a result of soil mineralogy. A geotechnical survey conducted by a qualified geotechnical firm can determine the most suitable installation method.

The final analyzed soil limitation is drought susceptibility. Even under relatively normal precipitation, some soils are prone to having drought stress occur in the plants growing on them. Soil may have an inherently low ability to store water which is typical of sandy or shallow soils or soils having a high content of rock fragments. Drought ratings include severely drought vulnerable, drought vulnerable, moderately drought vulnerable, somewhat drought vulnerable, and slightly drought vulnerable.

In the severely drought vulnerable rating, the soil and site properties are such that the plants growing on the soil must be very drought tolerant even in years with normal amounts of rainfall. The soil may have very low water storage capacity. In the drought vulnerable rating, drought conditions generally occur every year and the soil may have low water storage capacity. Under moderately drought vulnerable soils, annual precipitation is generally adequate for plant growth. In dry years some water stress may occur. Slightly drought vulnerable soils are either in low-lying parts of the landscape where plant roots may exploit near-surface ground water or are in areas where precipitation is much higher than potential evapotranspiration. In an extremely dry year plants may be water stressed on these soils.

Soils susceptible to drought include coarse textured soils in moderately well to excessive drainage classes. Revegetation during seed germination and early seedling growth is severely compromised during dry periods on droughty soils. Approximately 0.9 acres (1.8 percent) of the soils within the Project Area are moderately susceptible to drought. The remaining 49.1 acres (98.2 percent) of the soils within the Project Area are either slightly or somewhat susceptible to drought.

Soil Limitations and Suitability Within the Site

Table 3. Soils in Selected Construction-related Interpretations by Project Facility

	Total	Kw ² Wind Erodibility ³		Compaction	Rutting Hazard ⁵		Solar Array ⁶	Dr	Drought Vulnerable ⁷		
Project Facility	Acres ¹	Moderate		Prone ⁴	Moderate	Severe	Very Limited	Slightly Vulnerable	Somewhat Vulnerable	Moderately Vulnerable	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Acres										
Access Roads	2.2	2.2	0.0	2.2	0.0	2.2	2.2	1.6	0.6	0.0	
Collection Line	<0.1	<0.1	<0.1	<0.1	0.0	<0.1	<0.1	<0.1	<0.1	0.0	
Generator Tie Line	0.5	0.5	0.0	0.5	0.0	0.5	0.5	0.5	<0.01		
Perimeter Area Outside the Solar Array Area	0.9	0.9	0.0	0.9	0.1	0.8	1.0	0.8	0.2	0.1	
Perimeter Area Inside the Solar Array Area	15.1	14.3	0.0	15.1	0.8	14.3	14.3	10.9	3.4	0.8	
Switchgear and Metering	<0.01	<0.01	<0.01	<0.01	0.0	<0.01	<0.01	<0.01	<0.01	0.0	
Solar Array	31.0	31.0	0.0	31.0	0.0	31.0	31.0	23.2	7.8	0.0	
Substation	0.3	0.3	0.0	0.3	0.0	0.3	0.3	0.3	0.0	0.0	
Transformer, Switchgear, MV Power Stations	<0.1	<0.1	<0.01	<0.1	0.0	<0.01	<0.01	<0.01	<0.01	0.0	
Total	50.0	49.2	0.0	50.0	0.9	49.1	49.3	37.1	12.0	0.9	

¹ Total acres of Project features that are anticipated to be disturbed by supporting construction equipment traffic, excavation, and grading. Data obtained by merging solar facilities and easement polygons with the SSURGO spatial data in ArcGIS.

⁷ Soils are rated Slightly vulnerable, Somewhat drought vulnerable, Moderately drought vulnerable, Drought vulnerable, and Severely drought vulnerable. Soils rated as Somewhat drought vulnerable and Moderately drought vulnerable are represented in this table. No soils within the Project Area are rated as Drought vulnerable, and Severely drought vulnerable.



² Erosion Factor Kw indicates the susceptibility of a whole soil to sheet and rill erosion by water, and is a function of percent silt, sand, organic matter, soil structure, and hydraulic conductivity (Ksat). For the purposes of this report, values range from 0.02 and 0.69. A rating of 0.0-0.24 is Low, a rating of 0.25-0.40 is Moderate, and a rating of 0.40-0.69 is High.

³ Highly Erodible Wind Includes soils in wind erodibility groups 1 and 2.

⁴ Soils are rated Low, Medium, or High based on their susceptibility to compaction from the operation of ground-based equipment for planting, harvesting, and site preparation activities when soils are moist. For soils with a Low rating, the potential for compaction is insignificant. For soil with a Medium rating, the potential for compaction is significant and the growth rate of seedlings may be reduced following compaction. For soil with a High rating, the potential for compaction is significant and the growth rate of seedlings will be reduced following compaction. Soils with a Medium or High rating are represented in this table.

⁵ Rutting potential hazard based on the soil strength as indicated by engineering texture classification, drainage class, and slope. In general, soils on low slopes in wetter drainage classes, and comprised of sediments with low strength will have potential rutting hazards.

⁶ Soils are placed into interpretive rating classes of Not limited, Somewhat limited, or Very limited.

Soil Limitations and Suitability Within the Site

3.1.4 Summary of Major Soil Limitations

3.1.4.1 Water Erodibility "Kw"

The predominant rating for soil susceptibility to water erosion was moderate and is a result of the silt-loam composition in the Project Area's soils. These soils have generally lower particle cohesive forces and detach and erode easily with water movement. Loss of topsoil, whether on stockpiles, nearby areas, or slopes, may be lost and transported into waterways or wetlands furthering potential environmental impairment. Therefore, protecting the soil surface via plant residues, perennial plant cover, cover crops, contouring to control water flows, or water and sediment control structures must be implemented. Runoff and sediment control structures (or BMPs) that can mitigate impacts to water erodible soils include silt fences, straw wattles, or check dams as described in Section 4.10 and the Project-specific Erosion Control Plan. Initial post-construction revegetation efforts and maintenance of vegetation during operations and maintenance will need to consider selecting appropriate vegetation to grow quickly and include regular inspections of erosion controls after precipitation events as described in the VMP.

3.1.4.2 Land Capability Classification

The predominant LCC in the Project Area is 3w, suggesting severe limitations to land use and conservation practices and an added susceptibility to excess water below and above the ground, agreeing with Section 3.1.4.3. These soil interpretations underline the importance of utilizing suitable revegetation and soil conservation methods as described in the VMP.

3.1.4.3 Solar Arrays

Soils within the Project Area are primarily silt loam, somewhat poorly to poorly drained, fine-textured soils. The primary limitations for the soils during construction, operations and maintenance, and decommissioning include saturated soil, frost action, low strength, and corrosion of steel. A geotechnical investigation would identify appropriate methods required for installation of the racking systems and foundations within these soil types. As described in Section 2.2.4, the racking system supports are currently designed to be constructed using steel piles driven into the ground.

3.1.4.4 Compaction & Rutting

PCR Investments will design construction access and manage construction passes to minimize the number of trips occurring on a given soil and will implement wet weather procedures any time that rutting is observed. Deep compaction is not anticipated to be a significant problem as the number of construction equipment passes over a given area is limited, and construction equipment consists of smaller, low-ground- pressure tracked vehicles. Practices to be implement to decompact soils are described in Section 4.2 and the project specific VMP. Factors to be considered regarding wet weather conditions are described in Section 4.3. Rutting will be avoided by use of temporary construction matting as described in Section 4.9. No rutting will occur within the wetland as impact to the wetland has not been proposed or authorized by



BMPs During Construction and Operation

the USACE/IDNR or Johnson County. Based on the preliminary design, the wetland and one stream within the Project Area have been avoided and no impacts to wetlands are proposed.

4.0 BMPS DURING CONSTRUCTION AND OPERATION

The Project will be constructed and operated on property leased by PCR Investments. No direct impacts to adjacent land are expected. The Project is located on farmland occupying a flat to gently rolling sandy glacial terrace above the current floodplain of the Otter Creek in east central lowa. 49.9acres, (99.8 percent) of the farmland within the Project Area is considered prime farmland and <0.1 acres, (<0.2 percent) are considered farmland of statewide importance.

The prevailing topography of the Project Area will not be substantially changed by construction activities, including installation of the foundations for the tracking systems and trenching for the collection system. It is anticipated that panel arrays will be designed and constructed to conform to the existing topography to minimize the need for significant grading. However, some localized grading may be necessary to meet racking tolerances and to construct other project facilities such as the transformer, switchgear, MV power station, and metering. Access roads will be constructed as close to existing grade as possible, maintaining preconstruction hydrologic flow patterns. Upon completion of construction activities, the areas temporarily impacted due to construction activities will be returned to their pre-construction topography.

A final grading plan will be submitted to Johnson County closer to construction, but prior to site disturbance. The final grading plan will show existing and proposed contours for any areas that will require grading. The final grading plan will show the location of perimeter erosion control measures to be used throughout construction, location of stockpiles, location of bore pits, and location and dimensions of road drainage ditches, if proposed.

The sections below describe the best management practices that PCR Investments will implement to maintain soil health, slope stabilization, and infiltration and avoid sedimentation, erosion, spill-related impacts, and encroachment of noxious weeds within the Project Area due to construction and operation of the Project.

4.1 ENVIRONMENTAL MONITOR

PCR Investments will engage a weekly inspection onsite to monitor earthmoving activities during the initial phase of Project construction to ensure appropriate measures are taken to properly segregate and handle the topsoils. The Monitor will have a variety of duties, including but not limited to:

- Perform regular inspections during the major earthmoving phases of Project construction, including trenching, and during activities in the below bullets;
- Observe construction crews and activities to ensure that topsoil is being segregated and managed appropriately;



BMPs During Construction and Operation

- Monitor the site for areas of potential soil compaction (except within access roads) and make specific recommendations for decompaction;
- Make recommendations to PCR Investments' construction manager;
- Assist in determining if weather events have created "wet weather" conditions and provide recommendations to the construction manager on the ability to proceed with construction; and
- Submit reports of PCR Investments' adherence to soil BMPs during the major earthmoving phase of Project construction and upon completion of earthmoving activities to document Erosion Control Plan compliance.
- Reports will be submitted to Johnson County every thirty (30) days during construction, in accordance with the Johnson County Unified Development Ordinance (UDO).

Potential issues with BMPs will be reported directly to PCR Investments' construction manager who will use discretion to either correct the activity or stop work.

4.2 SOIL SEGREGATION AND DECOMPACTION

During construction, PCR Investments will work to protect and preserve topsoil within the Project Area. Protective measures will include separation of the topsoil from subgrade/subsoil materials when earthmoving activities or excavation are conducted during grading, road construction, cable installation, and foundation installation. The depth of the topsoil to be stripped will be a maximum depth of 12 inches or actual depth of topsoil if less than 12 inches or as agreed upon with the landowner. The results of a soil analysis will be conducted and assessed prior to construction to determine the topsoil depths in accordance with Section 8:1.23.BB.6.A.ii. of the Johnson County UDO. The results of the analysis will be provided to Johnson County.

The stored topsoil and subsoil will have sufficient separation to prevent mixing during the storage period. A thin straw mulch layer or geotextile fabric may be used as a buffer between the subsoil and topsoil to facilitate separation of the subsoil and topsoil during the excavation backfill process. Topsoil will not be used to construct field entrances or drives, will not be stored or stockpiled at locations that will be used as a traveled way by construction, or be removed from the property.

During the activities that require temporary excavations and backfilling (i.e., trenching activities) the subgrade material will be replaced into the excavations first and compacted as necessary, followed by replacement of topsoil to the approximate locations from which it was removed. Topsoil will then be graded to the approximate pre-construction contour. PCR Investments will avoid compaction in other areas where it is not required by the design.

Following grading activities that require segregation of topsoils/subsoils, topsoil materials will be re-spread on top of the backfilled and disturbed areas to maintain the overall integrity and character of the pre-construction farmland. Any excess topsoil material would be re-spread within the Project Area at pre-established locations and not relocated off-site. The location and amount of topsoil will be documented to facilitate re-spreading of topsoil after decommissioning.



BMPs During Construction and Operation

Stripped topsoil and subsoil that will be necessary for future reclamation for components such as access road installation and the transformer, switchgear, MV power station, and metering will be removed to suitable locations near the site of removal and spread across existing topsoil for storage.

4.3 WET WEATHER CONDITIONS

Construction in wet soil conditions will not commence or continue at times when or locations where the passage of heavy construction equipment may cause rutting to the extent that the topsoil and subsoil are mixed, or underground drainage structures may be damaged.

During construction, certain activities may be suspended in wet soil conditions, based on consideration of the following factors:

- extent of surface ponding;
- extent and depth of soil erosion, rutting, compaction, and mixing of soil horizons;
- areal extent and location of potential rutting and compaction (i.e., can traffic be rerouted around wet area);
- damage to drain tiles if present; and
- type of equipment and nature of the construction operations proposed for that day.

If adverse wet weather construction impacts cannot be minimized to the satisfaction of PCR Investments, the EPC will cease work in the applicable area until PCR Investments determine that site conditions are such that work may continue.

4.4 INITIAL GRADING/ROAD CONSTRUCTION/ARRAY CONSTRUCTION

A final grading plan will be submitted to Johnson County closer to construction, but prior to site disturbance. The final grading plan will show existing and proposed contours for any areas that will require grading. The final grading plan will show the location of perimeter erosion control measures to be used throughout construction, location of stockpiles, location of bore pits, and location and dimensions of road drainage ditches, if proposed.

Micro-grading or site leveling will likely be necessary prior to array installation to accommodate slope tolerances allowed for by the solar array design. The appropriate depth of topsoil that should be stripped and segregated from other materials during initial grading activities is described in Section 4.2.

During civil work, topsoil will be removed from the cut/fill areas and stored in designated locations for later use. Once topsoil is removed from the cut/fill areas, the sub-grade materials will be removed as required from higher ground elevations and relocated on-site at lower elevations. Prior to relocating sub-grade materials to the lower elevations, topsoil in the low areas will be stripped and set aside before the fill is added, then respread over the new fill. The stored topsoil will be re-spread over the reconditioned sub-grade areas. Newly spread topsoil



BMPs During Construction and Operation

will be loosely compacted and/or "tracked" and the erosion and sedimentation prevention BMPs will be implemented as described in Section 4.10 and in accordance with the Project Erosion Control Plan.

After the majority of the micro-grading activities have been completed, internal access roads will be constructed. Topsoil will be stripped from the roadbeds to a depth of at least 12 inches and will be windrowed to the edges of the roadbed. Windrowing will consist of pushing materials into rows of spoil piles adjacent to the road which will be loosely compacted and/or "tracked" with stormwater and wind erosion BMPs in place. The sub-grade materials will then be compacted. After gravel is installed and compacted to engineers' requirements, the Contractor will shape drainage ditches identified on the final grading plan. Roads shall be constructed at grade to allow for existing sheet flow so that existing drainage patterns are maintained. Previously windrowed topsoil material will be respread around the new gravel material along the road shoulders.

Once grading and road construction is complete, the Contractor can begin the installation of foundation piles for the PV array racking system as described in Section 2.1.1 and 2.2.4. This work will consist of directly driving the pile into the soil with pile drivers. These vehicles would operate on the existing surface of the ground and impacts would be limited to what is typical when vehicles drive over the soil surface. Very little soil disturbance is expected from this activity.

Dust abatement measures may include restriction of vehicle speeds, watering of active areas, watering of stockpiles, watering on public roadways, the application of calcium chloride (or other similarly approved product), track-out control at site exits, and other measures.

4.5 FOUNDATIONS

The skids for the transformer, switchgear, MV power station, and metering will likely be installed on driven pier foundations but could be placed on concrete foundations if required by soil and geotechnical conditions as described in Section 2.1.4. The Contractor will strip topsoil off the area for the foundation, install the pier-type foundations, compact sub-grade materials, re-grade spoils around the foundation area, and then install clean washed rock on the surface. All topsoil stripped from these areas will be pushed outside of the work area and collected into designated spots for later use. These topsoil piles will be windrowed or piled and loosely compacted and/or "tracked" with stormwater and wind erosion BMPs in place. Once construction is advanced, the topsoil piles would be distributed in a thin layer adjacent to the foundation area.

If concrete foundations are used, the foundations will be dug using a rubber-tire backhoe and then rebar and concrete installed and left to cure. After cure and testing of concrete strength is completed, the subgrade spoils will be compacted around the foundations. After the solar equipment is set, the adjacent topsoil will be re-spread around the foundation.



BMPs During Construction and Operation

4.6 TRENCHING

Construction of the Project may require trenching for the installation of both DC and AC collection lines. The typical burial depth for collector circuits is 36 inches. The width of the trench is dependent upon the number of circuits. Typical trench widths are as follows:

- Single Feeder trench width: 12 to 18 inches
- Two Feeder trench: three (3)-foot spacing and three (3) to six-(6) foot trench width
- Four Feeder trench: three (3)-foot spacing and 15-foot to 16-foot trench width

During trenching, topsoil and subgrade materials would be excavated from the trench using typical excavating equipment or backhoes and segregated as described in Section 4.2. The bottom of each trench may be lined with clean fill to surround the cables. PCR Investments anticipates that native subsoil will be rock free, and that no foreign fill will be necessary. After cables have been installed on top of bedding materials in the trench, 1 foot of screened, native backfill will be placed on the cables followed by additional 2 feet of unscreened native backfill trench spoil. This material would be compacted as necessary. The last 1 foot of each trench will then be backfilled with topsoil material only to return the surface to its finished grade.

4.7 HORIZONTAL DIRECTIONAL DRILL

The horizontal directional drill method will be used to install collection system under two public roadways, Sioux Avenue SE and Highway 22 SE. Bore pits will be setback at least 10 feet from stream corridor and wetland buffer boundaries. Based on the preliminary design, the wetland and one stream within the Project Area have been avoided and no impacts to wetlands are proposed. Proper sediment, erosion control, and invasive species control Best Management Practices (BMPs) will be installed/utilized prior to and during construction activities.

HDD boring equipment will be stored either in the Project laydown yard or near the location of the proposed boring. If the boring cannot be completed in one day, overnight storage of equipment will be in upland agricultural areas within 50 feet of the bore pits. Appropriate BMPs and contaminant management (oil absorbent booms, etc.) materials will be put in place prior to leaving the boring area for the day.

A typical bore pit is approximately 10 feet by 20 feet by 6 feet deep. Approximately 1,200 cubic feet (45 cubic yards) of material may be excavated for each pit. The boring will require two bore pits, one on each side of the road being crossed. All materials removed from bore pits will be stored adjacent to the boring with appropriate BMPs installed. Once the boring is completed, the excavated material will be reused as backfill of the pit. Once a final grade is reached, the area will be seeded with a cover crop and permanent seed mixture with appropriate erosion control devices installed (silt fence, erosion matting, etc.), if necessary.



BMPs During Construction and Operation

4.8 DEWATERING

Dewatering may be required for excavations such as bore pits. PCR Investments will develop a Dewatering Plan and provide training to personnel directly involved with discharge activities. PCR Investments shall ensure that on-site personnel directly involved with discharge activities have access to the Dewatering Plan at all times while at the discharge location(s). Dewatering will be performed in accordance with applicable appropriation and discharge permits, and at a minimum, will comply with the following procedures:

- Floats will be placed on pump intakes.
- The excavation will be dewatered into a well-vegetated upland area with an appropriate energy-dissipation device. Whenever possible, the slope at the point of discharge will be away from any streams or wetlands. Soils in the vicinity of the discharge point will be assessed before discharge. Topography between the discharge point and the nearest receiving waters will be evaluated for erosion potential.
- If the flow of a discharge cannot be kept out of streams, wetlands, drainage ditches, etc., the discharge shall be filtered by one of the methods described below. Dewatering discharge will be directed into a sediment filter bag or a straw bale/silt fence dewatering structure which discharges into a vegetated area to prevent heavily silt-laden water from flowing into wetlands and waterbodies.
- · Only non-woven fabric filter bags will be used for dewatering.
- Filter bags and dewatering structures must be maintained in a functional condition throughout dewatering activity (e.g., clogged or ripped bags must be replaced) and will be attended at all times during active pumping. Accumulated sediment from the filter bags shall be spread in an approved upland location.
- PCR Investments will comply with applicable permit requirements, including tracking volumes of water pumped, obtaining water samples (if needed) for testing, and taking necessary measures to meet effluent limitations.

4.9 TEMPORARY EROSION AND SEDIMENT CONTROL

PCR Investments will prevent excessive soil erosion on lands disturbed by construction by adhering to an Erosion Control Plan required under the NPDES permitting requirement that will be administered by the IDNR and under the Johnson County UDO. Prior to construction, the Project's Engineer of Record will outline the reasonable methods for erosion control and prepare the Erosion Control Plan.



BMPs During Construction and Operation

These measures would primarily include silt fencing on the downside of all hills and near wetlands. This silt fencing would control soil erosion via stormwater. Check dams and straw waddles will also be used to slow water during rain events in areas that have the potential for high volume flow. In addition, the Contractor can use erosion control blankets on any steep slopes, although given the site topography, this BMP will not likely be required. Lastly, as outlined above, topsoil and sub-grade material will be piled and loosely compacted and / or "tracked" while stored. The BMPs employed to mitigate wind and stormwater erosion on these soil stockpiles will include installing silt fence on the downward side of the piles as needed and installation of straw waddles if these spoil piles are located near waterways.

The Erosion Control Plan will designate onsite Erosion Control Plan inspectors to be employed by the Contractor for routine inspections as well as for inspections after storm events per the plan outlined in the Erosion Control Plan. The Erosion Control Plan will consider wind erodibility and best practices as such including methods such as wetting exposed soils to minimize dust during construction activity and maintaining good vegetative cover (both cover crops and permanent vegetation).

Engineered Erosion Control Plan will be submitted to the IDNR prior to construction start and designated onsite Erosion Control Plan inspectors will be employed by the Contractor for routine inspections as well as for inspections after storm events per the plan outlined in the Erosion Control Plan.

4.10 DRAIN TILE IDENTIFICATION, AVOIDANCE AND REPAIR

PCR Investments or its EPC contractor will work to identify existing drain tile systems within the Project Area and may include the use of local drain tile contractor. Existing tile will be located by analyzing existing documentation, reviewing aerial photography, and interviewing Project participating landowners and adjacent landowners to identify approximate or expected locations of the tile lines. If the location of the existing tile system is not accurately determined, a physical tile location effort will be undertaken. Physical location of tile will be attempted using ground penetrating radar in the areas of suspected tile locations, or GPS-enabled line scope. If visible surface inlets are identified, a tile probe will be used to locate the tile line and determine its direction from the inlet. The tile line will then be mapped with a GPS locator so it can be avoided during construction.

Care will be taken during construction to: a) avoid drain tile locations within the Project Area, b) re-route drain tile away from locations which could be damaged during construction, or c) in the case of fields with pattern tile networks, work with applicable landowners to establish acceptable criteria for rerouting, replacing or abandoning in place drain tile that is within a photovoltaic (PV) array.

If non-abandoned drain tile is damaged, the damaged segment will be repaired in place or, if necessary, relocated as required by the condition and location of the damaged tile. In the event drain tile damage becomes apparent after commercial operation of the Project, the drain tile will be repaired in a manner that restores the operating condition of the tile at the point of repair and will have the capacity, depth, and appropriate slope to ensure the new tile line performs adequately for the line it is replacing. All repair, relocation, or rerouting referenced above will be



BMPs During Construction and Operation

consistent with these policies: a) materials will be of equal or better quality to those removed or damaged; b) work will be completed as soon as practicable, taking into consideration weather and soil conditions; c) work will be performed in accordance with industry-accepted, modern methods; and d) in the event water is flowing through a tile when damage occurs, temporary repairs will be promptly installed and maintained until such time that permanent repairs can be made. PCR Investments will minimize interruption of any drainage on site or on any neighboring farms that may drain through the property.

Repairs or rerouting will be performed using a small to mid-sized excavator. Laser equipment will be used to ensure proper grading of the tile. In the event a line of significant size and length needs to be rerouted or installed; a commercial drainage plow could be used. The drainage plow typically utilizes GPS-grade control to ensure tile is installed to specified slopes. The following considerations will also apply:

- Tiles will be repaired with materials of the same or better quality as that which was damaged.
- Tiles repairs will be conducted in a manner consistent with industry-accepted methods.
- Before completing permanent tile repairs, tiles will be examined within the work area to check for tile that might have been damaged by construction equipment. If tiles are found to be damaged, they will be repaired so they operate as well after construction as before construction began.
- PCR Investments will make efforts to complete permanent tile repairs within a reasonable timeframe, considering weather and soil conditions.

4.11 CENTER-PIVOT IRRIGATION WELL IDENTIFICATION AND AVOIDANCE

If center-pivot irrigation systems are present within the Project Area, the systems and the water/utility lines servicing them within the Project Area will be decommissioned and left in place. If wells are located within the solar array area, they will either be marked with flagging and a five-foot buffer around them will be fenced to protect these structures, or fully decommissioned. If PCR Investments identifies a need for wells during operations, these wells may be uncapped or new wells may be installed. Any new wells will be permitted in accordance with Johnson County and/or IDNR standards.



Vegetative Management Plan

5.0 VEGETATIVE MANAGEMENT PLAN

PCR Investments is committed to minimizing impacts to soil within the Project Area so that the site may be returned to active agricultural production upon decommissioning. In accordance with the VMP, PCR Investments will establish a permanent vegetative cover throughout the Project Area including areas beneath and around arrays. This will manage erosion by increasing stormwater infiltration and reducing runoff. Stormwater infiltrates soil at a higher rate on perennially vegetated ground cover than on cultivated cropland. The transition to permanent perennial vegetation will manage additional runoff resulting from the solar modules and access roads. Permanent perennial vegetative cover also provides connectivity to existing adjacent wildlife habitats.



Controling Spread of Undesireabale Species

6.0 CONTROLING SPREAD OF UNDESIREABALE SPECIES

During construction and operation, appropriate BMPs will be used to manage and limit the spread of invasive and noxious weed species. Invasive and noxious weed control practices to be conducted during pre-construction, construction and operation of the project, soil handling, and equipment cleaning are described in the VMP.

Equipment will be cleaned before mobilization to the site to prevent introduction of invasive species from off-site sources. The equipment will be manually cleaned of plant materials between work zones within the Project Site. Project Plan details can be found in the Vegetation Management Plan developed for the Project.



Sensitive Areas Plan

7.0 SENSITIVE AREAS PLAN

PCR Investments conducted an analysis for sensitive areas within the Project Area as required by Johnson County. This analysis included review for critical wildlife habitat, floodplain and floodway, historic properties, prairie and prairie remnants, savanna and savanna remnants, significant slopes, stream corridors, watercourses, surface water bodies, wetlands, and woodlands. No sensitive area features were identified with the exceptions of a Class 3 wetland and an unnamed tributary. This unnamed tributary is considered a stream corridor, which is the technical term for the identified sensitive area per the Johnson County Sensitive Areas Ordinance.

The wetland totaled approximately 0.43 acre, and based on the Johnson County wetland classification system, this wetland would be classified as a Class 3 wetland and would require a 50-foot buffer. Wetland exhibits and wetland determination forms are included in the Sensitive Areas Analysis Report prepared for the Project (provided under separate cover).

The unnamed tributary is an intermittent stream, running in a northwest to southeast orientation, transecting the southwest corner of the site. No Federal Emergency Management Agency (FEMA) Flood Insurance Risk Map (FIRM) floodway is associated with the tributary. Based on the classification of the stream, a 30-foot natural buffer has been established around the stream corridor.

At this time, no impacts to the identified sensitive areas are proposed or authorized. The sensitive areas, sensitive area buffers and area of disturbance are shown on the Site Plan provided in Appendix A. PCR Investments will implement best management practices to prevent soil erosion and sedimentation from impacting sensitive areas by adhering to the site-specific Erosion Control Plan required under the NPDES permitting administered by the IDNR and under the Johnson County UDO.



Decommissioning

8.0 DECOMMISSIONING

At the end of the Project's useful life, anticipated to be 30 to 35 years, PCR Investments will either take necessary steps to continue operation of the Project (such as re-permitting and retrofitting) with an opportunity for a project lifetime of 50 years or more, or will decommission the Project and remove facilities. PCR Investments reserves the right to extend operations instead of decommissioning at the end of the site permit term. Refer to the Project's Decommissioning Plan for additional details.

In general, most of the decommissioned equipment and materials will be recycled or sold on the secondary market. Any materials that cannot be recycled will be disposed of at approved facilities. PCR Investments anticipates contracting with the panel manufacturer to accept panels for recycling at their end of life and/or contract recycling services. At or before the end of solar project's operations, PCR Investments will notify Johnson County of its intent to decommission the project. In general, site decommissioning and equipment removal can take 6 to 12 months. Therefore, access roads, fencing, and electrical power facilities will remain in place for use by

the decommissioning and restoration workers until no longer needed. Demolition debris will be placed in temporary on-site storage area(s) pending final transportation and disposal/recycling.

8.1 RESTORATION/RECLAMATION OF FACILITY SITE

Once the solar facilities are removed, the site would be restored to agricultural use or to another use if the economic conditions and landowner intentions at that time indicate another use is appropriate for the site. Restoration activities will be conducted in accordance with the Decommissioning Plan and VMP.

After steel pier foundations, fence posts, concrete foundations, re-claimed access road corridors and other equipment are removed the site will be returned to original the original topography to the extent practicable and will be restored with either stockpiled soil or by supplemental soil. Soils will be decompacted if necessary. The method of decompaction will depend on how compacted the soil has become. Soils will be de-compacted by using a tractor and disc to a 12-inch depth or a tractor and a deep subsoiler, if necessary. Grading and other soil disturbance activities conducted during decommissioning will be minimized to the extent necessary to effectively decommission the site and to maintain the soil benefits realized during the long-term operation of the Project.



APPENDIX A



AGRICULTURAL IMPACT MITIGATION PLAN

Appendix A

Appendix A

- A.1 SITE LOCATION MAP
- A.2 USDA NRCS SOIL SURVEY REPORT
- A.3 GRADING PLAN
- A.4 SITE PLAN





NRCS

Natural Resources Conservation Service A product of the National Cooperative Soil Survey, a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local participants

Custom Soil Resource Report for Johnson County, Iowa

Lone Tree Substation



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (https://offices.sc.egov.usda.gov/locator/app?agency=nrcs) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2 053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface	2
How Soil Surveys Are Made	
Soil Map	
Soil Map	
Legend	10
Map Unit Legend	
Map Unit Descriptions	11
Johnson County, Iowa	
119—Muscatine silt loam, 0 to 2 percent slopes	13
121B—Tama silt loam, 2 to 5 percent slopes	14
122—Sperry silt loam, depressional, 0 to 1 percent slopes	
160—Walford silt loam, 0 to 2 percent slopes	
175B—Dickinson fine sandy loam, 2 to 5 percent slopes	18
291—Atterberry silt loam, 1 to 3 percent slopes	19
M162B—Downs silt loam, till plain, 2 to 5 percent slopes	
M162C—Downs silt loam, till plain, 5 to 9 percent slopes	
M162C2—Downs silt loam, till plain, 5 to 9 percent slopes, eroded	23

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.



MAP LEGEND

Area of Interest (AOI)

Area of Interest (AOI)

Soils

Soil Map Unit Polygons

-

Soil Map Unit Lines

Soil Map Unit Points

Special Point Features

(0)

Blowout

 \boxtimes

Borrow Pit

Ж

Clay Spot

^

Closed Depression

losed Depressio

3

Gravel Pit

...

Gravelly Spot

0

Landfill

٨.

Lava Flow

Marsh or swamp

@

Mine or Quarry

X.

Miscellaneous Water

0

Perennial Water
Rock Outcrop

4

Saline Spot

. .

Sandy Spot

. .

Severely Eroded Spot

_

Sinkhole

20.

Slide or Slip

Ø

Sodic Spot

LOLIND

8

Spoil Area



Stony Spot

0

Very Stony Spot

87

Wet Spot Other

Δ

Special Line Features

Water Features

_

Streams and Canals

Transportation

ransp

Rails

~

Interstate Highways

__

US Routes

~

Major Roads

0

Local Roads

Background

100

Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:15.800.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Johnson County, Iowa Survey Area Data: Version 25, Sep 2, 2022

Soil map units are labeled (as space allows) for map scales 1:50.000 or larger.

Date(s) aerial images were photographed: Data not available.

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
119	Muscatine silt loam, 0 to 2 percent slopes	0.0	0.0%
121B	Tama silt loam, 2 to 5 percent slopes	8.0	15.7%
122	Sperry silt loam, depressional, 0 to 1 percent slopes		38.0%
160	Walford silt loam, 0 to 2 percent slopes	6.5	12.7%
175B	Dickinson fine sandy loam, 2 to 5 percent slopes	0.9	1.8%
291	Atterberry silt loam, 1 to 3 percent slopes		23.5%
M162B	Downs silt loam, till plain, 2 to 5 percent slopes	4.1	8.1%
M162C	Downs silt loam, till plain, 5 to 9 percent slopes	0.0	
M162C2	Downs silt loam, till plain, 5 to 9 percent slopes, eroded	0.0	0.1%
Totals for Area of Interest		50.8	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They

generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Johnson County, Iowa

119—Muscatine silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2wm7t

Elevation: 630 to 860 feet

Mean annual precipitation: 35 to 37 inches Mean annual air temperature: 48 to 51 degrees F

Frost-free period: 160 to 170 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Muscatine and similar soils: 95 percent

Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Muscatine

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluve, crest

Down-slope shape: Linear Across-slope shape: Linear Parent material: Fine-silty loess

Typical profile

Ap - 0 to 7 inches: silt loam
A - 7 to 16 inches: silty clay loam
AB - 16 to 20 inches: silty clay loam
Btg - 20 to 42 inches: silty clay loam
BCg - 42 to 79 inches: silt loam

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches Drainage class: Somewhat poorly drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: About 12 to 42 inches

Frequency of flooding: None Frequency of ponding: None

Calcium carbonate, maximum content: 15 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 11.5 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 1

Hydrologic Soil Group: C/D

Ecological site: R108XC516IA - Wet Loess Upland Flat Prairie

Hydric soil rating: No

Minor Components

Garwin

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Concave Across-slope shape: Linear

Ecological site: R108XC516IA - Wet Loess Upland Flat Prairie

Hydric soil rating: Yes

121B—Tama silt loam, 2 to 5 percent slopes

Map Unit Setting

National map unit symbol: 2thlz Elevation: 560 to 1.210 feet

Mean annual precipitation: 35 to 39 inches Mean annual air temperature: 49 to 53 degrees F

Frost-free period: 174 to 205 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Tama and similar soils: 95 percent Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Tama

Setting

Landform: Interfluves

Landform position (two-dimensional): Shoulder, summit, backslope

Landform position (three-dimensional): Interfluve, side slope

Down-slope shape: Convex Across-slope shape: Linear Parent material: Fine-silty loess

Typical profile

Ap - 0 to 6 inches: silt loam
A1 - 6 to 10 inches: silty clay loam
A2 - 10 to 14 inches: silty clay loam
BA - 14 to 18 inches: silty clay loam
Bt1 - 18 to 32 inches: silty clay loam
Bt2 - 32 to 45 inches: silty clay loam

BC - 45 to 60 inches: silty clay loam

Properties and qualities

Slope: 2 to 5 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 11.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e

Hydrologic Soil Group: C

Ecological site: R108XC503IA - Loess Upland Prairie

Hydric soil rating: No

Minor Components

Muscatine

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Shoulder, summit Landform position (three-dimensional): Interfluve, side slope

Down-slope shape: Convex Across-slope shape: Linear

Ecological site: R108XC516IA - Wet Loess Upland Flat Prairie

Hydric soil rating: No

122—Sperry silt loam, depressional, 0 to 1 percent slopes

Map Unit Setting

National map unit symbol: 2vw4c Elevation: 610 to 1,120 feet

Mean annual precipitation: 34 to 38 inches
Mean annual air temperature: 47 to 52 degrees F

Frost-free period: 153 to 179 days

Farmland classification: Prime farmland if drained

Map Unit Composition

Sperry, depressional, and similar soils: 95 percent

Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Sperry, Depressional

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve Microfeatures of landform position: Closed depressions

Down-slope shape: Concave Across-slope shape: Concave

Parent material: Loess

Typical profile

Ap - 0 to 10 inches: silt loam E - 10 to 17 inches: silt loam

Btg1 - 17 to 28 inches: silty clay loam
Btg2 - 28 to 36 inches: silty clay
Btg3 - 36 to 47 inches: silty clay
Btg4 - 47 to 63 inches: silty clay loam
BCtg - 63 to 79 inches: silty clay loam

Properties and qualities

Slope: 0 to 1 percent

Depth to restrictive feature: 14 to 24 inches to abrupt textural change

Drainage class: Very poorly drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately

low (0.00 to 0.01 in/hr)

Depth to water table: About 0 inches

Frequency of flooding: None Frequency of ponding: Frequent

Calcium carbonate, maximum content: 5 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: Low (about 3.2 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3w

Hydrologic Soil Group: D

Ecological site: R108XC515IA - Ponded Upland Depression Sedge Meadow

Hydric soil rating: Yes

Minor Components

Taintor

Percent of map unit: 3 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear Across-slope shape: Linear

Ecological site: R108XC516IA - Wet Loess Upland Flat Prairie

Hydric soil rating: Yes

Garwin

Percent of map unit: 2 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Concave Across-slope shape: Linear

Ecological site: R108XC516IA - Wet Loess Upland Flat Prairie

Hydric soil rating: Yes

160—Walford silt loam, 0 to 2 percent slopes

Map Unit Setting

National map unit symbol: 2yvk1 Elevation: 520 to 1,310 feet

Mean annual precipitation: 23 to 41 inches Mean annual air temperature: 43 to 54 degrees F

Frost-free period: 155 to 210 days

Farmland classification: Prime farmland if drained

Map Unit Composition

Walford and similar soils: 95 percent Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Walford

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Concave Across-slope shape: Linear Parent material: Fine-silty loess

Typical profile

Ap - 0 to 8 inches: silt loam E - 8 to 22 inches: silt loam

Btg - 22 to 50 inches: silty clay loam
BCg - 50 to 63 inches: silty clay loam

Cg - 63 to 79 inches: silt loam

Properties and qualities

Slope: 0 to 2 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Poorly drained

Runoff class: Very low

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: About 0 to 12 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 11.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2w

Hydrologic Soil Group: C/D

Ecological site: R108XC517IA - Wet Loess Upland Flat Savanna

Hydric soil rating: Yes

Minor Components

Sperry, depressional

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve Microfeatures of landform position: Closed depressions

Down-slope shape: Concave Across-slope shape: Concave

Ecological site: R108XC515IA - Ponded Upland Depression Sedge Meadow

Hydric soil rating: Yes

175B—Dickinson fine sandy loam, 2 to 5 percent slopes

Map Unit Setting

National map unit symbol: 2vw4z Elevation: 550 to 1,390 feet

Mean annual precipitation: 34 to 39 inches Mean annual air temperature: 44 to 51 degrees F

Frost-free period: 145 to 180 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Dickinson and similar soils: 95 percent

Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Dickinson

Setting

Landform: Stream terraces, dunes

Landform position (two-dimensional): Backslope, summit, shoulder

Landform position (three-dimensional): Interfluve, tread

Down-slope shape: Convex

Across-slope shape: Linear, convex Parent material: Sandy eolian deposits

Typical profile

Ap - 0 to 9 inches: fine sandy loam
A - 9 to 18 inches: fine sandy loam
Bw - 18 to 30 inches: fine sandy loam
BC - 30 to 36 inches: loamy sand

C - 36 to 79 inches: sand

Properties and qualities

Slope: 2 to 5 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Very low

Capacity of the most limiting layer to transmit water (Ksat): Moderately high to very

high (1.42 to 14.17 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: Low (about 5.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: A

Ecological site: R108XC506IA - Sandy Upland Prairie

Hydric soil rating: No

Minor Components

Sparta

Percent of map unit: 5 percent Landform: Stream terraces, dunes

Landform position (two-dimensional): Summit

Landform position (three-dimensional): Interfluve, tread

Down-slope shape: Convex

Across-slope shape: Linear, convex

Ecological site: R108XC506IA - Sandy Upland Prairie

Hydric soil rating: No

291—Atterberry silt loam, 1 to 3 percent slopes

Map Unit Setting

National map unit symbol: 2yvk2 Elevation: 520 to 1,310 feet

Mean annual precipitation: 23 to 41 inches Mean annual air temperature: 43 to 54 degrees F

Frost-free period: 155 to 210 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Atterberry and similar soils: 95 percent

Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Atterberry

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear

Across-slope shape: Linear Parent material: Fine-silty loess

Typical profile

Ap - 0 to 8 inches: silt loam
E - 8 to 14 inches: silt loam
BE - 14 to 17 inches: silt loam
Bt - 17 to 24 inches: silty clay loam
Btg - 24 to 48 inches: silty clay loam
BCg - 48 to 55 inches: silty clay loam
Cg - 55 to 79 inches: silt loam

Properties and qualities

Slope: 1 to 3 percent

Depth to restrictive feature: More than 80 inches Drainage class: Somewhat poorly drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: About 12 to 42 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 11.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 1

Hydrologic Soil Group: C/D

Ecological site: R108XC517IA - Wet Loess Upland Flat Savanna

Hydric soil rating: No

Minor Components

Walford

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Concave Across-slope shape: Linear

Ecological site: R108XC517IA - Wet Loess Upland Flat Savanna

Hydric soil rating: Yes

M162B—Downs silt loam, till plain, 2 to 5 percent slopes

Map Unit Setting

National map unit symbol: 2tgr8 Elevation: 580 to 1.230 feet

Mean annual precipitation: 35 to 39 inches
Mean annual air temperature: 48 to 51 degrees F

Frost-free period: 170 to 205 days

Farmland classification: All areas are prime farmland

Map Unit Composition

Downs and similar soils: 90 percent *Minor components*: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Downs

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit, shoulder Landform position (three-dimensional): Interfluve

Down-slope shape: Convex Across-slope shape: Convex Parent material: Fine-silty loess

Typical profile

Ap - 0 to 8 inches: silt loam
E - 8 to 12 inches: silt loam
BE - 12 to 17 inches: silt loam
Bt1 - 17 to 24 inches: silty clay loam
Bt2 - 24 to 33 inches: silty clay loam
Bt3 - 33 to 39 inches: silty clay loam
BC1 - 39 to 48 inches: silt loam
BC2 - 48 to 79 inches: silt loam

Properties and qualities

Slope: 2 to 5 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Runoff class: Low

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 10.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e

Hydrologic Soil Group: C

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

Minor Components

Greenbush

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear Across-slope shape: Convex

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

Atterberry

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear Across-slope shape: Linear

Ecological site: R108XC517IA - Wet Loess Upland Flat Savanna

Hydric soil rating: No

M162C—Downs silt loam, till plain, 5 to 9 percent slopes

Map Unit Setting

National map unit symbol: 2tgrb Elevation: 600 to 1.060 feet

Mean annual precipitation: 35 to 38 inches Mean annual air temperature: 48 to 51 degrees F

Frost-free period: 170 to 205 days

Farmland classification: Farmland of statewide importance

Map Unit Composition

Downs and similar soils: 90 percent *Minor components:* 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Downs

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit, shoulder Landform position (three-dimensional): Interfluve

Down-slope shape: Convex Across-slope shape: Convex Parent material: Fine-silty loess

Typical profile

Ap - 0 to 8 inches: silt loam
E - 8 to 12 inches: silt loam
BE - 12 to 17 inches: silt loam
Bt1 - 17 to 24 inches: silty clay loam
Bt2 - 24 to 33 inches: silty clay loam
Bt3 - 33 to 39 inches: silty clay loam
BC1 - 39 to 48 inches: silt loam
BC2 - 48 to 79 inches: silt loam

Properties and qualities

Slope: 5 to 9 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 10.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: C

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

Minor Components

Downs, eroded

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit, shoulder Landform position (three-dimensional): Interfluve

Down-slope shape: Convex Across-slope shape: Convex

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

Greenbush

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear Across-slope shape: Convex

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

M162C2—Downs silt loam, till plain, 5 to 9 percent slopes, eroded

Map Unit Setting

National map unit symbol: 2tgrc Elevation: 570 to 1,200 feet

Mean annual precipitation: 35 to 38 inches Mean annual air temperature: 48 to 51 degrees F

Frost-free period: 170 to 205 days

Farmland classification: Farmland of statewide importance

Map Unit Composition

Downs, eroded, and similar soils: 95 percent

Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Downs, Eroded

Setting

Landform: Interfluves

Landform position (two-dimensional): Summit, shoulder

Landform position (three-dimensional): Interfluve

Down-slope shape: Convex Across-slope shape: Convex Parent material: Fine-silty loess

Typical profile

Ap - 0 to 6 inches: silt loam BE - 6 to 12 inches: silt loam

Bt1 - 12 to 24 inches: silty clay loam Bt2 - 24 to 33 inches: silty clay loam Bt3 - 33 to 39 inches: silty clay loam BC1 - 39 to 48 inches: silt loam BC2 - 48 to 79 inches: silt loam

Properties and qualities

Slope: 5 to 9 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained Runoff class: Medium

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.14 to 1.42 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None Frequency of ponding: None

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water supply, 0 to 60 inches: High (about 10.6 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: C

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No

Minor Components

Greenbush, eroded

Percent of map unit: 5 percent

Landform: Interfluves

Landform position (two-dimensional): Summit Landform position (three-dimensional): Interfluve

Down-slope shape: Linear Across-slope shape: Convex

Ecological site: R108XC504IA - Loess Upland Savanna

Hydric soil rating: No


GRADING NOTES:


- 1. THE PROPOSED IMPROVEMENTS SHALL BE CONSTRUCTED ACCORDING TO JOHNSON COUNTY, IOWA SPECIFICATIONS, AND SHALL MEET ALL APPLICABLE LOCAL, STATE, AND FEDERAL LAWS AND REQUIREMENTS.
- 2. THE CONTRACTOR SHALL MAINTAIN SITE DRAINAGE THROUGHOUT CONSTRUCTION. THIS MAY INCLUDE THE EXCAVATION OF TEMPORARY DITCHES OR PUMPING TO ALLEVIATE WATER PONDING.
- 3. SILT FENCE AND OTHER EROSION CONTROL FACILITIES MUST BE INSTALLED PRIOR TO CONSTRUCTION OR ANY OTHER LAND DISTURBING ACTIVITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ALL EROSION CONTROL FACILITIES ONCE THE THREAT OF EROSION HAS PASSED WITH THE APPROVAL OF THE GOVERNING AGENCY.
- THE GOVERNING AGENCY.

 4. THE CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR THE COMPUTATIONS OF ALL GRADING AND FOR ACTUAL LAND BALANCE, INCLUDING UTILITY TRENCH SPOIL. THE CONTRACTOR SHALL IMPORT OR EXPORT MATERIAL AS NECESSARY TO COMPLETE THE PROJECT.
- 5. GRADING SHALL CONSIST OF CLEARING AND GRUBBING EXISTING VEGETATION, STRIPPING TOPSOIL, , IMPORTING OR EXPORTING MATERIAL TO ACHIEVE AN ON-SITE EARTHWORK BALANCE, GRADING THE PROPOSED EQUIPMENT PADS AND PAVEMENT AREAS, SCARIFYING AND FINAL COMPACTION OF THE PAVEMENT SUBGRADE, AND PLACEMENT OF TOPSOIL.
- 6. NO FILL SHALL BE PLACED ON A WET OR SOFT SUBGRADE. THE SUBGRADE SHALL BE PROOF-ROLLED AND INSPECTED BY THE ENGINEER BEFORE ANY MATERIAL IS
- 7. ALL FILL SHALL BE CONSIDERED STRUCTURAL FILL AND SHALL BE PLACED ACCORDINGLY.


NOT

NO CHANGE TO THE EXISTING GRADE IS PROPOSED FOR THIS SITE. MINOR ADJUSTMENTS TO GRADE MAY BE REQUIRED DURING CONSTRUCION TO ACCOMODATE PROPOSED IMPROVEMENTS. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY OF ANY NECESSARY CHANGES TO GRADE GREATER THAN 6-INCHES.

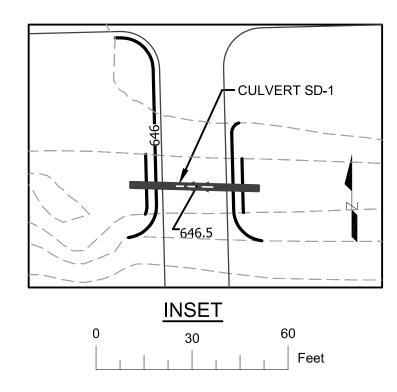



CULVERT SD-1 H:1"=30' V:1"=10'

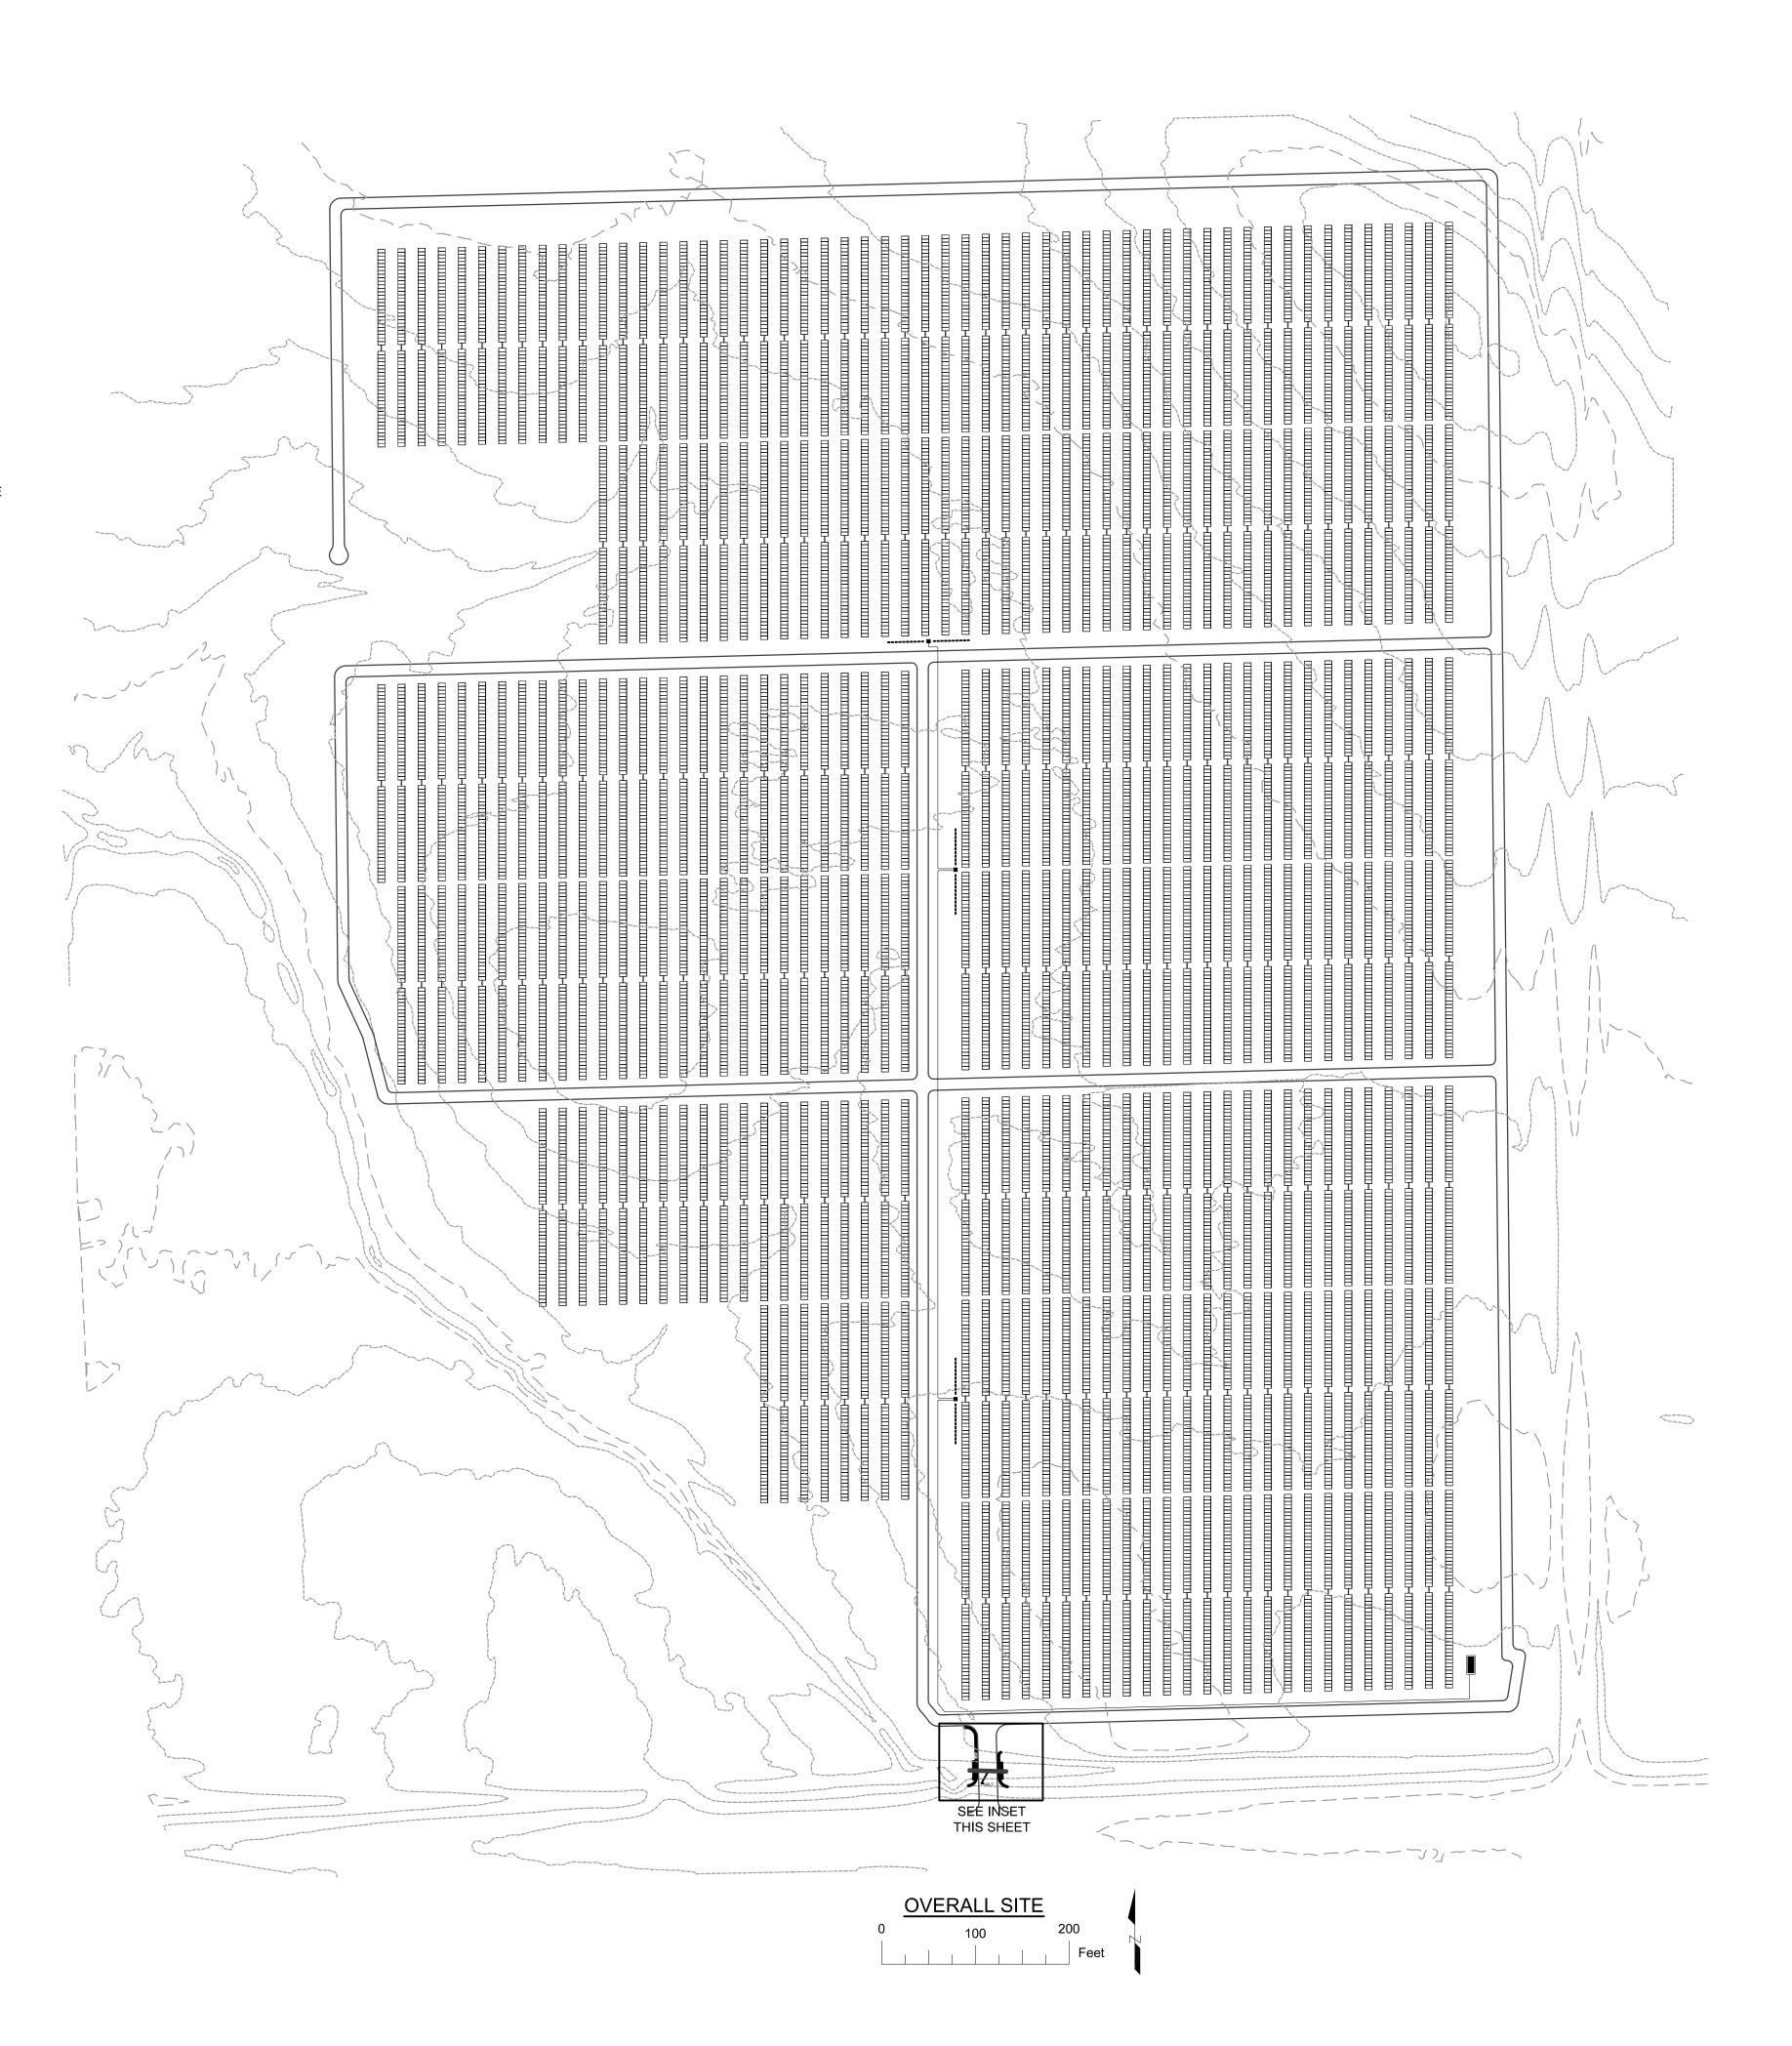

SHEET ISSUE:
9/29/23
REVISIONS:

Stante C. II AURORA AVE.

JITE 1327
3
JCHNER
(832) 955-1979
DES MC

1334 BRITTMOORE RD., SUITE HOUSTON, TX 77043
CONTACT: CYNTHIA SCHUCHI

TREE PROJECT

JOB NUMBER:

SHEET


NOT FOR CONSTRUCTION

LONE TREE PROJECT

Lone Tree, IOWA

SITE PLAN

Lone Tree Solar Project					
MW ac	MW dc	ratio	MWh/y	Capacity factor [%]	Acres
7,50	8,97	1,20	15338	23.35	50

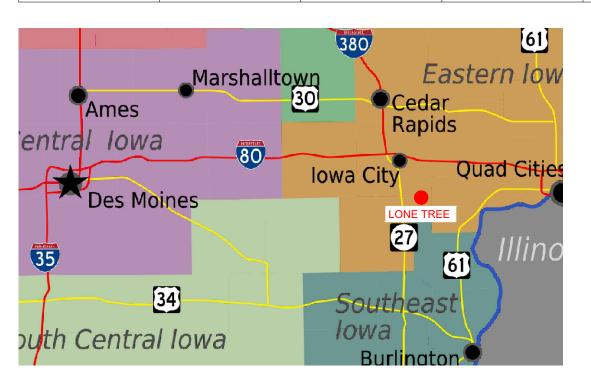





Contact Information				
Mariano Brandi	CEO	mbrandi@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en	
Cynthia Schuchner	Chief Construction and Engineering Officer	cschuchner@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en	


04							
03							
02							
01							
00	10	0/17/23	Preliminary				
Rev.	Date	(MM/DD/YY)		COMMENTS			
	REVISIONS						
					₽ PCR	2	
Proje	ect:	LONE TRE	E				
Sect	or:	JOHNSON	I, IOWA, USA				
Own	er:	PCR INVE	STMENTS SP2 LLC				
Title		SITE PLA	N		Sheet	01_08	
Utilit	y:	CIPCO			Scale	Rev:	
File:	Site Plan Lone Tree v11.dwg						
			∢				




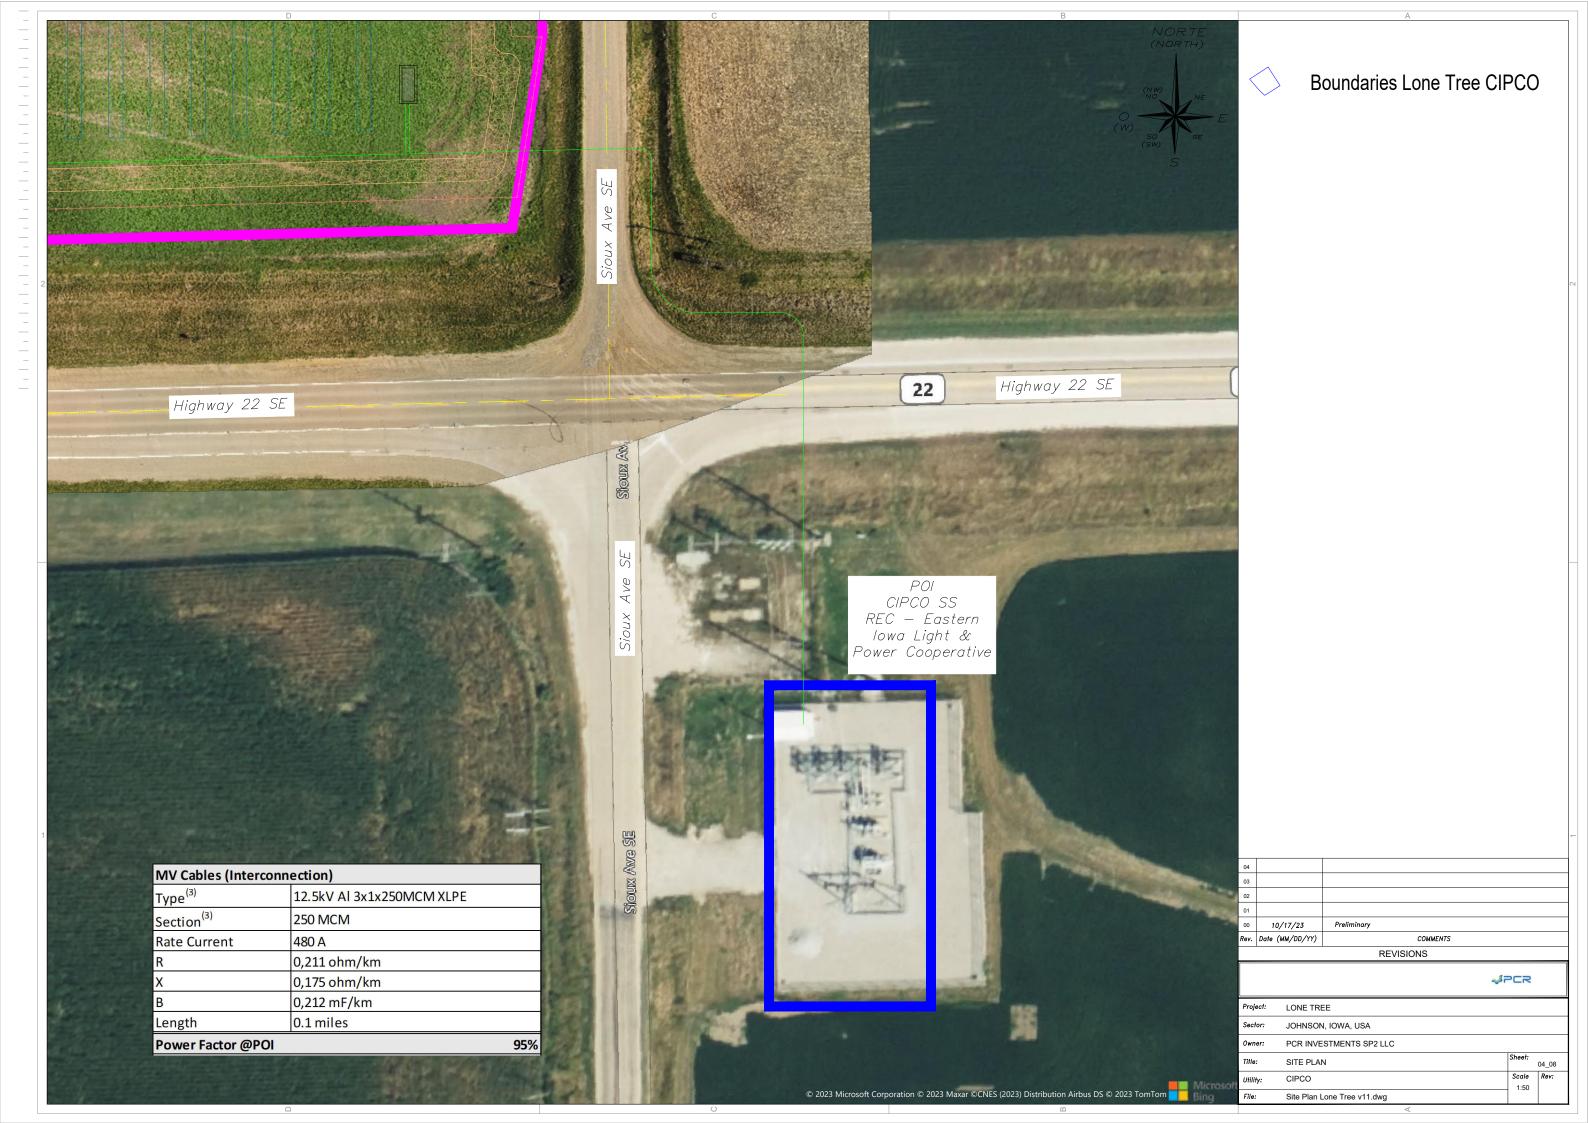

NORTE (NORTH) Angle min., * Angle max., ° Distribution, % Color 0.00 0.00 10.25 0.00 1.75 84.28 1.75 3.50 4.13 3.50 5.25 0.90 5.25 7.00 0.26 7.00 8.75 0.11 8.75 10.50 0.06 10.50 12.25 0.02 12.25 14.00 0.00 14.00 55.00 0.00 10/17/23 Rev. Date (MM/DD/YY) COMMENTS REVISIONS **₩**PCR Project: LONE TREE JOHNSON, IOWA, USA PCR INVESTMENTS SP2 LLC Sheet: ____05_08 SITE PLAN Scale Rev: 1" = 200' CIPCO Site Plan Lone Tree v11.dwg

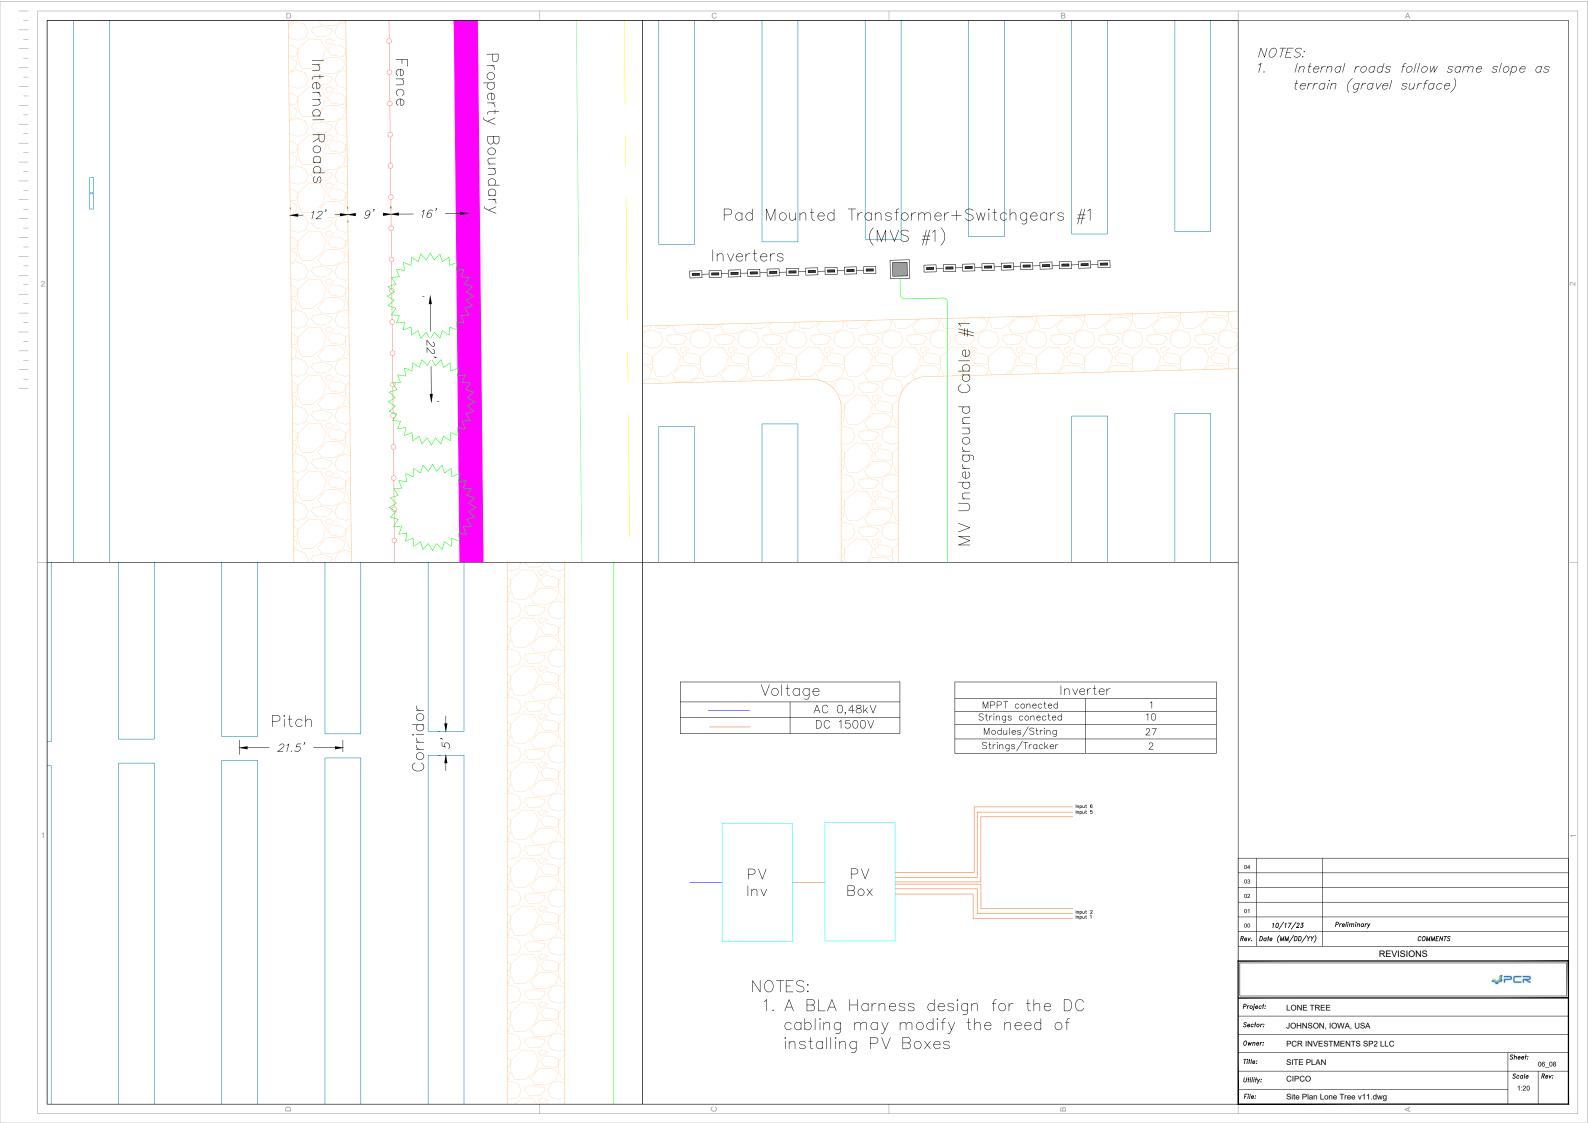

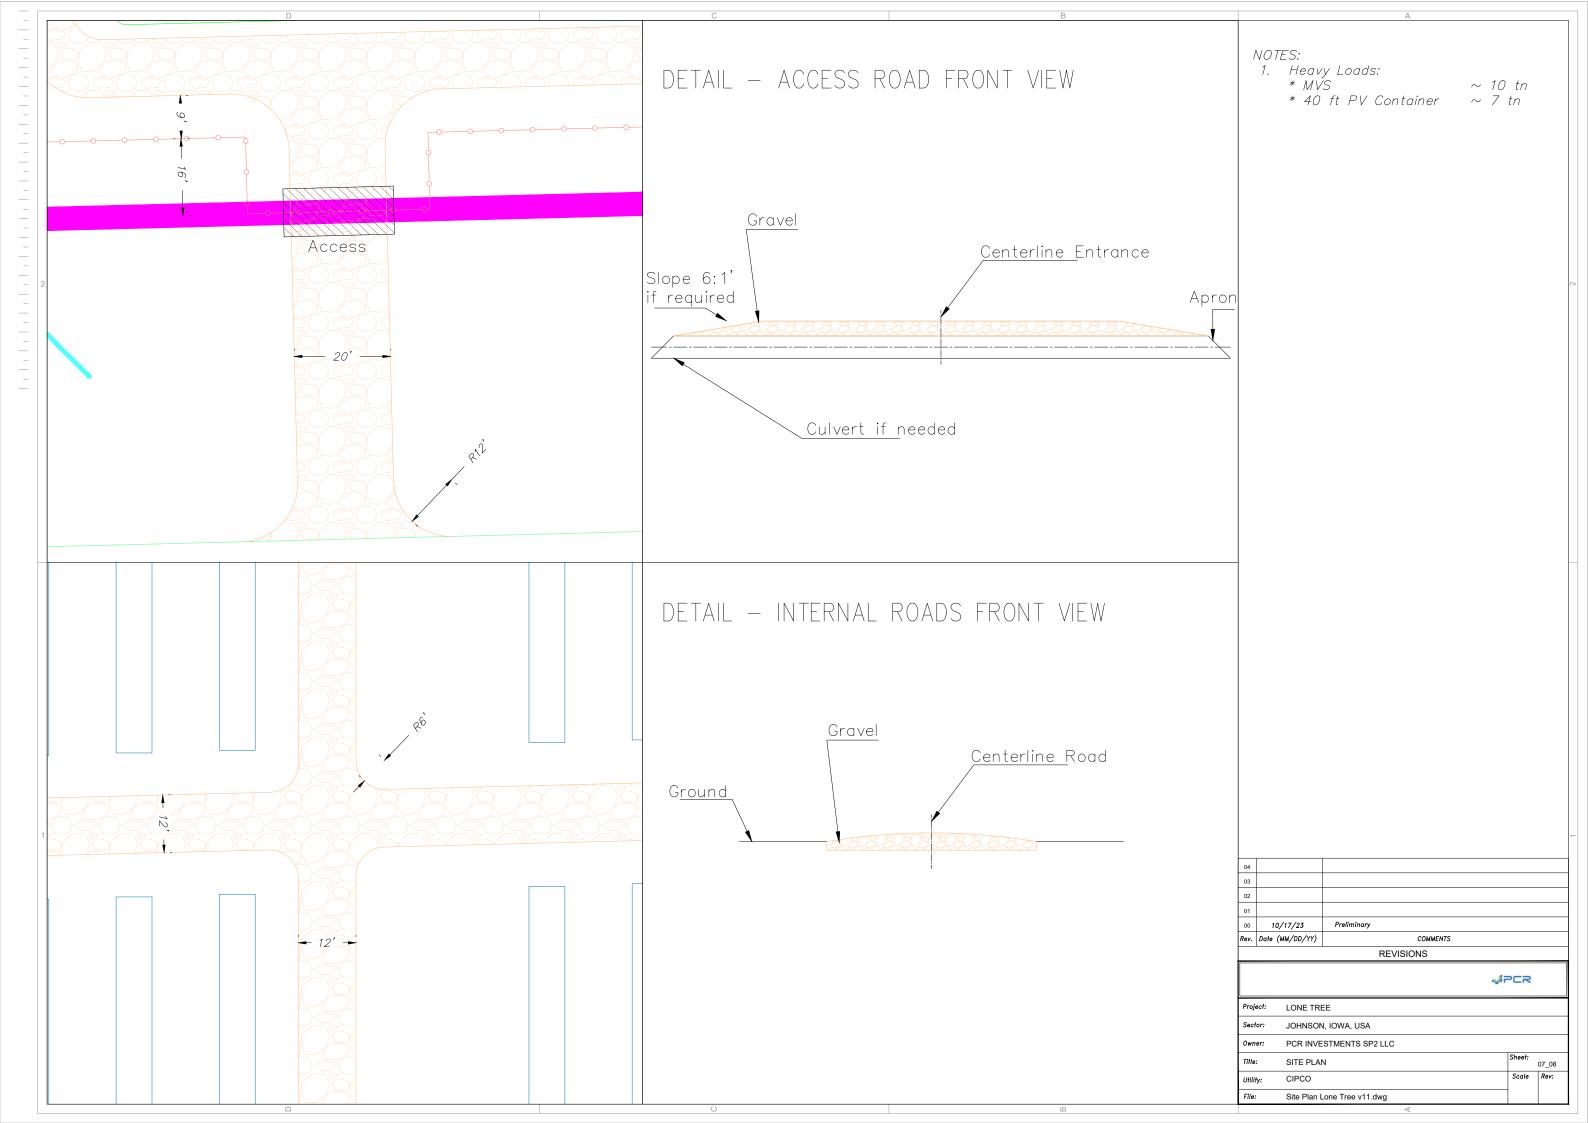

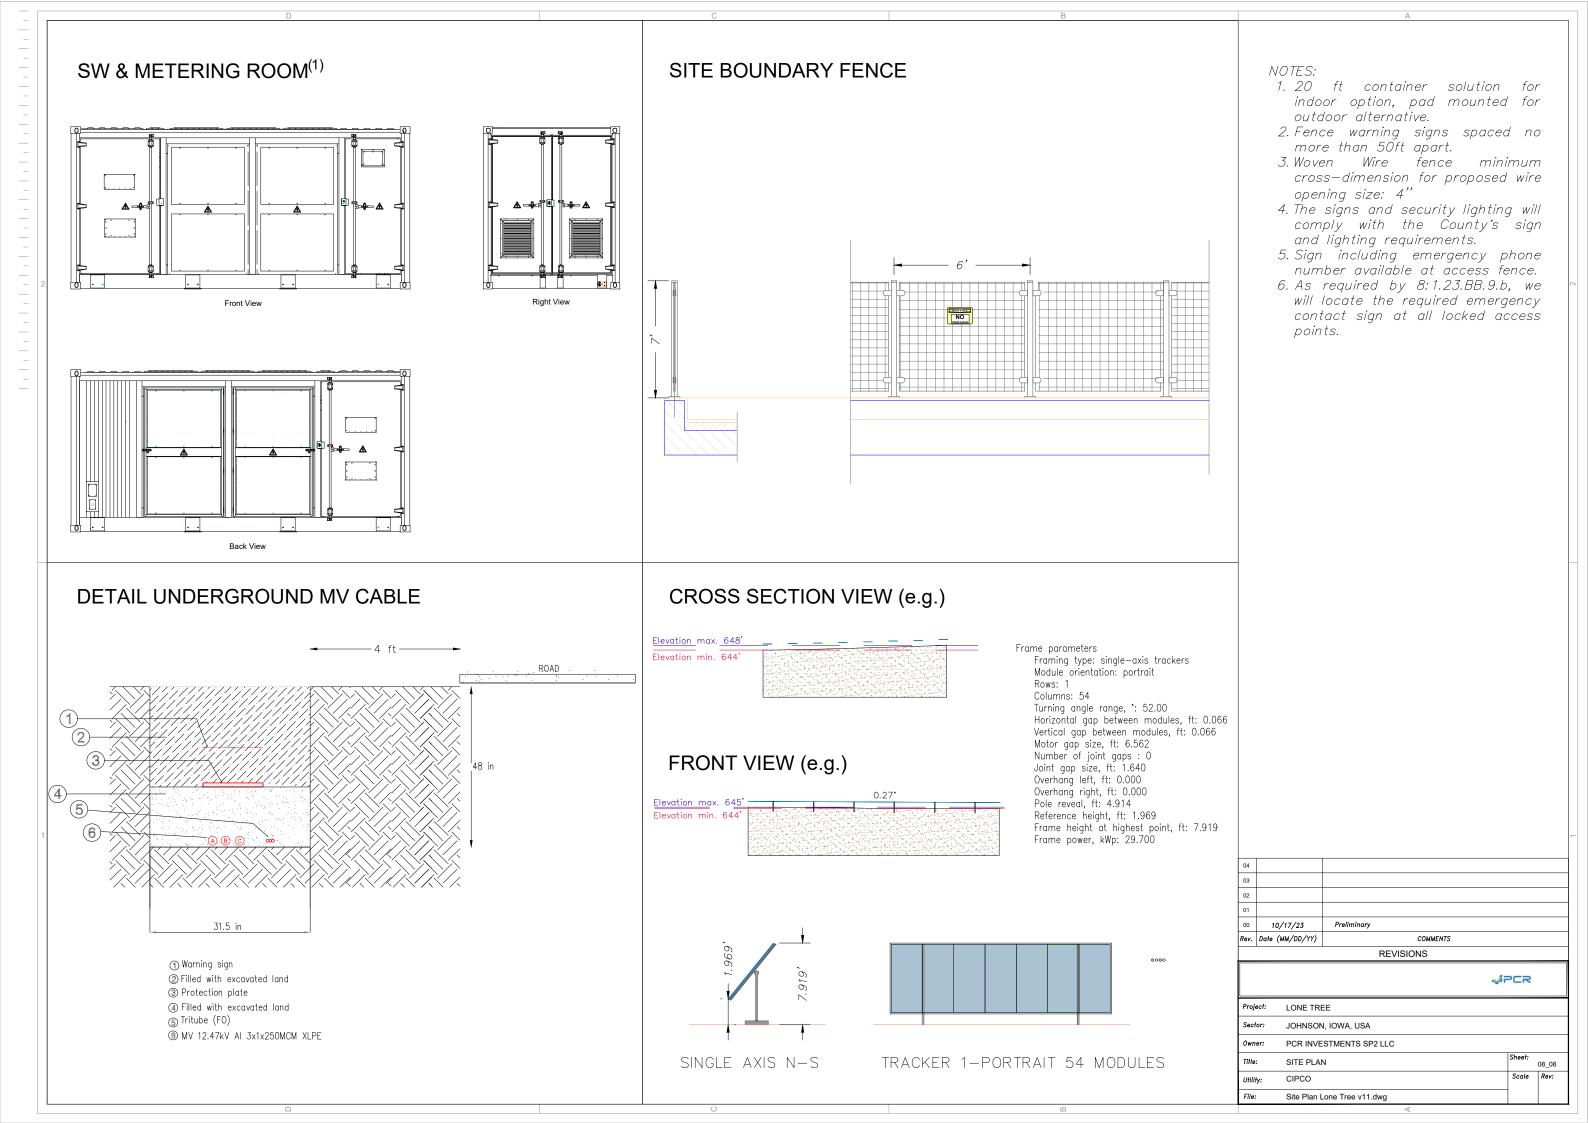





Attachment F: Glare Hazard Analysis



Glare Hazard Analysis

PCR Lone Tree Johnson County, Iowa

August 2, 2022

Prepared for:

PCR Investments SP 2 LLC 1334 Brittmoore Road, Suite 1327 Houston, TX 77043

Prepared by:

Stantec Consulting Services Inc. 2300 Swan Lake Boulevard, Suite 202 Independence, IA 50644



Stantec Consulting Services Inc. (Stantec) utilized the web-based ForgeSolar glare hazard analysis program to complete a glare analysis for the Lone Tree Solar Project in Johnson County (see report herein). The objective of this analysis was to determine the potential effect of glint and/or glare (glare) from the photovoltaic (PV) solar panels on pilots and airport operations, residents in the area, and drivers in the vicinity of the Project Area.

ForgeSolar is the industry standard for glare analysis in the U.S. and is based on and licensed by the Sandia National Laboratory Solar Glare Hazard Analysis Tool (SGHAT). The Technical Reference Manual for the SGHAT was published in March 2015. ForgeSolar is the only entity listed by Sandia National Laboratory as having a license to use the software. Stantec has performed glare analyses for over 100 solar projects using the ForgeSolar program.

Based on the project layout and operational parameters provided to Stantec by PCR Energy for the glare hazard analysis herein, and given the results of the analysis, it is Stantec's understanding that the Lone Tree Solar Project is in compliance with Johnson County requirements for glare minimization (8:1.23.BB.7).

Prepared by:

Signature

Jennifer Brunty, Senior Environmental Scientist

Printed Name



Table of Contents

EXE(CUTIVE SUMMARY	II
ABB	REVIATIONS	III
GLO	SSARY	IV
1.0	INTRODUCTION	1.1
2.0	DATA INPUT SUMMARY	2.6
2.1	SOLAR ARRAY	2.6
2.2	AIRPORT APPROACH PATHS AND AIR TRAFFIC CONTROL TOWER	2.7
2.3	ROADWAYS AND PROPERTIES LOCATED ADJACENT TO THE SOLAR	
	ARRAYS	2.7
3.0	GLARE ANALYSES RESULTS	3.1
3.1	AIRPORT APPROACH PATHS	
3.2	AIR TRAFFIC CONTROL TOWERS	
3.3	ROADWAYS AND PROPERTIES LOCATED ADJACENT TO THE SOLAR	
	ARRAYS	3.1
4.0	CONCLUSIONS	4.1

LIST OF TABLES

Table 1 – Solar Panel Parameters Used for Glare Analysis

LIST OF FIGURES

Figure 1 – PCR Lone Tree Solar Project Location Map

Figure 2 – Reflectivity Differences Between Low and High Incidence Angles

Figure 3 – Airport Within Vicinity of the PCR Lone Tree Solar Project

Figure 4 – Analysis Area, Structures, and Roadways

LIST OF APPENDICES

Appendix A – ForgeSolar Reports



i

PCR LONE TREE SOLAR PROJECT GLARE HAZARD ANALYSIS

Executive Summary

Stantec Consulting Services, Inc. (Stantec) utilized the web-based ForgeSolar glare hazard analysis program to analyze the potential for glare from the proposed PCR Lone Tree solar project (Project), a 7.5-megawatt (MW), utility-scale, solar-powered electric generating facility located in Johnson County, Iowa (Figure 1). The Project will include photovoltaic (PV) solar panels mounted on a racking system to maximize solar energy capture and electric generation of the array. The Project area will encompass approximately 50 acres in an agricultural area located approximately 2.5 miles northwest of the community of Lone Tree in central Iowa. The ForgeSolar program identifies the three following types of glare (no color indicates no glare predicted):

GREEN - Low potential for temporary after-image.
YELLOW - Potential for temporary after-image.
RED - Potential for permanent eye damage.

Based on the solar array parameters provided and the current site design, glare from the Project is not predicted to impact pilots landing at one airport located within a 10-mile radius of the Project, including the lowa City Municipal Airport. The results of the ForgeSolar analysis determined that glare from the Project is not predicted to occur for drivers of vehicles on two road segments adjacent to the Project, including Sioux Avenue Southeast and Route 22.

The analysis was completed at two viewing heights for roadways: five feet for cars and small trucks and nine feet for semi-trucks. Glare is not predicted for 6 structures, primarily residences, that were analyzed within proximity to the Project area. All routes and structures were analyzed using 4.5-foot and 9-foot panel heights. The analysis was conducted using the 'shade-slope' methodology, which simulates backtracking of panels at night to return panels to the resting positions, and during the daytime to account for operational measures used to avoid shading effects, as well as tilt caused by the topography of the land.

**It should be noted that a 'resting angle' of 60 degrees was used for the panels in the analysis. If panels are rotated back to a 0-degree position once they reach their maximum rotation, but before sunset, they will be facing up at sunrise and sunset, which results in a high likelihood of glare (see Figure 2 below). Panels should therefore not be returned to a 0-degree position prior to sunset and should be in place at 60 degrees to the east prior to sunrise.

PCR LONE TREE SOLAR PROJECT GLARE HAZARD ANALYSIS

Abbreviations

AGL	above ground level
deg	degrees (0 is due north, 180 is due south)
DNI	direct normal irradiance
FAA	Federal Aviation Administration
FP	flight path (landing path from threshold to two miles out)
ft	Foot
kW	Kilowatt
kWh	kilowatt hour
m	Meters
mi	Mile
min	Minutes
mrad	Milliradian
MW	Megawatt
MSL	mean sea level
OP	observation point (e.g., control tower, vehicle location)
PV	Photovoltaic
W/m ²	Watts per square meter

PCR LONE TREE SOLAR PROJECT GLARE HAZARD ANALYSIS

Glossary

Eye Focal Length [meter (m)]	Typical distance between the cornea and the retina of the human eye, default is 0.017, though some sources indicate that the typical length is 0.022.
Glide Slope [degrees (deg)]	Angle at which the plane approaches the runway during landing (default is 3 deg from horizontal).
Maximum Tracking Angle (deg)	Rotation limit of panels in either direction. Full rotation is 2×maximum tracking angle. E.g., maximum tracking angle of 60 deg indicates full panel rotation range of 120 deg.
Resting Angle (deg)	Angle modules return to after maximum angle is reached.
Observation Point	A specific location, such as a control tower or vehicle, from which an observer might experience glare.
Ocular Transmission Coefficient	Related to the ability of the eye to transmit light, set by at 0.5 by ForgeSolar.
Offset angle of module (deg)	Additional tilt/elevation angle between the tracking axis and the panel.
Orientation of Tracking Axis (deg)	Azimuthal position of tracking axis measured clockwise from true north. Tracking systems in the northern hemisphere are typically oriented near 180 deg. Tracking systems in the southern hemisphere are typically oriented near 0 deg.
Peak DNI (W/m²)**	This value is set at 1,000 by ForgeSolar and is the amount of solar radiation per unit surface area by a surface perpendicular to the sun's rays in a straight line from the direction of the sun at its current position in the sky.
Pupil Diameter (m)	Typical pupil diameter for observer, default is 0.002 m.
PV Array Axis Tracking	Panel tracking mode, if any. Panel can be set to track along one (single) or two (dual) axis tracking. This parameter affects the positioning of the panels at every time step when the sun is up.
PV Array Panel Material	Surface material of panels, including use of anti-reflective coating (ARC). Options include smooth glass without ARC, smooth glass with ARC, light-textured glass with ARC, light-textured glass.
Rated Power (kilowatts)	Power rating of the solar array - used to estimate the energy output per year of the array (optional).
Slope Error (mrad)	Accounts for beam scatter of sunlight on the array. Default is 8.43 mrads for smooth glass with anti-reflective coating, but the value may be adjusted based on the panel material type.
Subtended Angle of Sun (mrad)	The angle above horizontal at which the viewer observes the sun, default value is 9.3 mrad.
Threshold	The physical beginning of the runway. Aircraft are typically expected to be 50 feet above ground at this point.

PCR LONE TREE SOLAR PROJECT **GLARE HAZARD ANALYSIS**

Time Interval (minutes)	Time step intervals used by the program for analyses. Default is set to analyze for glare at every one-minute interval throughout the year.
Time zone	Time zone difference from Greenwich Mean Time at the location of the analysis.
Tilt of Tracking Axis (deg)	The elevation angle of the tracking axis upon which panels rotate (e.g., torque tube), measured from flat ground. 0 deg implies the axis is on level, flat ground. Values between 0 and 30 deg are typical.
Vary Reflectivity	Varies panel reflectivity with sun position at each time step.
Maximum Downward Viewing Angle (deg)	The angle extending downward from the horizon indicating the maximum downward viewing angle from the cockpit. Used to determine whether glare is visible by the pilot along the flight path. Default is 30 degrees.

Sources:
Ho, Clifford, K., Cianan A. Sims, Julius E. Yellowhair. 2015. Solar Glare Hazard Analysis Tool (SGHAT) User's Manual v. 2H. Sandia National Laboratories.

ForgeSolar – PV Planning & Glare Analysis. https://www.forgesolar.com/

^{**} http://www.3tier.com/en/support/solar-prospecting-tools/what-direct-normal-irradiance-solar-prospecting/

1.0 INTRODUCTION

On behalf of PCR Lone Tree solar project, Stantec Consulting Services Inc. utilized the web-based ForgeSolar glare hazard analysis program to complete a glare analysis for the Project to determine the potential effect of glint and/or glare (glare) from the photovoltaic (PV) solar panels on pilots and airport operations, residents in the area, and drivers in the vicinity of the Project Area. The Project is approximately 2.5 miles northwest of the community of Lone Tree in Johnson County, central lowa (**Figure 1**).

ForgeSolar is an interactive tool that provides a quantified assessment of (1) when and where glare will occur throughout the year for a prescribed solar project and (2) potential effects on the human eye at locations where glare occurs. Glare can occur from the reflection of sunlight on the PV solar panels of utility-scale solar-powered electric generating facilities. While PV solar panels absorb direct sunlight, some reflection can occur when the panels are directed close to horizontal, which mainly occurs during sunset and sunrise when the incidence angle of the panels is highest, as depicted in **Figure 2** below.

ForgeSolar uses an interactive Google map for site location, mapping the proposed PV array(s) and specifying observer locations, vehicular travel routes, and flight paths. Latitude, longitude, and elevation are automatically recorded through the Google interface, providing necessary information for sun position and vector calculations. Additional information regarding the orientation and tilt of the PV solar panels, reflectance, environment, and ocular factors are entered by the user.

If glare is found, ForgeSolar calculates the retinal irradiance and subtended angle (size/distance) of the glare source to predict potential ocular hazards ranging from temporary after-image to retinal burn. The results are presented in a plot that specifies when glare will occur throughout the year, with color codes indicating the potential ocular hazard.

This study analyzes potential glare for pilots landing on all available approach paths at one airport located within 10 miles of the Project area (**Figure 3**). Glare analyses were also conducted for drivers of vehicles at five feet (ft) above ground level (AGL) for cars and small trucks and nine feet AGL for semi-truck viewing heights on two road segments adjacent to the PV panels (**Figure 4**).

The analysis also included potential glare to viewers at 6 unique structures, primarily residences, in the vicinity of the Project using a 16-ft AGL viewing height which is a conservative viewing height for one- and two-story structures (**Figure 4**). The airport, roadways, and structures were analyzed using 4.5-ft and 9-ft AGL panel heights. The arrays used in the analysis program were drawn to be conservative in the glare analysis by analyzing slightly more area than the panels will occupy.

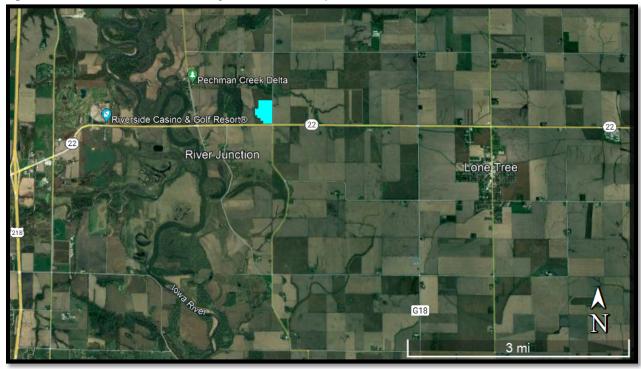


Figure 1. PCR Lone Tree Solar Project Location Map*

^{*}Project location is shown in blue. Source: Google Earth Imagery

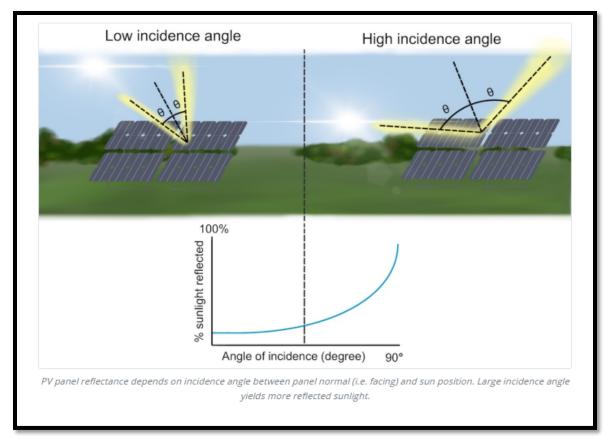


Figure 2. Reflectivity Differences Between Low and High Incidence Angles

Source: ForgeSolar 2022

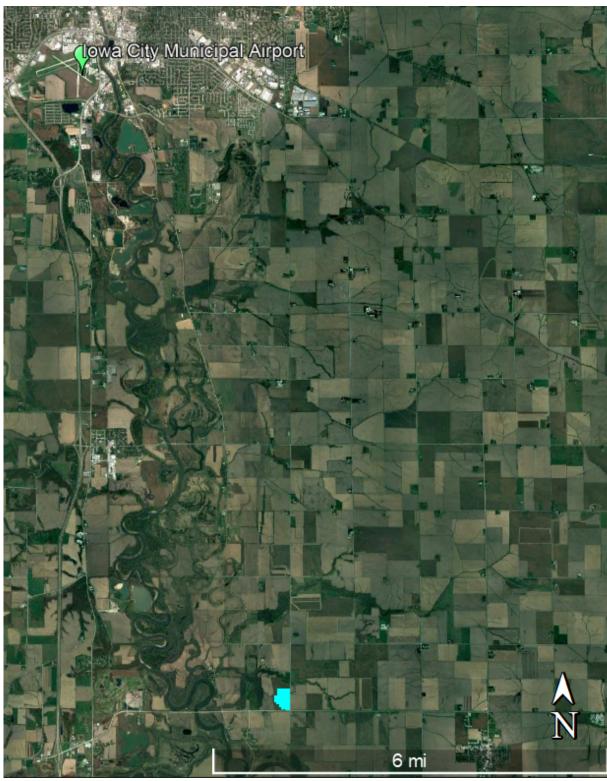


Figure 3. Airport Within Vicinity of the PCR Lone Tree Solar Project*

^{*}Project location is shown in blue. Source: Google Earth Imagery

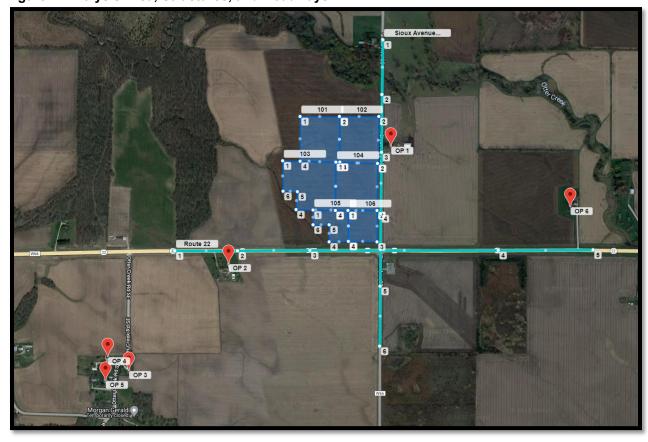


Figure 4: Analysis Area, Structures, and Roadways*

^{*}Red markers indicate structures, turquoise lines indicate roads, and blue polygons indicate PV arrays. Source: ForgeSolar, Google Earth Imagery

2.0 DATA INPUT SUMMARY

The parameters used for the analyses is listed in **Table 1** below. "Default" indicates the default parameter value set by ForgeSolar and is considered the most conservative value for the parameter. "Chosen" parameters were selected to perform the most conservative analysis concerning glare potential. "Provided" parameters are Project specific information provided by the client.

2.1 SOLAR ARRAY

The location of the solar array and array parameters used for the analyses is based on information provided by PCR Investments SP 2 LLC (**Table 1**). The analyses described below were conducted using 4.5-ft and 9-ft panel heights AGL. A detailed description of each parameter is provided in the Glossary.

Table 1: Solar Panel Parameters Used for Glare Analysis

Parameter	Value Used	Default, Chosen or Provided?
Axis tracking	Single	Provided
Tracking Axis Tilt (deg)	Varies – determined by	Shade-Slope Analysis
	ForgeSolar	Method Used
Tracking Axis Orientation (deg)	180.0	Provided
Tracking Axis Panel Offset (deg)	0.0	Default
Maximum Tracking Angle (deg)	60.0	Provided
Resting Angle (deg)	60.0	Provided
Rated Power (kW)	Not Used	NA
Vary reflectivity?	Yes	Default
Panel material	Smooth glass with Anti-	Provided
	Reflective Coating	
Time zone offset	-6	Based on site location
Subtended angle of sun (mrad)	9.3	Default
Peak DNI (W/m²)	1,000	Default
Ocular transmission coefficient	0.5	Default
Pupil diameter (m)	0.002	Default
Eye focal length (m)	0.017	Default
Time interval (min)	1	Default
Correlate slope error with surface	Yes	Default
type?		
Slope error (mrad)	8.43	Default

2.2 AIRPORT APPROACH PATHS AND AIR TRAFFIC CONTROL TOWER

One airport was found to be located within 10 miles of this project, including the lowa City Municipal Airport. There are no Air Traffic Control Towers (ATCTs) associated with this airport.

2.3 ROADWAYS AND PROPERTIES LOCATED ADJACENT TO THE SOLAR ARRAYS

This analysis included potential glare to vehicles traveling on two road segments in the vicinity of the Project Area. The ForgeSolar program sets the default viewing angle of the array at 50 degrees from the driver's direct line of sight when looking forward. The Federal Aviation Administration (FAA) has determined that glare beyond 50 degrees from the line of sight will not impact the viewer¹.

Potential glare to drivers was evaluated for both passenger vehicles and semi-trucks, where the passenger vehicles were assumed to have a maximum viewing height of five feet AGL, while the viewing height for drivers of semi-trucks was assumed to be a maximum of nine feet AGL. The location of the roadway routes analyzed is shown as blue-green route lines in **Figure 4**.

Analyses for each array block was run twice, once for 5-ft car heights and once for 9-ft truck heights, and once again for each of the two-panel heights (4.5-ft and 9-ft AGL).

Potential glare to viewers from 6 unique structures in the vicinity of the Project was also analyzed at 16-ft AGL viewing heights.

¹ Rogers, J. A., et al. (2015). Evaluation of Glare as a Hazard for General Aviation Pilots on Final Approach, Federal Aviation Administration (link)

3.0 GLARE ANALYSES RESULTS

The web-based ForgeSolar program was used to analyze glare potential in one-minute increments throughout the year. The program identifies the three following types of glare (no color indicates no glare predicted):

GREEN - Low potential for temporary after-image.
YELLOW - Potential for temporary after-image.
RED - Potential for permanent eye damage.

3.1 AIRPORT APPROACH PATHS

Glare is not predicted for pilots approaching any of the airport runways at the airport depicted in **Figure 3**, at any time of the day, any time throughout the year based on the input parameters described above.

3.2 AIR TRAFFIC CONTROL TOWERS

There are no ATCTs associated with the airport included in this analysis and therefore no impacts are predicted to ATCT staff as a result of this Project.

3.3 ROADWAYS AND PROPERTIES LOCATED ADJACENT TO THE SOLAR ARRAYS

Glare is not predicted for drivers along any of the two road segments analyzed that are adjacent to the Project area. The potential for glare for a range of driver conditions was evaluated for viewing heights of five feet for cars and small trucks and nine feet for semi-trucks. Glare is also not predicted for 6 unique structures analyzed at 16-ft viewing heights, as shown in **Figure 4**.

4.0 CONCLUSIONS

Based on the solar array parameters provided, glare is not predicted for planes approaching the lowa City Municipal Airport (**Figure 3**). Glare is not predicted for drivers of vehicles on either of the roadways adjacent to the Project area, including Sioux Avenue Southeast and Route 22, at viewing heights of five feet for cars and small trucks and nine feet for semi-trucks. Glare is also not predicted for 6 unique structures with 16-ft viewing heights (**Figure 4**). All receptors were analyzed using 4.5-ft and 9-ft AGL panel heights.

APPENDIX A

ForgeSolar Reports





Lone Tree 5ft vehicles 4_5ft panels

Created Jul 19, 2022 Updated May 22, 2023 Time-step 1 minute Timezone offset UTC-6 Minimum sun altitude 0.0 deg Site ID 72737.12762

Project type Advanced Project status: active Category 5 MW to 10 MW



Misc. Analysis Settings

DNI: varies (1,000.0 W/m^2 peak)
Ocular transmission coefficient: 0.5
Pupil diameter: 0.002 m
Eye focal length: 0.017 m
Sun subtended angle: 9.3 mrad

PV Analysis Methodology: **Version 2** Enhanced subtended angle calculation: **Off**

Summary of Results No glare predicted!

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced
	deg	deg	min	min	kWh
101	SA tracking	SA tracking	0	0	-
102	SA tracking	SA tracking	0	0	-
103	SA tracking	SA tracking	0	0	-
104	SA tracking	SA tracking	0	0	-
105	SA tracking	SA tracking	0	0	-
106	SA tracking	SA tracking	0	0	-



PV Array(s)

Total PV footprint area: 37.8 acres

Name: 101


Footprint area: 7.0 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.487308	645.37	4.50	649.87
2	41.501254	-91.485420	649.54	4.50	654.04
3	41.499631	-91.485431	644.08	4.50	648.58
4	41.499655	-91.487319	642.08	4.50	646.58

Name: 102

Footprint area: 7.1 acres Axis tracking: Single-axis rotation
Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.485431	649.49	4.50	653.99
2	41.501262	-91.483543	651.05	4.50	655.55
3	41.499575	-91.483586	650.80	4.50	655.30
4	41.499623	-91.485409	644.09	4.50	648.59

Name: 103 Footprint area: 9.1 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499679	-91.488156	640.87	4.50	645.37
2	41.499623	-91.485613	643.76	4.50	648.26
3	41.497887	-91.485635	643.84	4.50	648.34
4	41.497919	-91.487512	638.22	4.50	642.72
5	41.498570	-91.487448	643.65	4.50	648.15
6	41.498586	-91.488135	637.87	4.50	642.37

Name: 104

Footprint area: 7.8 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope

Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499623	-91.485592	643.77	4.50	648.27
2	41.499575	-91.483607	650.77	4.50	655.27
3	41.497895	-91.483628	644.53	4.50	649.03
4	41.497895	-91.485624	643.80	4.50	648.30

Name: 105
Footprint area: 3.4 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497911	-91.486686	641.06	4.50	645.56
2	41.497895	-91.485002	644.77	4.50	649.27
3	41.496778	-91.484980	647.97	4.50	652.47
4	41.496762	-91.485924	641.14	4.50	645.64
5	41.497373	-91.485924	644.85	4.50	649.35
6	41.497373	-91.486697	639.92	4.50	644.42

Name: 106

Footprint area: 3.5 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope


Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497887	-91.485012	644.72	4.50	649.22
2	41.497895	-91.483618	644.58	4.50	649.08
3	41.496770	-91.483628	644.80	4.50	649.30
4	41.496778	-91.484991	648.05	4.50	652.55

2-Mile Flight Path Receptor(s)

Name: Iowa City Municipal Airport Runway 12

Description: Threshold height: 50 ft Direction: 124.9 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg



Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641881	-91.552672	658.24	50.00	708.24
2-mile point	41.658402	-91.584459	734.61	527.06	1261.67

Name: Iowa City Municipal Airport Runway 25

Threshold height: 50 ft Direction: 250.5 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

morning of the second	h h	The
form a different and a few second		

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641981	-91.543386	651.92	50.00	701.92
2-mile point	41.651642	-91.506878	688.34	567.01	1255.34

Name: Iowa City Municipal Airport Runway 30

Description:

Threshold height: 50 ft Direction: 301.1 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg



Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.635859	-91.541074	645.73	50.00	695.73
2-mile point	41.620912	-91.507921	654.76	594.39	1249.16

Name: Iowa City Municipal Airport Runway 7

Description: Threshold height: 50 ft Direction: 70.7 deg Glide slope: 3.0 deg Pilot view restricted? Yes

Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.638252	-91.557687	679.27	50.00	729.27
2-mile point	41.628682	-91.594236	777.37	505.33	1282.70



Route Receptor(s)

Name: Route 22 Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.496439	-91.493315	645.62	5.00	650.62
2	41.496447	-91.490311	645.46	5.00	650.46
3	41.496463	-91.486846	644.99	5.00	649.99
4	41.496459	-91.477801	652.79	5.00	657.79
5	41.496471	-91.473263	650.90	5.00	655.90

Name: Sioux Avenue Southeast Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.504006	-91.483348	652.99	5.00	657.99
2	41.502052	-91.483383	638.82	5.00	643.82
3	41.499975	-91.483420	653.88	5.00	658.88
4	41.497781	-91.483445	645.61	5.00	650.61
5	41.495169	-91.483477	646.28	5.00	651.28
6	41.493024	-91.483488	649.02	5.00	654.02

Discrete Observation Receptors

Number	Latitude	Longitude	Ground elevation	Height above ground	Total Elevation
	deg	deg	ft	ft	ft
OP 1	41.500190	-91.482968	659.48	16.00	675.48
OP 2	41.495973	-91.490753	649.46	16.00	665.46
OP 3	41.492142	-91.495540	651.68	16.00	667.68
OP 4	41.492636	-91.496554	647.76	16.00	663.76
OP 5	41.491784	-91.496656	660.00	16.00	676.00
OP 6	41.498026	-91.474356	657.87	16.00	673.87

Summary of PV Glare Analysis

PV configuration and total predicted glare

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced	Data File
	deg	deg	min	min	kWh	
101	SA tracking	SA tracking	0	0	-	-
102	SA tracking	SA tracking	0	0	-	-
103	SA tracking	SA tracking	0	0	-	-
104	SA tracking	SA tracking	0	0	-	-
105	SA tracking	SA tracking	0	0	-	-
106	SA tracking	SA tracking	0	0	-	-

PV & Receptor Analysis Results

Results for each PV array and receptor

101 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

102 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

103 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

104 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

105 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

106 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Assumptions

- Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.
- Glare analyses do not automatically account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographi obstructions.
- Detailed system geometry is not rigorously simulated.
- The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time.
 Actual values and results may vary.
- The system output calculation is a DNI-based approximation that assumes clear, sunny skies year-round. It should not be used in place of more rigorous modeling methods.
- Several V1 calculations utilize the PV array centroid, rather than the actual glare spot location, due to algorithm limitations. This may affect results for larg PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.
- The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size. Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)
- Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid. Actual ocular impact outcomes encompass a continuous, no discrete, spectrum.
- · Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.
- Refer to the Help page for detailed assumptions and limitations not listed here.



Lone Tree

5ft vehicles 9ft panels 60 rest

Created Jul 19, 2022 Updated May 22, 2023 Time-step 1 minute Timezone offset UTC-6 Minimum sun altitude 0.0 deg Site ID 72738.12762

Project type Advanced Project status: active Category 5 MW to 10 MW



Misc. Analysis Settings

DNI: varies (1,000.0 W/m^2 peak) Ocular transmission coefficient: 0.5 Pupil diameter: 0.002 m Eye focal length: 0.017 m Sun subtended angle: 9.3 mrad PV Analysis Methodology: **Version 2** Enhanced subtended angle calculation: **Off**

Summary of Results No glare predicted!

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced
	deg	deg	min	min	kWh
101	SA tracking	SA tracking	0	0	-
102	SA tracking	SA tracking	0	0	-
103	SA tracking	SA tracking	0	0	-
104	SA tracking	SA tracking	0	0	-
105	SA tracking	SA tracking	0	0	-
106	SA tracking	SA tracking	0	0	-



PV Array(s)

Total PV footprint area: 37.8 acres

Name: 101


Footprint area: 7.0 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.487308	645.37	9.00	654.37
2	41.501254	-91.485420	649.54	9.00	658.54
3	41.499631	-91.485431	644.08	9.00	653.08
4	41.499655	-91.487319	642.08	9.00	651.08

Name: 102

Footprint area: 7.1 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.485431	649.49	9.00	658.49
2	41.501262	-91.483543	651.05	9.00	660.05
3	41.499575	-91.483586	650.80	9.00	659.80
4	41.499623	-91.485409	644.09	9.00	653.09

Name: 103 Footprint area: 9.1 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499679	-91.488156	640.87	9.00	649.87
2	41.499623	-91.485613	643.76	9.00	652.76
3	41.497887	-91.485635	643.84	9.00	652.84
4	41.497919	-91.487512	638.22	9.00	647.22
5	41.498570	-91.487448	643.65	9.00	652.65
6	41.498586	-91.488135	637.87	9.00	646.87

Name: 104

Footprint area: 7.8 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499623	-91.485592	643.77	9.00	652.77
2	41.499575	-91.483607	650.77	9.00	659.77
3	41.497895	-91.483628	644.53	9.00	653.53
4	41.497895	-91.485624	643.80	9.00	652.80

Name: 105 Footprint area: 3.4 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5



Vertex

1

Latitude

deg

41.497911

Longitude

deg

-91.486686

Ground elevation

ft

641.06

644.77

Height above ground

ft

9.00

9.00

9.00

9.00

9.00

9.00

Total elevation

ft

650.06

653.77

656.97

650.14

653.85

648.92

Name: 106

Footprint area: 3.5 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope

Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497887	-91.485012	644.72	9.00	653.72
2	41.497895	-91.483618	644.58	9.00	653.58
3	41.496770	-91.483628	644.80	9.00	653.80
4	41.496778	-91.484991	648.05	9.00	657.05

2-Mile Flight Path Receptor(s)

Name: Iowa City Municipal Airport Runway 12

Description: Threshold height: 50 ft Direction: 124.9 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg



Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641881	-91.552672	658.24	50.00	708.24
2-mile point	41.658402	-91.584459	734.61	527.06	1261.67

Name: Iowa City Municipal Airport Runway 25

Threshold height: 50 ft Direction: 250.5 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

mornifold to the	h h	The
form a different and a few second		

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641981	-91.543386	651.92	50.00	701.92
2-mile point	41.651642	-91.506878	688.34	567.01	1255.34

Name: Iowa City Municipal Airport Runway 30

Description:

Threshold height: 50 ft Direction: 301.1 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg



Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.635859	-91.541074	645.73	50.00	695.73
2-mile point	41.620912	-91.507921	654.76	594.39	1249.16

Name: Iowa City Municipal Airport Runway 7

Description: Threshold height: 50 ft Direction: 70.7 deg Glide slope: 3.0 deg Pilot view restricted? Yes

Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.638252	-91.557687	679.27	50.00	729.27
2-mile point	41.628682	-91.594236	777.37	505.33	1282.70



Route Receptor(s)

Name: Route 22 Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.496439	-91.493315	645.62	5.00	650.62
2	41.496447	-91.490311	645.46	5.00	650.46
3	41.496463	-91.486846	644.99	5.00	649.99
4	41.496459	-91.477801	652.79	5.00	657.79
5	41.496471	-91.473263	650.90	5.00	655.90

Name: Sioux Avenue Southeast Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.504006	-91.483348	652.99	5.00	657.99
2	41.502052	-91.483383	638.82	5.00	643.82
3	41.499975	-91.483420	653.88	5.00	658.88
4	41.497781	-91.483445	645.61	5.00	650.61
5	41.495169	-91.483477	646.28	5.00	651.28
6	41.493024	-91.483488	649.02	5.00	654.02

Discrete Observation Receptors

Number	Latitude	Longitude	Ground elevation	Height above ground	Total Elevation
	deg	deg	ft	ft	ft
OP 1	41.500190	-91.482968	659.48	16.00	675.48
OP 2	41.495973	-91.490753	649.46	16.00	665.46
OP 3	41.492142	-91.495540	651.68	16.00	667.68
OP 4	41.492636	-91.496554	647.76	16.00	663.76
OP 5	41.491784	-91.496656	660.00	16.00	676.00
OP 6	41.498026	-91.474356	657.87	16.00	673.87

Summary of PV Glare Analysis

PV configuration and total predicted glare

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced	Data File
	deg	deg	min	min	kWh	
101	SA tracking	SA tracking	0	0	-	-
102	SA tracking	SA tracking	0	0	-	-
103	SA tracking	SA tracking	0	0	-	-
104	SA tracking	SA tracking	0	0	-	-
105	SA tracking	SA tracking	0	0	-	-
106	SA tracking	SA tracking	0	0	-	-

PV & Receptor Analysis Results

Results for each PV array and receptor

101 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

103 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

105 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

Assumptions

- Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.
- Glare analyses do not automatically account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographi obstructions.
- Detailed system geometry is not rigorously simulated.
- The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time.
 Actual values and results may vary.
- The system output calculation is a DNI-based approximation that assumes clear, sunny skies year-round. It should not be used in place of more rigorous modeling methods.
- Several V1 calculations utilize the PV array centroid, rather than the actual glare spot location, due to algorithm limitations. This may affect results for larg PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.
- The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size. Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)
- Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid. Actual ocular impact outcomes encompass a continuous, no discrete, spectrum.
- · Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.
- Refer to the Help page for detailed assumptions and limitations not listed here.



Lone Tree 9ft vehicles 4_5ft panels

Created Jul 18, 2022 Updated May 22, 2023 Time-step 1 minute Timezone offset UTC-6 Minimum sun altitude 0.0 deg Site ID 72597.12762

Project type Advanced Project status: active Category 5 MW to 10 MW



Misc. Analysis Settings

DNI: varies (1,000.0 W/m^2 peak) Ocular transmission coefficient: 0.5 Pupil diameter: 0.002 m Eye focal length: 0.017 m Sun subtended angle: 9.3 mrad PV Analysis Methodology: **Version 2** Enhanced subtended angle calculation: **Off**

Summary of Results No glare predicted!

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced
	deg	deg	min	min	kWh
101	SA tracking	SA tracking	0	0	-
102	SA tracking	SA tracking	0	0	-
103	SA tracking	SA tracking	0	0	-
104	SA tracking	SA tracking	0	0	-
105	SA tracking	SA tracking	0	0	-
106	SA tracking	SA tracking	0	0	-



PV Array(s)

Total PV footprint area: 37.8 acres

Name: 101


Footprint area: 7.0 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.487308	645.37	4.50	649.87
2	41.501254	-91.485420	649.54	4.50	654.04
3	41.499631	-91.485431	644.08	4.50	648.58
4	41.499655	-91.487319	642.08	4.50	646.58

Name: 102

Footprint area: 7.1 acres Axis tracking: Single-axis rotation
Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.485431	649.49	4.50	653.99
2	41.501262	-91.483543	651.05	4.50	655.55
3	41.499575	-91.483586	650.80	4.50	655.30
4	41.499623	-91.485409	644.09	4.50	648.59

Name: 103
Footprint area: 9.1 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg
Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499679	-91.488156	640.87	4.50	645.37
2	41.499623	-91.485613	643.76	4.50	648.26
3	41.497887	-91.485635	643.84	4.50	648.34
4	41.497919	-91.487512	638.22	4.50	642.72
5	41.498570	-91.487448	643.65	4.50	648.15
6	41.498586	-91.488135	637.87	4.50	642.37

Name: 104

Footprint area: 7.8 acres

Axis tracking: Single-axis rotation

Backtracking: Shade-slope

Tracking axis orientation: 180.0 de

Tracking axis orientation: 180.0 deg

Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499623	-91.485592	643.77	4.50	648.27
2	41.499575	-91.483607	650.77	4.50	655.27
3	41.497895	-91.483628	644.53	4.50	649.03
4	41.497895	-91.485624	643.80	4.50	648.30

Name: 105
Footprint area: 3.4 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497911	-91.486686	641.06	4.50	645.56
2	41.497895	-91.485002	644.77	4.50	649.27
3	41.496778	-91.484980	647.97	4.50	652.47
4	41.496762	-91.485924	641.14	4.50	645.64
5	41.497373	-91.485924	644.85	4.50	649.35
6	41.497373	-91.486697	639.92	4.50	644.42

Name: 106

Footprint area: 3.5 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope

Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad




Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497887	-91.485012	644.72	4.50	649.22
2	41.497895	-91.483618	644.58	4.50	649.08
3	41.496770	-91.483628	644.80	4.50	649.30
4	41.496778	-91.484991	648.05	4.50	652.55

2-Mile Flight Path Receptor(s)

Name: Iowa City Municipal Airport Runway 12

Description:

Threshold height: 50 ft
Direction: 124.9 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 50.0 deg





Name: Iowa City Municipal Airport Runway 25

Description

Threshold height: 50 ft Direction: 250.5 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641981	-91.543386	651.92	50.00	701.92
2-mile point	41.651642	-91.506878	688.34	567.01	1255.34



Name: Iowa City Municipal Airport Runway 30

Description:

Threshold height: 50 ft Direction: 301.1 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.635859	-91.541074	645.73	50.00	695.73
2-mile point	41.620912	-91.507921	654.76	594.39	1249.16



Name: Iowa City Municipal Airport Runway 7

Description: Threshold height: 50 ft Direction: 70.7 deg Glide slope: 3.0 deg Pilot view restricted? Yes

Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.638252	-91.557687	679.27	50.00	729.27
2-mile point	41.628682	-91.594236	777.37	505.33	1282.70



Route Receptor(s)

Name: Route 22 Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.496439	-91.493315	645.62	9.00	654.62
2	41.496447	-91.490311	645.46	9.00	654.46
3	41.496463	-91.486846	644.99	9.00	653.99
4	41.496459	-91.477801	652.79	9.00	661.79
5	41.496471	-91.473263	650.90	9.00	659.90

Name: Sioux Avenue Southeast Route type Two-way View angle: 50.0 deg



Latitude	Longitude	Ground elevation	Height above ground	Total elevation
deg	deg	ft	ft	ft
41.504006	-91.483348	652.99	9.00	661.99
41.502052	-91.483383	638.82	9.00	647.82
41.499975	-91.483420	653.88	9.00	662.88
41.497781	-91.483445	645.61	9.00	654.61
41.495169	-91.483477	646.28	9.00	655.28
41.493024	-91.483488	649.02	9.00	658.02
	deg 41.504006 41.502052 41.499975 41.497781 41.495169	deg deg 41.504006 -91.483348 41.502052 -91.483383 41.499975 -91.483420 41.497781 -91.483445 41.495169 -91.483477	deg deg ft 41.504006 -91.483348 652.99 41.502052 -91.483383 638.82 41.499975 -91.483420 653.88 41.497781 -91.483445 645.61 41.495169 -91.483477 646.28	deg deg ft ft 41.504006 -91.483348 652.99 9.00 41.502052 -91.483383 638.82 9.00 41.499975 -91.483420 653.88 9.00 41.497781 -91.483445 645.61 9.00 41.495169 -91.483477 646.28 9.00

Discrete Observation Receptors

Number	Latitude	Longitude	Ground elevation	Height above ground	Total Elevation
	deg	deg	ft	ft	ft
OP 1	41.500190	-91.482968	659.48	16.00	675.48
OP 2	41.495973	-91.490753	649.46	16.00	665.46
OP 3	41.492142	-91.495540	651.68	16.00	667.68
OP 4	41.492636	-91.496554	647.76	16.00	663.76
OP 5	41.491784	-91.496656	660.00	16.00	676.00
OP 6	41.498026	-91.474356	657.87	16.00	673.87

Summary of PV Glare Analysis

PV configuration and total predicted glare

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced	Data File
	deg	deg	min	min	kWh	
101	SA tracking	SA tracking	0	0	-	-
102	SA tracking	SA tracking	0	0	-	-
103	SA tracking	SA tracking	0	0	-	-
104	SA tracking	SA tracking	0	0	-	-
105	SA tracking	SA tracking	0	0	-	-
106	SA tracking	SA tracking	0	0	-	-

PV & Receptor Analysis Results

Results for each PV array and receptor

101 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

103 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

105 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

Assumptions

- Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.
- Glare analyses do not automatically account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographi obstructions.
- Detailed system geometry is not rigorously simulated.
- The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time.
 Actual values and results may vary.
- The system output calculation is a DNI-based approximation that assumes clear, sunny skies year-round. It should not be used in place of more rigorous modeling methods.
- Several V1 calculations utilize the PV array centroid, rather than the actual glare spot location, due to algorithm limitations. This may affect results for larg PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.
- The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size. Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)
- Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid. Actual ocular impact outcomes encompass a continuous, no discrete, spectrum.
- · Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.
- Refer to the Help page for detailed assumptions and limitations not listed here.



Lone Tree

9ft vehicles 9ft panels 60 rest

Created Jul 19, 2022 Updated May 22, 2023 Time-step 1 minute Timezone offset UTC-6 Minimum sun altitude 0.0 deg Site ID 72739.12762

Project type Advanced Project status: active Category 5 MW to 10 MW



Misc. Analysis Settings

DNI: varies (1,000.0 W/m^2 peak) Ocular transmission coefficient: 0.5 Pupil diameter: 0.002 m Eye focal length: 0.017 m Sun subtended angle: 9.3 mrad PV Analysis Methodology: **Version 2** Enhanced subtended angle calculation: **Off**

Summary of Results No glare predicted!

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced
	deg	deg	min	min	kWh
101	SA tracking	SA tracking	0	0	-
102	SA tracking	SA tracking	0	0	-
103	SA tracking	SA tracking	0	0	-
104	SA tracking	SA tracking	0	0	-
105	SA tracking	SA tracking	0	0	-
106	SA tracking	SA tracking	0	0	-



PV Array(s)

Total PV footprint area: 37.8 acres

Name: 101


Footprint area: 7.0 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg **Ground Coverage Ratio**: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.487308	645.37	9.00	654.37
2	41.501254	-91.485420	649.54	9.00	658.54
3	41.499631	-91.485431	644.08	9.00	653.08
4	41.499655	-91.487319	642.08	9.00	651.08

Name: 102

Footprint area: 7.1 acres Axis tracking: Single-axis rotation Backtracking: Shade-slope Tracking axis orientation: 180.0 deg Maximum tracking angle: 60.0 deg Resting angle: 60.0 deg

Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes
Correlate slope error with surface type? Yes
Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.501270	-91.485431	649.49	9.00	658.49
2	41.501262	-91.483543	651.05	9.00	660.05
3	41.499575	-91.483586	650.80	9.00	659.80
4	41.499623	-91.485409	644.09	9.00	653.09

Name: 103
Footprint area: 9.1 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg
Resting angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499679	-91.488156	640.87	9.00	649.87
2	41.499623	-91.485613	643.76	9.00	652.76
3	41.497887	-91.485635	643.84	9.00	652.84
4	41.497919	-91.487512	638.22	9.00	647.22
5	41.498570	-91.487448	643.65	9.00	652.65
6	41.498586	-91.488135	637.87	9.00	646.87

Name: 104

Footprint area: 7.8 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 de

Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg
Resting angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.499623	-91.485592	643.77	9.00	652.77
2	41.499575	-91.483607	650.77	9.00	659.77
3	41.497895	-91.483628	644.53	9.00	653.53
4	41.497895	-91.485624	643.80	9.00	652.80

Name: 105
Footprint area: 3.4 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope
Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497911	-91.486686	641.06	9.00	650.06
2	41.497895	-91.485002	644.77	9.00	653.77
3	41.496778	-91.484980	647.97	9.00	656.97
4	41.496762	-91.485924	641.14	9.00	650.14
5	41.497373	-91.485924	644.85	9.00	653.85
6	41.497373	-91.486697	639.92	9.00	648.92

Name: 106

Footprint area: 3.5 acres
Axis tracking: Single-axis rotation
Backtracking: Shade-slope


Tracking axis orientation: 180.0 deg
Maximum tracking angle: 60.0 deg

Resting angle: 60.0 deg Ground Coverage Ratio: 0.5

Rated power: -

Panel material: Smooth glass with AR coating Vary reflectivity with sun position? Yes Correlate slope error with surface type? Yes

Slope error: 8.43 mrad




Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.497887	-91.485012	644.72	9.00	653.72
2	41.497895	-91.483618	644.58	9.00	653.58
3	41.496770	-91.483628	644.80	9.00	653.80
4	41.496778	-91.484991	648.05	9.00	657.05

2-Mile Flight Path Receptor(s)

Name: Iowa City Municipal Airport Runway 12

Description:

Threshold height: 50 ft
Direction: 124.9 deg
Glide slope: 3.0 deg
Pilot view restricted? Yes
Vertical view restriction: 30.0 deg
Azimuthal view restriction: 50.0 deg





Name: Iowa City Municipal Airport Runway 25

Description

Threshold height: 50 ft Direction: 250.5 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.641981	-91.543386	651.92	50.00	701.92
2-mile point	41.651642	-91.506878	688.34	567.01	1255.34



Name: Iowa City Municipal Airport Runway 30

Description:

Threshold height: 50 ft Direction: 301.1 deg Glide slope: 3.0 deg Pilot view restricted? Yes Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.635859	-91.541074	645.73	50.00	695.73
2-mile point	41.620912	-91.507921	654.76	594.39	1249.16



Name: Iowa City Municipal Airport Runway 7

Description: Threshold height: 50 ft Direction: 70.7 deg Glide slope: 3.0 deg Pilot view restricted? Yes

Vertical view restriction: 30.0 deg Azimuthal view restriction: 50.0 deg

Point	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
Threshold	41.638252	-91.557687	679.27	50.00	729.27
2-mile point	41.628682	-91.594236	777.37	505.33	1282.70



Route Receptor(s)

Name: Route 22 Route type Two-way View angle: 50.0 deg



Vertex	Latitude	Longitude	Ground elevation	Height above ground	Total elevation
	deg	deg	ft	ft	ft
1	41.496439	-91.493315	645.62	9.00	654.62
2	41.496447	-91.490311	645.46	9.00	654.46
3	41.496463	-91.486846	644.99	9.00	653.99
4	41.496459	-91.477801	652.79	9.00	661.79
5	41.496471	-91.473263	650.90	9.00	659.90

Name: Sioux Avenue Southeast Route type Two-way View angle: 50.0 deg



Latitude	Longitude	Ground elevation	Height above ground	Total elevation
deg	deg	ft	ft	ft
41.504006	-91.483348	652.99	9.00	661.99
41.502052	-91.483383	638.82	9.00	647.82
41.499975	-91.483420	653.88	9.00	662.88
41.497781	-91.483445	645.61	9.00	654.61
41.495169	-91.483477	646.28	9.00	655.28
41.493024	-91.483488	649.02	9.00	658.02
	deg 41.504006 41.502052 41.499975 41.497781 41.495169	deg deg 41.504006 -91.483348 41.502052 -91.483383 41.499975 -91.483420 41.497781 -91.483445 41.495169 -91.483477	deg deg ft 41.504006 -91.483348 652.99 41.502052 -91.483383 638.82 41.499975 -91.483420 653.88 41.497781 -91.483445 645.61 41.495169 -91.483477 646.28	deg deg ft ft 41.504006 -91.483348 652.99 9.00 41.502052 -91.483383 638.82 9.00 41.499975 -91.483420 653.88 9.00 41.497781 -91.483445 645.61 9.00 41.495169 -91.483477 646.28 9.00

Discrete Observation Receptors

Number	Latitude	Longitude	Ground elevation	Height above ground	Total Elevation
	deg	deg	ft	ft	ft
OP 1	41.500190	-91.482968	659.48	16.00	675.48
OP 2	41.495973	-91.490753	649.46	16.00	665.46
OP 3	41.492142	-91.495540	651.68	16.00	667.68
OP 4	41.492636	-91.496554	647.76	16.00	663.76
OP 5	41.491784	-91.496656	660.00	16.00	676.00
OP 6	41.498026	-91.474356	657.87	16.00	673.87

Summary of PV Glare Analysis

PV configuration and total predicted glare

PV Name	Tilt	Orientation	"Green" Glare	"Yellow" Glare	Energy Produced	Data File
	deg	deg	min	min	kWh	
101	SA tracking	SA tracking	0	0	-	-
102	SA tracking	SA tracking	0	0	-	-
103	SA tracking	SA tracking	0	0	-	-
104	SA tracking	SA tracking	0	0	-	-
105	SA tracking	SA tracking	0	0	-	-
106	SA tracking	SA tracking	0	0	-	-

PV & Receptor Analysis Results

Results for each PV array and receptor

101 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

103 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

105 no glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

No glare found

Component	Green glare (min)	Yellow glare (min)
FP: Iowa City Municipal Airport Runway 12	0	0
FP: Iowa City Municipal Airport Runway 25	0	0
FP: Iowa City Municipal Airport Runway 30	0	0
FP: Iowa City Municipal Airport Runway 7	0	0
OP: OP 1	0	0
OP: OP 2	0	0
OP: OP 3	0	0
OP: OP 4	0	0
OP: OP 5	0	0
OP: OP 6	0	0
Route: Route 22	0	0
Route: Sioux Avenue Southeast	0	0

Assumptions

- Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.
- Glare analyses do not automatically account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographi obstructions.
- Detailed system geometry is not rigorously simulated.
- The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time.
 Actual values and results may vary.
- The system output calculation is a DNI-based approximation that assumes clear, sunny skies year-round. It should not be used in place of more rigorous modeling methods.
- Several V1 calculations utilize the PV array centroid, rather than the actual glare spot location, due to algorithm limitations. This may affect results for larg PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.
- The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size. Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)
- Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid. Actual ocular impact outcomes encompass a continuous, no discrete, spectrum.
- · Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.
- Refer to the Help page for detailed assumptions and limitations not listed here.



Attachment G: Operations and Maintenance Plan



Operations and Maintenance Plan

PCR Energy Solar Projects Iowa

June 12, 2023

Prepared for:

PCR Energy 1334 Brittmoore Rd. Suite 1327 Houston, TX 77043

Prepared by:

Stantec Consulting Services Inc. 2300 Swan Lake Boulevard, Suite 202 Independence, IA 50644

Table of Contents

1.0	INTRODU	CTION	1
2.0	SOIL ERO	OSION AND SEDIMENT CONTROL	2
3.0	VEGETAT	TION MANAGEMENT PLAN	3
4.0	OPERATI	ONS AND MAINTENANCE	4
LIST C	OF TABLES	3	
Table		d operations, maintenance, and monitoring activities for the PCR sites	5
LIST C	OF APPEN	DICES	
APPE	NDIX A	PRELIMINARY SITE LAYOUT	A-1
APPE	NDIX B	STORMWATER POLLUTION PREVENTION PLAN	B-1
APPE	NDIX C	VEGETATION MANAGEMENT PLAN	C-1
APPE	NDIX D	EMERGENCY RESPONSE PLAN	D-1



i

Introduction June 12, 2023

1.0 INTRODUCTION

This Operations and Maintenance Plan (O&M Plan) is prepared for PCR Energy for the PCR Energy Solar Projects (Projects) in Iowa. This O&M Plan describes soil erosion and sediment controls, ground cover and buffer areas, and general procedures for operation and maintenance of the facilities, including maintaining safe access and ongoing maintenance and repair.

The main text of this O&M Plan applies generally to the Projects in Iowa. The appendices include project-specific information that addresses the specific design and location of the applicable project. A project-specific preliminary layout is provided in Appendix A.



1

Soil Erosion and Sediment Control June 12, 2023

2.0 SOIL EROSION AND SEDIMENT CONTROL

The Environmental Protection Agency (EPA) National Pollutant Discharge Elimination System (NPDES) established by the Clean Water Act provides the framework of requirements for compliance to discharge stormwater from a construction site. Because the Projects will disturb more than one acre of land during construction, the Projects are required to have construction site stormwater runoff permit coverage.

For sites in Iowa, prior to construction, PCR or its contractors will prepare and submit a Notice of Intent (NOI) application to Iowa Department of Natural Resources (DNR) for coverage of construction site stormwater runoff under a NPDES General Permit No. 2, per Iowa requirements. The submittal will include a copy of the completed NOI application and a project-specific Stormwater Pollution Prevention Plan (SWPPP). A copy of the NPDES permit will be provided to Johnson County prior to any ground disturbance.

The SWPPP is for implementation by PCR or its contractors (specifically, the person or persons with either operational control of construction project plans and specifications, or day-to-day operational control of activities necessary to ensure compliance with storm water NPDES permit conditions) during all roadwork and site development work. The SWPPP describes how erosion and sedimentation on a project site will be managed to minimize sediment discharge offsite or to a water of the state. The SWPPP also addresses management of potential pollutant-generating activities during construction, such as refueling. The SWPPP will also address post-construction land use. The SWPPP will be prepared closer to the start of construction, to reflect final project design and once project disturbance limits are known for each project. Once prepared, the project-specific SWPPP will be added to Appendix B of this O&M Plan.



Vegetation Management Plan June 12, 2023

3.0 VEGETATION MANAGEMENT PLAN

The ground around and under the solar arrays and in the border areas within each the project fence line will be planted and maintained in perennial vegetated ground cover. A project-specific vegetation management plan has been prepared and is attached in Appendix C.

Topsoil will not be removed from the project's property boundaries during development (unless part of a remediation effort). Perennial vegetation will be planted and maintained in a density sufficient to prevent erosion, manage runoff, and build soil. The seed mix and seed density is described in the attached plan. Monitoring and maintenance practices are also described in the attached plan.



Operations and Maintenance June 12, 2023

4.0 OPERATIONS AND MAINTENANCE

The Owner anticipates that its facilities will be staffed with technicians stationed off site and that, accordingly, site monitoring will occur remotely on a regular, ongoing basis. Visual and planned maintenance of the solar arrays, balance of plant, and substation, combined with ad hoc troubleshooting of inverters, solar arrays, substation, and other components will ensure that technicians are aware of the physical conditions on a regular basis.

The resting angle of the panels will be 0 degrees during the overnight hours; however, to minimize glare to neighboring properties and motorists, the panels will not be placed in a 0-degree position shortly after sunrise or shortly before sunset.

The table below describes the standard operations, maintenance, and monitoring activities for the Projects (Table 1). Maintenance shall include, but not be limited to, painting, structural repairs, and integrity of security measures. Depending on facility needs and industry best practices for operations and maintenance, the scheduled services may change in both frequency and scope over the facility's expected life of at least 30 years. Any retrofit, replacement or refurbishment of equipment shall adhere to all applicable local, state and federal requirements.



Operations and Maintenance June 12, 2023

Table 1. Standard operations, maintenance, and monitoring activities for the PCR sites in lowa

Description	Frequency	Scope of Work		
Administration, Planned Maintenance, Safety, & Monitoring				
Remote Monitoring and Site Dispatch	Ongoing	Remotely monitor Project 24/7/365. To include remote monitoring of inverters and substation vitals, interaction with ISO and off-taker, coordinate with onsite personnel for onsite reactive maintenance work and troubleshooting per OEM guidelines.		
	Ongoing	Real time analysis of asset performance and interaction with site crew to remediate observed underperformance.		
	As needed	Remotely dispatch facility setpoints based on ISO and off-taker scheduled outages, unscheduled outages, and curtailment events. Quantify impact of outages and events.		
Facility Performance and Administrative Reporting	Monthly	Generate reports inclusive of site generation, resource adjusted generation, inverter and outage events, performance ratio calculations, warranty administration progress, NERC related events (if applicable), and balance of plant status (including vegetation, security, roads, fencing).		
	As needed	Implement a Performance Analytics program to monitor and report any observed underperformance in real time or in a recurring report format. Assess soiling rates, DC health, inverter availability and efficiency, and other key metrics associated with site performance.		
	Daily	Integrate facility with CMMS system to track and manage all site activities related to equipment maintenance.		
	As needed	Implement a software system to manage equipment inventory inclusive of spare parts inventory, major equipment inventory (padmounts, substation equipment), inclusive of semi-annual inventory audits.		
Site Management and Personnel	Ongoing	Site to be staffed with technicians to complete visual inspections, planned maintenance, and support reactive maintenance on an asneeded basis.		
	As needed	Provide vehicles, safety equipment and tooling to onsite personnel.		
General Operations ¹	Per Manufacturer specifications and O&M Manual	Recurring inspections of facility and facility site, including the substation, breakers, padmount transformers, GSUs, capacitor banks (if applicable), all switches, SCADA System, electrical infrastructure, the modules, inverters, and trackers.		
	Per Manufacturer specifications and O&M Manual	Planned maintenance shall include racking system inspections, junction box, combiner box, perimeter fencing, roads, pest control, and erosion.		
	Per Manufacturer specifications	Inspect and test all safety equipment		
	Monthly; As needed	Monitor, troubleshoot, and review communications equipment, weather equipment and site control equipment.		
	As needed	Manage, review, and contract Subcontractor work, completion and warranty administration, coordinate and oversee all scheduled outages and Subcontractor interventions onsite		
	Ongoing	Compliance with Applicable Law.		
Warranty Administration	As needed	Identify, assess, document, and submit warranty claims with O&M.		
Road Maintenance	As needed	Repair roads to remediate excessive erosion, washout, and other damage.		
Safety	Ongoing	Prepare and enforce a safety program, to include relevant signage, safety attire, and site security.		



Operations and Maintenance June 12, 2023

Description	Frequency	Scope of Work	
	Periodic; Per Manufacturer specifications	Perform periodic site audits and inspect safety equipment.	
Emergency Response Plan	Ongoing	Prepare and implement an Emergency Response Plan (see Appendix D) that ensures the safety of project employees, emergency service providers, and the surrounding community in the event of an emergency. Emergency response measures are related to, but separate from, ongoing safety measures.	
Administrative Responsibilities	As needed	Prepare and complete filings related to NERC, ISOs, off-takers, local/state/federal permits, insurance, wildlife and environmental, and any other compliance related items.	
Preventative Maintenance and Balance of Plant ²			
Vegetation Management	As needed	Comply with the vegetation management plan outlining the expected frequency of mowing and spraying, and consistent with site safety procedures.	
Miscellaneous Balance of Plant Work	As needed	Coordinate and review of facility cleanliness.	
	As needed	Coordinate and contract road repairs and grading as a result of site activities or weather. Maintain safe site access.	
	As needed	Maintain internal and perimeter erosion control measures to ensure compliance with the project-specific SWPPP.	

Key:

CMMS = computerized maintenance management system

DC = direct current

SWPPP = Stormwater Pollution Prevention Plan

GSU = generator step-up transformers

ISO = independent system operator

NERC = North American Electric Reliability Corporation

OEM = original equipment manufacturer O&M = operations and maintenance

SCADA = supervisory control and data acquisition

Note

¹ The Projects are not expected to have an on-site O&M building. If a building is needed in the future to host technicians and spare parts, it may be a more centralized building for multiple Projects and would be permitted separately, if applicable.



² These items shall be performed according to O&M equipment manuals. Operator shall develop an O&M manual with recurring preventative maintenance activities. The O&M manual frequency of inspections and revisions will be at least as frequent as the O&M equipment manual requirements and include additional supplemental information.

Appendix A **Preliminary Site Layout** August 12, 2022

Appendix A PRELIMINARY SITE LAYOUT




LONE TREE PROJECT

Lone Tree, IOWA

SITE PLAN

Lone Tree Solar Project					
MW ac	MW dc	ratio	MWh/y	Capacity factor [%]	Acres
7,50	8,97	1,20	15338	23.35	50

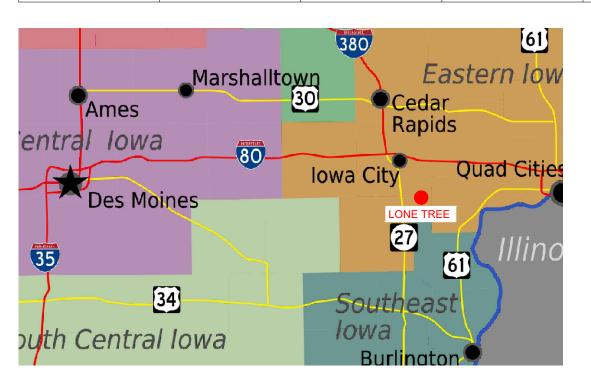





Contact Information				
Mariano Brandi	CEO	mbrandi@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en	
Cynthia Schuchner	Chief Construction and Engineering Officer	cschuchner@pcr.energy	PCR US Houston Office (832) 955 1979 — 1334 Brittmoore Rd, Suit 2407 Houston, TX 77043 — www.pcr.energy/en	


04						
03						
02						
01						
00	10	0/17/23	Preliminary			
Rev.	Date	(MM/DD/YY)		COMMENTS		
			REVISIO	ONS		
					₽ PCR	2
Proje	ect:	LONE TRE	E			
Sect	Sector: JOHNSON, IOWA, USA					
Own	ner: PCR INVESTMENTS SP2 LLC					
Title		SITE PLA	N		Sheet	01_08
Utilit	y:	CIPCO			Scale	Rev:
File:		Site Plan L	one Tree v11.dwg			
			∢			




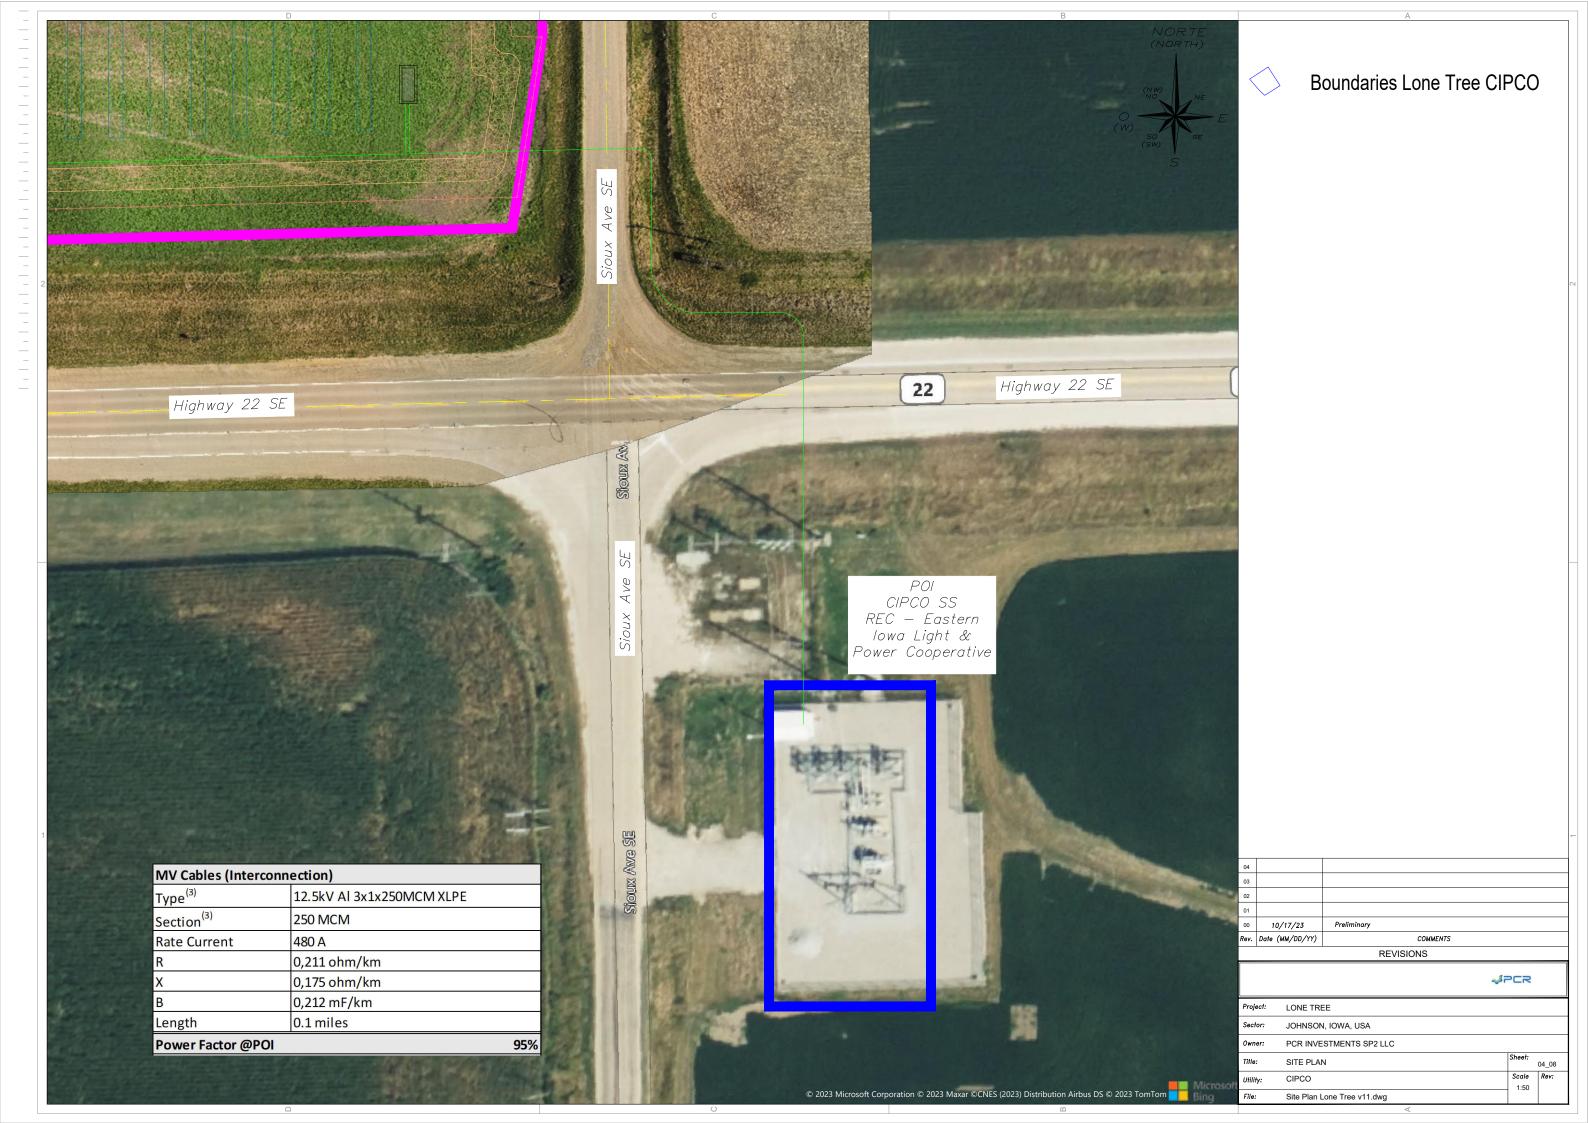

NORTE (NORTH) Angle min., * Angle max., ° Distribution, % Color 0.00 0.00 10.25 0.00 1.75 84.28 1.75 3.50 4.13 3.50 5.25 0.90 5.25 7.00 0.26 7.00 8.75 0.11 8.75 10.50 0.06 10.50 12.25 0.02 12.25 14.00 0.00 14.00 55.00 0.00 10/17/23 Rev. Date (MM/DD/YY) COMMENTS REVISIONS **₩**PCR Project: LONE TREE JOHNSON, IOWA, USA PCR INVESTMENTS SP2 LLC Sheet: ____05_08 SITE PLAN Scale Rev: 1" = 200' CIPCO Site Plan Lone Tree v11.dwg

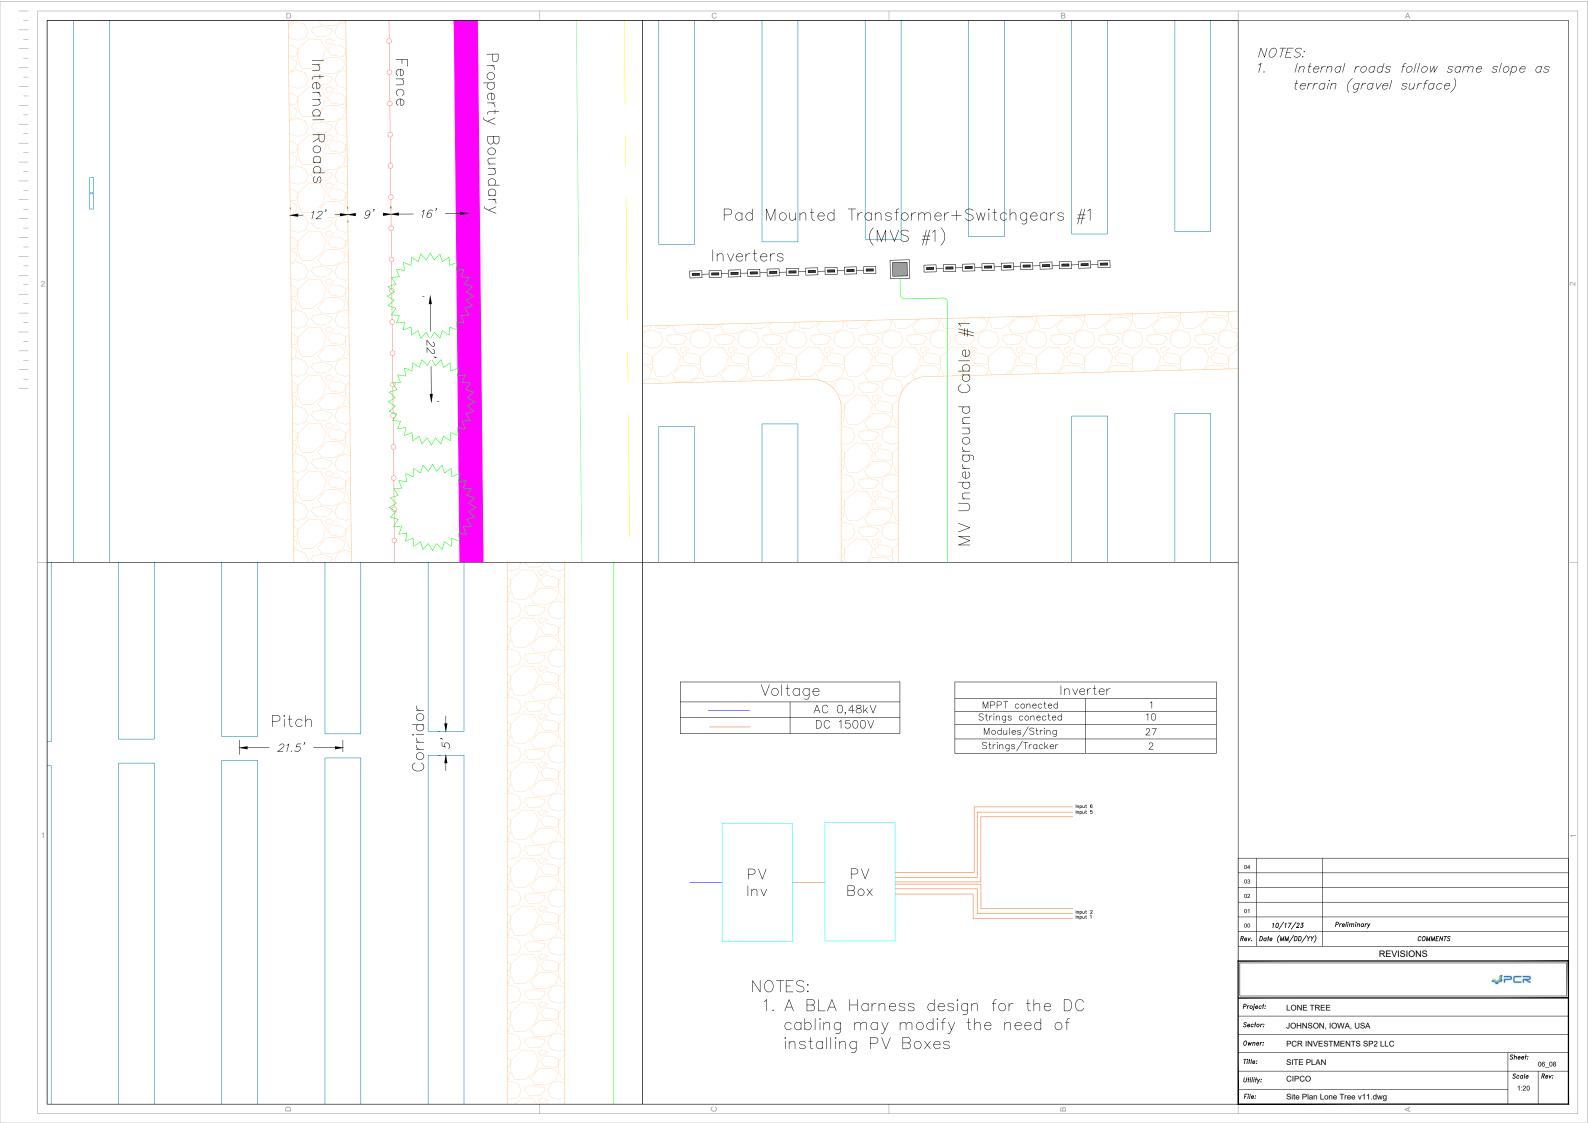

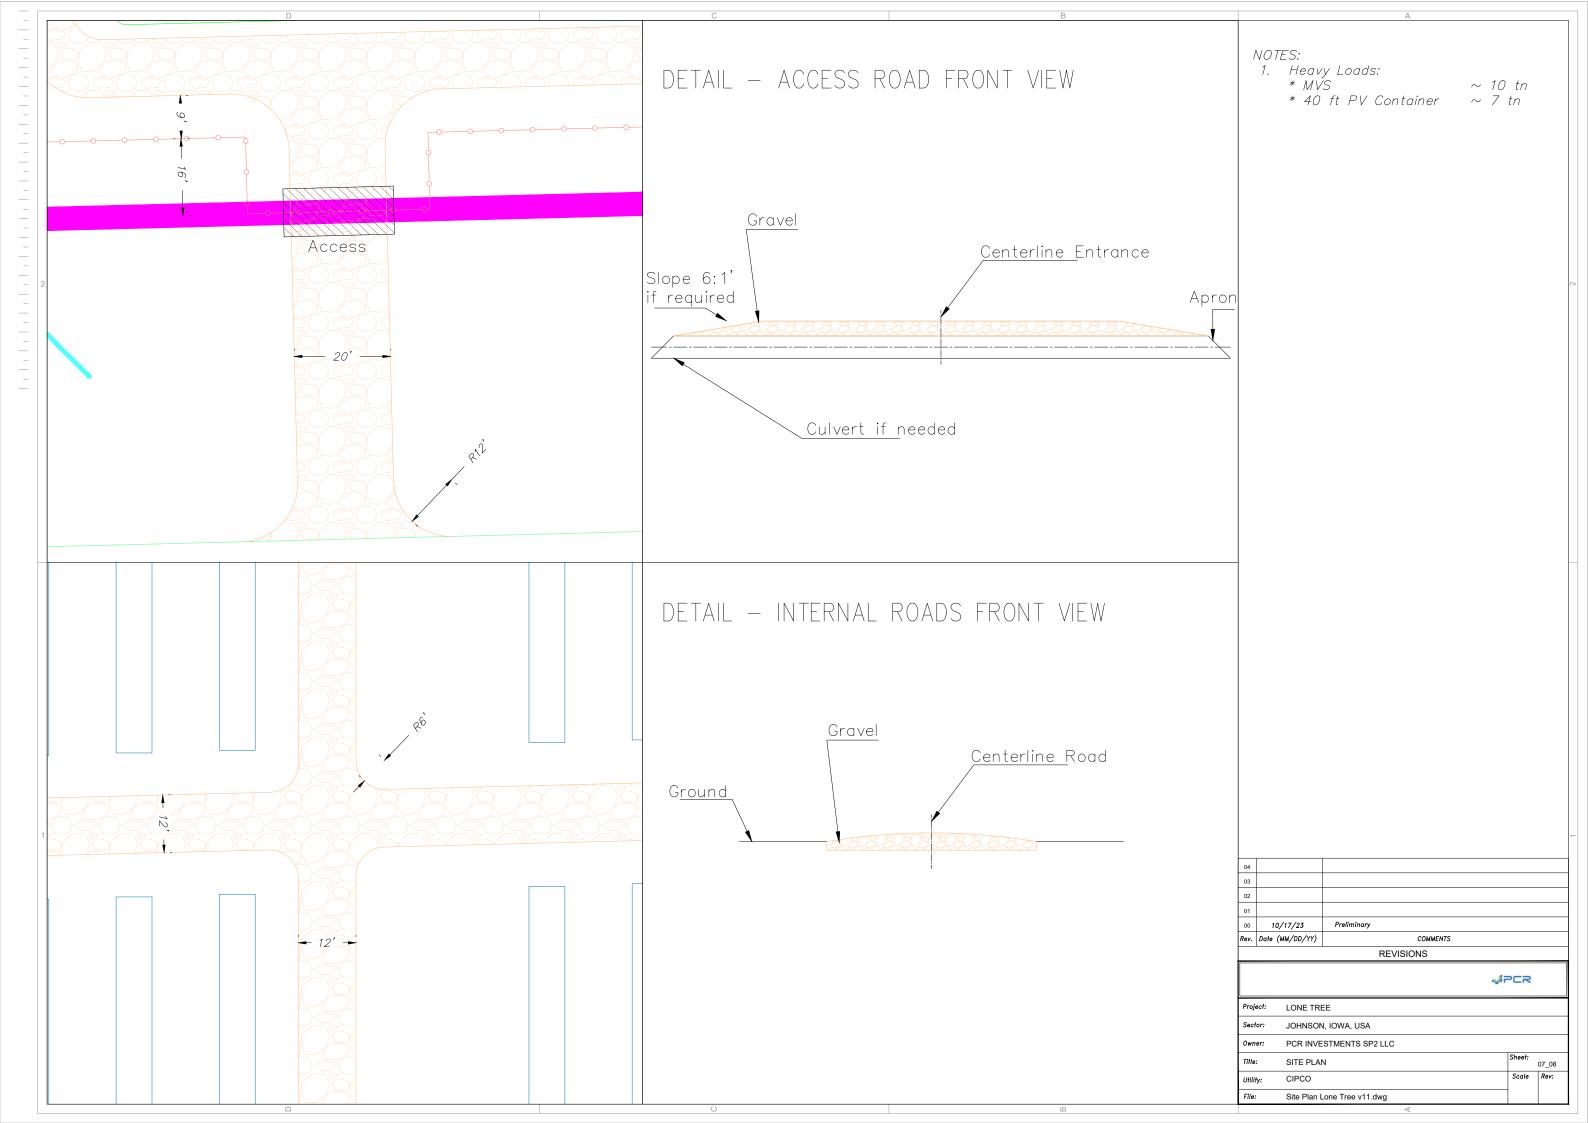

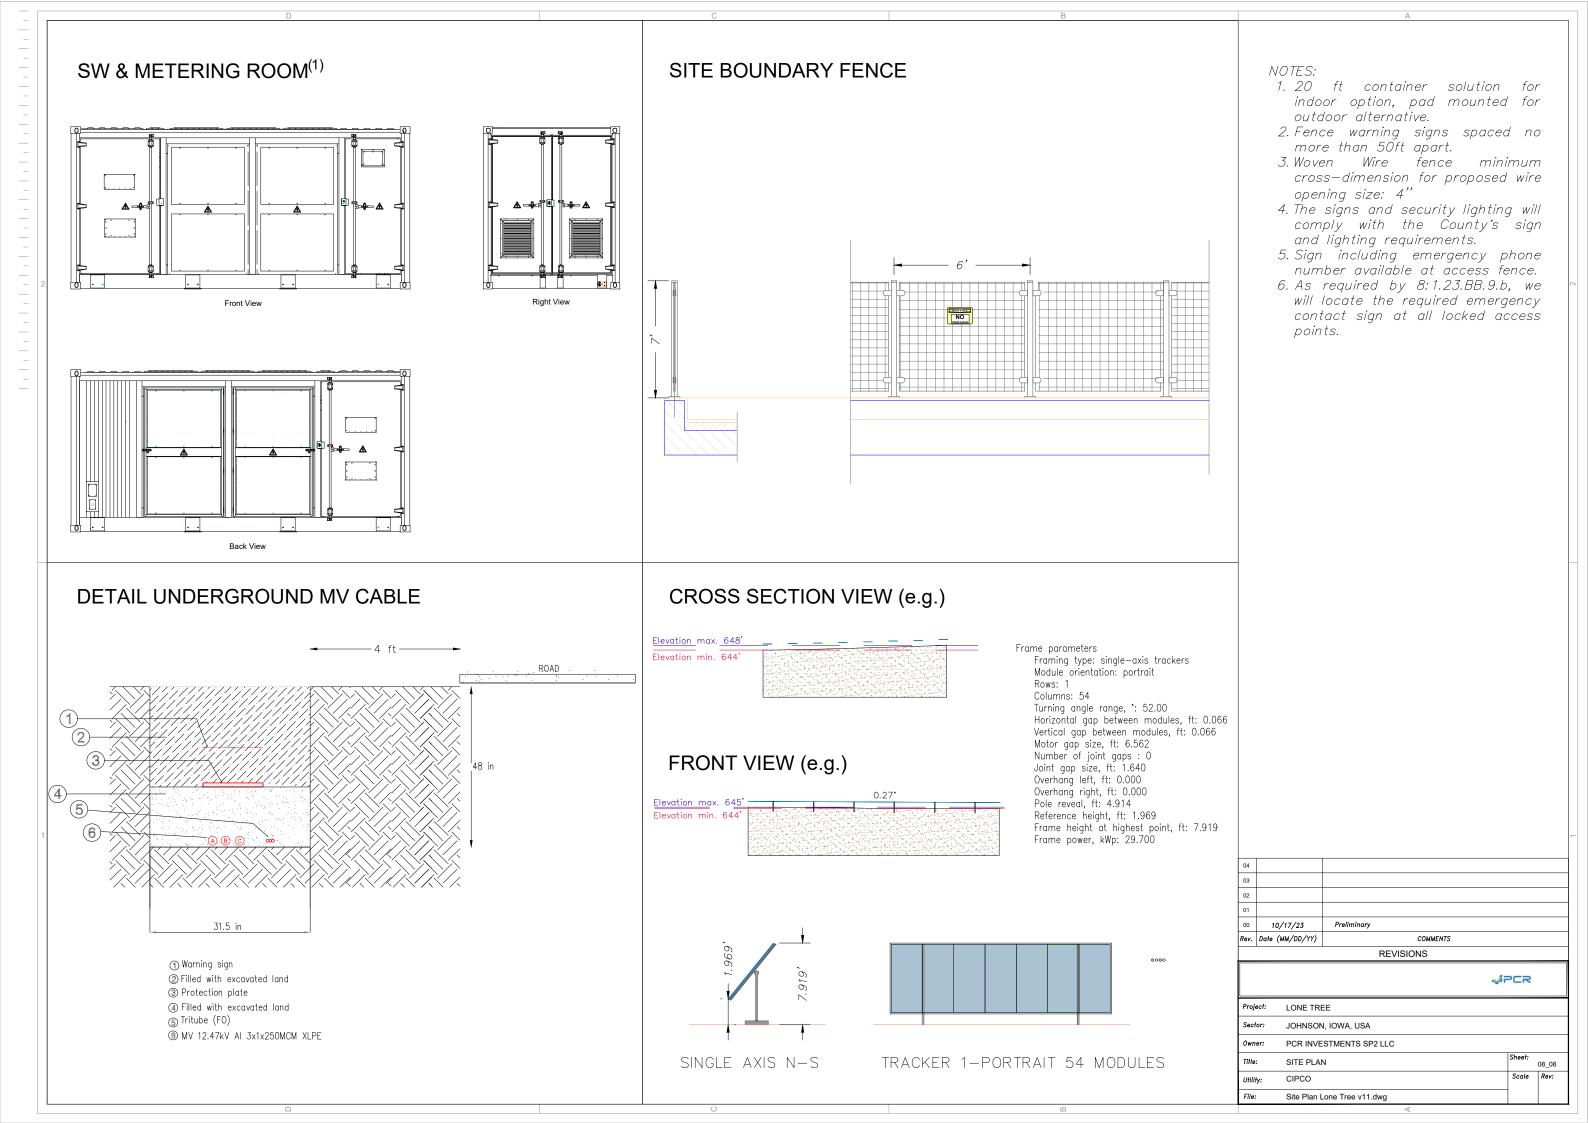



OPERATIONS AND MAINTENANCE PLAN

Appendix B **Stormwater Pollution Prevention** Plan August 12, 2022

Appendix B STORMWATER POLLUTION PREVENTION PLAN



OPERATIONS AND MAINTENANCE PLAN

Appendix C **Vegetation Management Plan** August 12, 2022

Appendix C VEGETATION MANAGEMENT PLAN



OPERATIONS AND MAINTENANCE PLAN

Appendix D **Emergency Response Plan** August 12, 2022

Appendix D EMERGENCY RESPONSE PLAN





LONE TREE SOLAR

Emergency Response Plan

Lone Tree Solar Johnson County, Iowa

Facility Operator:

PCR Investments SP2, LLC 1334 Brittmoore Rd, Suite 1327 Houston, TX 77043

July 2023

Contents

1.0	Purpose	1
2.0	General Facility Information	1
2.1	Shutoff Procedures and Locations	2
2.2	Operational Contacts	4
2.3	Emergency Contacts	4
3.0	General Safety and Operational Information	5
3.1	Precautions While in the Vicinity of the Solar Electric System	5
3.2	Training	6
4.0	Emergency Situations	6
4.1	Fire Response	8
4.2	Natural Emergency, Severe Weather	11
4.3	Physical Security	12
4.4	Cyber Security	13
4.5	Environmental Accident or Spill	14
4.6	Personnel Injuries and Serious Health Conditions	16
5.0	Public Safety	20
Table	es	
Table	First Responders and Emergency Services Contact Information	4
Table 2	2. Site Personnel Contact Information	6
Figui	res	
Figure	1. General Layout of Lone Tree Solar	3

1.0 Purpose

The Lone Tree Solar (Project) Emergency Response Plan (ERP) describes actions to ensure the safety of Project employees, emergency service members serving the Project, and the surrounding community in the event of an emergency.

2.0 General Facility Information

This ERP provides emergency personnel contact information and outlines procedures to prevent, mitigate, and effectively respond to an incident should one arise at the Project.

The Project is a 7.5-megawatt (MW) ground-mounted solar energy facility located 1.6 miles east of the town of Riverside along Highway 22 in Johnson County, Iowa. The Project is owned and operated by PCR Investments SP 2, LLC (Applicant), a wholly owned subsidiary of PCR Us Investments Corporation (PCR) located in Houston, Texas. PCR is committed to establishing and promoting a safety culture. PCR's historic safety record is a testament to the effectiveness of the safety policy and subsequent standard operational procedures established at each and every facility/project. The Applicant will effectively implement similar practices to ensure that safety and security risks remain minimal during construction and operation.

The Project consists of privately-owned parcels under lease agreement with the Applicant. The Project consists of approximately 16,308 photovoltaic (PV) panels oriented in linear rows spaced approximately 21.5 feet apart. Panels are connected by electrical cables hung on the underside of the panels or buried underground. "Blocks" of panels are connected to an inverter. There are 62 inverters overall that convert direct current (DC) electricity to alternating current (AC). The AC power is then routed via 12.5-kilovolt (kV) collector lines to the Project collection substation. Gravel roads are constructed throughout the Project to facilitate access for maintenance and repair. A Project overview is provided in Figure 1.

Lone Tree Solar will be monitored remotely via a Supervisory Control and Data Acquisition System (SCADA) that is compliant with the necessary North American Electric Reliability Corporation's (NERC's) Critical Infrastructure Protection (CIP) standards. All servers and firewalls are monitored 24 hours/day, 7 days/week by a Security Operations Center and all employees are required to complete training in information and security awareness. The Project will also have two to three individuals in the local area who will be accessing the site periodically for routine maintenance and to respond to any incidences that arise.

The Project panels are divided across 2 parcels. Panels can be accessed from Iowa Highway 22 (Figure 1). Each panel array area of the Project is enclosed by woven wire fencing with locking gates to ensure public safety. Gates are outfitted with a "Knox Box" type locking system to allow site access by emergency personnel. All gravel access roads have been designed to facilitate access throughout the Project. Roads are a minimum 14 feet wide and have occasional turnarounds with 35-foot radii to accommodate large truck movement (e.g., pumper or ladder type fire trucks). The 21-foot spacing between each row of panels can also provide access, if needed. In addition, there is a minimum 12-foot-wide clear path between the fence and panels to allow for additional vehicle access (e.g., pickup truck, all-terrain vehicle [ATV], etc.) throughout the site. Project Components, including fencing, inverters, energy storage system, access roads, and gates, are depicted in Figure 1.

2.1 Shutoff Procedures and Locations

Entry and shutdown of the Project should only be attempted at the direction of the Operator. In the event of an emergency requiring shutdown, power blocks within the solar arrays can be shut off by local personnel at each inverter. In an emergency, the ON/OFF switch on each inverter should be manually turned to the OFF position, shutting off both the AC and DC switches inside the inverter. After the system has been turned off, the DC Disconnect Switch should be turned off, and a lock should be placed on it to keep it from being re-energized. A schematic of these procedures will be displayed on each inverter.



Figure 1. General Layout of Lone Tree Solar

2.2 Operational Contacts

The following people are responsible for the operation, maintenance, and safety at the Lone Tree Solar Facility. The Operator conducts local monitoring of the site on a regular basis. As discussed above, the Operator has 24/7 remote monitoring capabilities from their central control center in lowa. Should issues arise, central control will dispatch local operations personnel to the site, as necessary. The appropriate PCR Energy Resources/Lone Tree Solar operational contact will be included in the final plan. Additional contacts that may require coordination regarding this plan and operation of the Project include the following departments and agencies.

2.3 Emergency Contacts

Table 1. First Responders and Emergency Services Contact Information

Department/Agency	Contact	Address
Lone Tree Volunteer Fire Department	Chief: <u>319- 629-4617</u>	201 West Commercial St. Lone Tree, Iowa 52755 319-648-3501
Riverside Fire Department	Chief: <u>319-653-2107</u>	271 River St. Riverside, Iowa 52327 319-653-2107
Johnson County Sheriff's Office	Sheriff: <u>319-356-6020</u>	511 S. Capitol St. lowa City, lowa 52244 319-356-6020, ext 2
Johnson County Emergency Management Department	Coordinator: <u>319-356-6700</u>	4529 Melrose Ave. Iowa City, Iowa 52246 319-356-6700
Iowa State Police, District 11, Area D	Public Resource Officer: 319-505-0153	5400 16 th Ave SW Cedar Rapids, Iowa 52404 319-396-1944
Johnson County Ambulance Service	Director: 319-688-5954 Assistant Director: 319-688-5955	808 S. Dubuque St., lowa City, lowa 52240. Field Supervisor: 319- 688-5957.
Johnson County Hazmat Team	Phone 319-356-6800 (Johnson County Joint Emergency Communication Center non- emergency dispatch number).	

In the event of an emergency dial 911

Emergency "911" calls in Johnson County are routed directly to a dispatch center in the County, where calls are sorted by type of emergency. Police-related calls are dispatched to either the Johnson County Sheriff's Office or the Iowa State Police District 11, Area D.

Non-emergency dispatch number for the Joint Emergency Communication Center (319-356-6800) as a general contact for other emergency issues that do not necessitate a 911 call.

3.0 General Safety and Operational Information

PV panels located throughout the Project convert sunlight to electricity. The process involves solid-state technology that consumes no materials and is completely self-contained. As such, the primary concern for first responders is exposure to electrical components that present a hazard to electric shock. During a response, it should be assumed that:

- All solar equipment on site contains lethal AC and DC voltages;
- Electricity is supplied from multiple sources;
- The site should only be accessed by personnel or emergency responders under the direction of the Operator; and

The following are the most hazardous locations within the Project:

- Inverters and disconnects;
- Vicinity of the solar electric PV system;
- Field wiring and all electrical boxes associated with the system; and
- Collection Substation.

3.1 Precautions While in the Vicinity of the Solar Electric System

- Only trained personnel should work near the arrays, modules, electrical boxes, or wiring.
- It is recommended to always have at least two persons present when working on the array
 or handling modules. Do not attempt to service or respond to an emergency unless
 another person capable of rendering first aid and cardiopulmonary resuscitation (CPR) is
 also present.
- Any accidents should be immediately reported to the Operator as soon as it is safe to do so.
- PV panels are made of glass and may break. If any cracks occur in the modules, touching
 a crack may expose a person to the full voltage and current of the array. Do not touch the
 modules without wearing electrical insulating gloves.

3.2 Training

Appropriate training of first responders is key to their understanding of the hazards that are present within the Project Area and to mitigate potential risks to their life during a response. As such, first responders that could be dispatched to the Project in the event of an emergency should be trained prior to the commencement of operation and on a periodic basis thereafter. The Operator will work with state and county officials, including the Johnson County Emergency Management Department, and local fire department(s), as appropriate, to provide training to emergency response leadership and their assigned staff.

Training for local emergency responders will be provided and/or made available for the first 5 years of operation, and thereafter, offered or provided if requested by the local EMA (no more than once annually). The appropriate Operator contact for training requests will be the Operations Manager, contact information for this person will be included in the final emergency response plan once that individual is identified.

Vandalism and theft are not common in this type of installation, so no special training is required.

4.0 Emergency Situations

Emergency situation critical points:

- In the event of an emergency, dial 911.
- Entry and shutdown of the Project should only be attempted at the direction of the Operator.
- Solar and substation components are always hot and should always be considered electrically energized (even at night, as there may be battery backup capabilities).

The following personnel will also be contacted in the event of an emergency; the specific contact information for which will be updated for the Final ERP.

Table 2. Site Personnel Contact Information

Title	Name	Office Phone	Cell Phone	Home Phone
Site Leader:	NAME To Be	PHONE	PHONE	PHONE
	Determined (TBD)	NUMBER TBD	NUMBER TBD	NUMBER TBD
Emergency	NAME TBD	PHONE	PHONE	PHONE
Coordinator:		NUMBER TBD	NUMBER TBD	NUMBER TBD
Operations	NAME TBD	PHONE	PHONE	PHONE
Center:		NUMBER TBD	NUMBER TBD	NUMBER TBD
Security Operations:	NAME TBD	PHONE NUMBER TBD	PHONE NUMBER TBD	PHONE NUMBER TBD

The public will be notified of all emergency situations, as appropriate, primarily through local emergency responders. In the event of an emergency that requires evacuation of adjacent landowners, local emergency responders and authorities will notify residents through means outlined by their agency or department. The local evacuation procedures are determined by each town and county.

Below is a list of contingencies that could constitute a safety or security emergency:

- Fire;
- Natural emergency, severe weather;
- Physical threat, security breach, crime;
- Cyber security;
- Environmental accident, spill; or
- Injuries and/or serious health conditions.

Below are brief descriptions of emergency response measures by each contingency category listed above. General emergency response measures listed below apply to all contingencies.

- It is the responsibility of the Site Leader to assess a developing emergency situation and initiate the appropriate actions in the ERP to protect personnel, the surrounding environment, and Project equipment from adverse damages.
- In the event of an emergency where personnel should be protected, call 911 immediately, and then contact (TBD) Operations Center.
- Based upon the type and extent of the emergency, the Site Leader should assess whether an evacuation should be initiated.
- If the Site Leader determines that a facility evacuation is necessary, he/she must determine which type of evacuation to direct (immediate or delayed).

4.1 Fire Response

This section describes measures taken at the Project Area to prevent, minimize the severity of, and proactively prepare for the event of a fire emergency.

In the event that a fire should occur at the facility, this section describes the actions that should be taken by Project personnel. Safe and expedient response actions are essential to protect the health and safety of personnel and the surrounding environment, and to minimize damage to Project equipment.

- 1. Any person who discovers a fire in the facility should immediately make radio contact with the Operator, and provide the following information:
 - a. That a fire has been discovered;
 - b. The location and source of the fire;
 - c. Any injuries that have occurred;
 - d. The cause of the fire (if known); and
 - e. Actions he/she will be taking to extinguish the fire (if appropriate).

Note: Notifying others of the emergency and getting trained responders on the way is the most important step in minimizing injuries to personnel and damage to equipment. In the event that the person discovering a fire would be significantly delayed in attempting to extinguish it in its incipient stage by first getting to a radio to report it, the priority would be to extinguish the fire in the incipient stage.

- Any person discovering a fire in its incipient stage should act as quickly as possible to extinguish the fire. In general, a fire should be in its incipient stage if it meets two primary criteria:
 - The fire can be extinguished or controlled with a single portable fire extinguisher;
 and
 - The person discovering the fire perceives an adequate level of safety in attempting to extinguish the fire.

- 3. As long as the fire is in its incipient stage, as defined above, the person discovering the fire should utilize all appropriate and readily available fire extinguishing equipment to extinguish the fire.
- 4. In response to the fire, the Site Leader will need to make the following determinations:
 - a. The equipment or activities that need to be shut down and/or ceased.
- 5. Site Control Room Operator or other person appointed by the person in charge will:
 - a. Shutdown equipment as instructed;
 - b. Announce the type and location of the emergency over the Public Address (P.A.) system or radio system;
 - c. Notify the Site Leader or other Person in Charge; and
 - d. Contact local emergency response services and provide the following information:
 - Type of emergency;
 - Magnitude and location;
 - Any immediate danger to people on or off site;
 - Any known injuries;
 - Any other pertinent information;
 - Contact the Operations Center;
 - Contact the System Operator or Transmission Operator if appropriate; and
 - Assign an individual to meet the emergency services at the gate in order to provide directions.
- 6. Site leader or other Person in Charge will:
 - a. Proceed to the fire area;
 - b. Determine the extent of the fire;
 - c. Determine the area to be isolated;
 - d. Determine if evacuation is necessary;

- e. Determine what equipment or activities will need to be shutdown and/or ceased; and
- f. Instruct the control room to notify the local emergency response services of the need for assistance if the fire has progressed or has the potential to progress beyond the incipient level.
- 7. Site personnel assigned to escort the emergency services:
 - a. Shall escort emergency service to the location of the fire. This individual may also be called on to provide emergency services with specific information about the dangers of Project equipment, chemicals nearby, electrical sources, etc.
 - b. NOTE: Having routine drills and regular site visits by local emergency services adds value for helping them become familiar with the site layout and the hazards associated at the site.
- 8. All other site personnel not directly involved with responding:
 - a. All other personnel that are not directly involved with responding to the fire shall report to their designated muster stations to ensure all persons are accounted for. These employees will remain at the muster stations until the "all clear" is received.

Upon arrival to the Project, responders shall:

- Evacuate and secure the area and keep people a minimum of 300 feet away, provided there are no immediate threats to people or non-solar property;
- Let the facility burn. Burning electrical equipment is already damaged and must be replaced;
- Manage adjacent areas, such as homes and forested areas, as needed, to limit the potential of the fire spreading; and
- If fire must be suppressed within the array fence line, the Operator will direct local authorities on how to proceed.

The following are the most important considerations when responding to a fire or other emergency at the Project:

- Solar and substation components are always hot and should always be considered electrically energized (even at night, as there may be battery backup capabilities);
- Identify and validate the hazard in order to minimize injury;
- Under the direction of the Operator, isolate or shutdown the electrical power at the site of the fire, if possible; and
- Leave the scene in a safe condition after mitigating hazards.
- 9. Local fire or County Emergency Management should contact in the event they want to request training beyond 5 years as provided in 8:1.23.BB.9.c

4.2 Natural Emergency, Severe Weather

Severe weather events such as snowstorms are possible at the Project. Although much less common, there is also the potential for minor earthquakes, tornadoes, flooding, hurricanes, or high wind events (e.g., microbursts). These events should have limited impact on the Project Area. The Project is designed and constructed to withstand the extreme weather likely to occur at the Project Area (e.g., high winds, hail, lightning, snowstorms, etc.).

Flooding waters, lightning, high winds and heavy rains may be detrimental to the employees, the environment and/or equipment and structures at the facility. Warnings about developing weather emergencies are issued by local radio stations or tracked by on-site weather systems. These warnings should provide adequate information of the approach of weather-related emergency conditions. The Site Leader at the facility has several means to monitor these weather-related emergencies. These include local radio stations and weather-related websites. After an extreme weather event, the Operator will evaluate all equipment for damages and repair, as necessary, to restore full Project operations. In addition to the general emergency response measures listed above, contingency-specific measures include:

- The Site Leader at the Project should monitor weather-related emergencies. Information
 and warnings are available via local radio, television, and internet weather and news sites
 and via OPERATIONS CENTER.
- When information is received that a severe weather watch or warning has been issued,

the Site Leader should notify their direct Manager and site employees.

- The Manager will determine if the site should be shut down due to the weather situation.
 When severe weather is forecast such as high winds associated with a hurricane, or other related conditions such as floods and/or storm surge, considerations for equipment shutdown should be taken consistent with the site's operating practices and plans that ensure safety considerations first.
- Site personnel should seek indoor shelter in a designated secure location, or other reinforced structure. Personnel should remain indoors if the severe weather is affecting the immediate area of the facility.
- The following list represents actions that should be taken at the Site for it to be secured.

 The listing is not intended to be all inclusive and will vary in applicability pending advance warning of the on-set of the event.
 - Evacuate open areas where solar racking or other conductive materials are located if lightning is in the area, or if there are other unsafe conditions that warrant construction activities to be unsafe;
 - Ensure Site personnel are safe and accounted for;
 - Seek safe shelter. If in your vehicle in winter, ensure survival kit and enough gas is in place;
 - o Ensure portable equipment, trash cans, tools, etc. are stored indoors; and
 - Ensure that construction trailers and storage containers are closed and latched.

The structure that holds the panels (trackers) is equipped with an automatic device that, in the event of severe storms with strong winds, orients the structure in order to minimize the impact and prevent any type of damage to the panels.

4.3 Physical Security

Physical security incidents can include the following: intrusion, bomb threats, sabotage, vandalism, terrorism, or other similar security events at an electrical generation facility. If a Hostile Intruder enters the Project, each person shall quickly determine the most reasonable way to protect his/her own life. Visitors and contractors are likely to follow the lead of employees and managers during a hostile intruder situation. In addition to the general emergency response measures, each person shall take the following actions, accordingly:

- Evacuate;
- Hide out;
- Take action (as last resort and only when your life is in imminent danger); and Call 911 when
 it is safe to do so.

In the event that the Project receives threatening correspondence either by phone or by other means of communications, the following actions should be performed immediately:

- Gather as much information as possible from the person making the threat;
- If the threat is via written correspondence, place the correspondence in a location in which it will not be touched or otherwise disturbed until police can be contacted; and
- If the threat is being made verbally (phone, or other), communicate and obtain information
 from the individual making the threat for as long as possible. For phone threats, note the
 time of the call, do not interrupt the caller and describe the tone of voice as well as any
 background sounds.

After information on the threat is gathered, inform the Site Leader, contact Security Operations at (PHONE NUMBER TBD), contact local law enforcement, as applicable (e.g., 911), then communicate the Physical Security Event to all on-site personnel.

4.4 Cyber Security

Site personnel may become aware of a cyber-incident or the potential for a cyber-incident from any of the following sources:

- A system page/email alert to an administrator/operator;
- OPERATIONS CENTER will release awareness notification via Operations Center (PHONE NUMBER TBD);
- An employee or Business Unit (BU) that first recognizes a potential incident that needs to be reported to Corporate Security or the IMSC;
- A BU designated to be contacted by an outside agency such as NERC, Federal Energy Regulatory Commission (FERC), SERC, or other outside source to the First Responder;
- A business partner;
- A manager;

- An outside source; or
- Notification may come as part of <u>PCR's Security Notifications and Event Reporting</u>
 Policy (NEE-SEC-1764 Security Notifications and Event Reporting to Corporate Security
 or System Operator). Site makes the unit safe or stabilizes the unit as needed, plans the
 recovery if appropriate.

The following actions shall be taken in the event that a cyber-incident is discovered:

- Site communicates to the appropriate parties:
 - Immediate Supervisor;
 - Corporate Security;
 - OPERATIONS CENTER;
 - Local Emergency Services, if appropriate; and/or
 - Transmission System Operator, if appropriate.
- The team restores the cyber assets affected by the incident to normal operations. This
 may require reloading data from backup tapes or reinstalling cyber assets from their
 original distribution media.
- Once the affected cyber assets have been restored, they are tested to make sure they are no longer vulnerable to the vulnerability that caused the incident.
- The impacted system(s) is/are tested to ensure they will function correctly when placed back in production.

4.5 Environmental Accident or Spill

The spill or release of any chemical/oil or Heat Transfer Fluid is a potentially serious event, and appropriate response actions must be taken to minimize health hazards to personnel, as well as potential impacts to the environment. It is the policy of the facility that personnel will not respond to spills/releases but will instead call for trained outside responders to perform this function. For the purpose of clarification to personnel, the term "respond" in this context refers to actions taken to perform cleanup operations of spilled substances, and in some cases may even take the meaning of actually stopping the source of a spill. Taking basic response actions to a spill such as setting up barricades, placing containment media and stopping spills in situations such as the Step 1 Example below should not be construed to be acting in the role of a "responder", as it is

defined in Occupational Safety and Health Administration (OSHA) Hazardous Waste Operations and Emergency Response (HAZWOPER) regulations.

The basic actions to be taken in response to a chemical or oil/Heat Transfer Fluid (HTF) spill or release are the following:

- If the spill or release is the direct result of an operational action performed on the system
 from which the release has originated, the person who performed the action should
 attempt to stop the release (if possible) if it can be stopped without incurring additional
 personal exposure to the substance.
- 2. The person discovering a spill/release should immediately move to a location that is a safe distance from the affected area.
 - If it is safe to do so under prevailing conditions, remain within observation distance;
 and
 - If safe conditions are in doubt, do not risk exposure leave the area immediately.
- 3. The person discovering the spill should look for other personnel in the area and warn them by any means available of the event that has occurred. The Site Leader should be notified immediately over the radio. Information provided should include all of the following that are known:
 - What type of chemical has been spilled/released;
 - The location(s) of the spill/release;
 - If the source of the spill/release has been stopped;
 - If any injuries or chemical exposure has occurred to personnel;
 - Boundaries describing the area of the spill;
 - Whether or not the spill is contained;
 - Quantity released (if it can be estimated); and
 - Environmental impacts (water bodies, streams, ground, roadways).
- 4. Based upon the report from the person discovering the spill, the Site Leader shall evaluate whether the circumstances pose a threat to the surrounding community or the environment.

5. If a threat is imposed to the community or environment, 911 should be notified immediately.

Personnel Injuries and Serious Health Conditions

The following sections provide basic guidelines for response actions to be taken in the event of

emergencies related to personnel health.

Although facility personnel should take the most aggressive response actions that are prudent in

an emergency situation, the first and foremost action will be to call 911 to initiate the response of

trained outside medical responders. Outside medical responders will not be asked to enter the

facility.

To prepare facility personnel for such contingencies, it will be the facility policy that all

operating personnel and as many other personnel as possible should be trained in

Cardiopulmonary Resuscitation (CPR), bloodborne pathogens, and in the use of an

Automated External Defibrillator (AED) if one is available.

Each site will maintain at least one well stocked first aid kit at the control house and one in each

site vehicle. These will be inspected at least monthly. Basic guidelines for response actions to

be taken in the event of personnel health can be found in the Emergency Action Plan. Each site

will determine the locations of their nearest non-emergency Worker's Compensation approved

medical facility as well as the Occupational Nurse and post the name, address and phone

number. In the event of an emergency, the 911 responders will determine the best location for

emergency care.

If present on site, the AED will be maintained at the facility at a designated location known and

accessible to all staff.

AED – PCR sites with AEDs will perform the following:

Notify the local Emergency Medical Services (EMS) of the existence, location, and type of

AED (California requirement only).

Test the AED every 6 months and after each use, per the manufacturer's requirements.

Inspect all AEDs at least every 90 days or per manufacturer's recommendations and

document the inspection; including verification the batteries and pads have not expired.

Maintain records of maintenance and testing.

Annually notify employees of location(s) of AEDs.

Provide information on how to take CPR or AED training.

- Annually demonstrate how to use an AED.
- Post instructions (14-point font) next to the unit on how to use the AED.

1. Basic First Response Actions

- a. Check for responsiveness. Responsiveness is when the person is able to respond when you call their name or touch them.
- b. If the person is unresponsive, immediately call 911 for outside medical assistance and ask other personnel to bring the AED (if present) to the scene.
 - 1.) Other personnel should assist with 911 notifications and expediting the delivery of the AED to the scene.
- c. Check to see if the victim is breathing normally.
 - 1.) If no signs of breathing are observed, the responder should check for visible signs of airway blockage.
 - If obvious signs of airway blockage are noticed, attempt to remove the blockage.
 - 2.) Initiate two rescue breaths into the victim.
 - 3.) After the rescue breaths, a pulse should be checked for on neck.
 - If a pulse is present, continue with recovery breathing, but do not initiate chest compressions.
 - ii. If no pulse is observed, commence CPR with assisted breathing.
- d. If CPR is being performed and the AED arrives to the scene, direct an assistant to begin setting up the AED for operation on the victim.
 - 1.) CPR should be continued during the time that the AED is being set up.
 - 2.) If the AED is placed into operation, remain near the victim and follow all AED instructions to ensure safety and proper victim monitoring. Maintain the victim with AED monitoring until trained medical responders arrive at the scene.

- e. If the victim is responsive but shows signs of shock or has an obvious severe injury, call 911 immediately and take additional actions as described in the sections below.
- f. If the victim has obvious broken bones or is bleeding profusely or may have neck or spine injuries, do not attempt to move the victim unless their immediate safety would be jeopardized by leaving them in that particular location. Make the victim as comfortable as possible and apply pressure to mitigate areas of profuse bleeding until trained medical personnel arrive at the scene.
- g. Immobilize all injured parts of the victim.
- h. Prepare victim for transportation if the victim can be safely moved.

2. Physical Shock

- a. Symptoms
 - 1.) Pallid face;
 - 2.) Cool and moist skin;
 - 3.) Shallow and irregular breathing;
 - 4.) Perspiration appearing on the victim's upper lip and forehead;
 - 5.) Increased, but faint pulse rate;
 - 6.) Nausea; and/or
 - 7.) Detached semi-conscious attitude towards what is occurring around him/her.

b. Treatment

- 1.) Request professional medical aid immediately; and
- 2.) Remain with and attempt to calm the victim.

3. Electric Shock

- a. Symptoms
 - 1.) Pale bluish skin that is clammy and mottled in appearance;
 - 2.) Unconsciousness; and/or

3). No indications that the victim is breathing.

b. Treatment

- 1.) Turn off electricity if possible;
- 2.) Call for professional medical assistance and an ambulance immediately;
- 3.) Remove electric contact from victim with non-conducting material; and
- 4.) Perform CPR and call for the AED, if required.

4. Burns

- a. Symptoms
 - 1.) Deep red color;
 - 2.) Blisters; and/or
 - 3.) Exposed flesh.

b. Treatment

- 1.) Cool victim immediately if at all possible;
- 2.) Free victim of any jewelry or metal if it is safe to remove it;
- 3.) Do not pull away clothing from burned skin tissue;
- 4.) Do not apply any ointment to burn area; and/or
- 5.) Seek professional medical assistance as soon as possible.

5. Heat Stroke

- a. Symptoms
 - 1.) Face will be red;
 - 2.) Face will be dry to the touch; and/or
 - 3.) The pulse will be extremely strong and fast.
- b. Treatment
 - 1.) Rapidly cool victim or death can occur;
 - 2.) Sponge victim with water;

- 3.) Fan victim to allow evaporation to occur; and
- 4.) Move victim into a cool environment.

6. Heat Exhaustion

- a. Symptoms
 - 1.) Increased heart rate;
 - 2.) Fatigue;
 - 3.) Impaired cognitive ability;
 - 4.) Lack of coordination;
 - 5.) Body temperature may be normal;
 - 6.) Clammy skin; and/or
 - 7.) Weakness and dizziness.
- b. Treatment
 - 1.) Remove victim from hot environment; and
 - 2.) Lay victim on their back with feet slightly elevated.

5.0 Public Safety

Access to the Project is limited to trained staff and maintenance personnel only.

Solar panel arrays are surrounded by 7-foot woven wire fence per requirements of the National Electric Safety Code (NESC).

In the event of personal injury occurs or if a person should become incapacitated while within the Project site, the following procedures should be followed:

1. Assess the area for hazards and secure the area to protect additional life from injury.

- 2. Notify the appropriate local authorities by dialing 911, and direct them to the Project access point identified on Figures 1 provided in this plan.
- 3. Local authorities should contact the Operator at the Operations Center (PHONE NUMBER TBD), available 24/7, to determine the appropriate response procedures and methods for shutting down the nearest components to ensure safe access.



Attachment H: Decommissioning Plan and Draft Performance Agreement

Decommissioning Plan Lone Tree Solar Project Johnson County, Iowa



Prepared for: PCR Investments SP 2, LLC

1334 Brittmoore Rd Suite 1327 Houston, Texas, 77043

Prepared by: Stantec Consulting Services Inc. 1165 Scheuring Road De Pere, Wisconsin 54115

Project No: 193709077 March 21, 2023

Revised June 15, 2023

DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

This document entitled Decommissioning Plan – Lone Tree Solar Project, Johnson County, Iowa, was prepared by Stantec Consulting Services Inc. ("Stantec") for the use of PCR Investments SP2, LLC (the "Client"). The material in this document reflects Stantec's professional judgment in light of the scope, schedule and other limitations stated in the document and in the contract between Stantec and the Client. The opinions in this document are based on conditions and information existing at the time this document was published and do not take into account any subsequent changes. In preparing the document, Stantec did not verify information supplied to it by others.

(signature

JoAnne J. Blank Senior Associate

(signature)

Matthew A Clementi, PE Senior Engineer

(signature)

Jason Schneider, PE, PMP, CFM Senior Associate, Project Manager

PE Certification


Name: Jason T. Schneider

Title: Senior Associate, Project Manager

Company: Stantec Consulting Services Inc.

Registration No: 21004

State: lowa





i

Table of Contents

1.0	INTRODUCTION	1
1.1	SOLAR FARM COMPONENTS	
1.2	TRIGGERING EVENTS AND EXPECTED LIFETIME OF PROJECT	
1.3	DECOMMISSIONING SEQUENCE	2
2.0	PROJECT COMPONENTS AND DECOMMISSIONING ACTIVITIES	4
2.1	OVERVIEW OF SOLAR FACILITY SYSTEM	
2.2	SOLAR MODULES	
2.3	TRACKING SYSTEM AND SUPPORT	
2.4	INVERTERS AND TRANSFORMER STATIONS	
2.5	ELECTRICAL CABLING AND CONDUITS	
2.6	PROJECT BELOW GROUND INTERCONNECTION LINE	
2.7	SWITCHGEAR STURCTURE	
2.8	PERIMETER FENCING, SITE ACCESS AND INTERNAL ROADS	<i>.</i>
3.0	LAND USE AND ENVIRONMENT	ε
3.1	LAND USE	8
3.2	RESTORATION AND REVEGETATION	
3.3	SURFACE WATER DRAINAGE AND CONTROL	
3.4	MAJOR EQUIPMENT REQUIRED FOR DECOMMISSIONING	8
4.0	DECOMMISSIONING COST ESTIMATE SUMMARY	10
4.1	DECOMMISSIONING EXPENSES	10
4.2	POTENTIAL DECOMMISSIONING REVENUES	
4.3	DECOMMISSIONING COST SUMMARY AND FINANCIAL ASSURANCE	12
LIST (OF TABLES	
Table	e 1 Primary Components of Solar Farm to be Decommissioned	∠
Table	e 2 Typical Access Road Construction Materials	
	e 3 Estimated Decommissioning Expenses	
	e 4 Estimated Decommissioning Revenues	
Table	e 5 Decommissioning Summary	12

LIST OF FIGURES

Figure 1 Project Layout



intec ii

1.0 INTRODUCTION

PCR Investments SP2, LLC (PCR) is proposing to construct the Lone Tree Solar Project in Johnson County, Iowa. The proposed Lone Tree Solar Project (Lone Tree or "the Project") is to be located northwest of the city of Lone Tree, Iowa. Major components of the Project include bi-facial solar modules, a tracking system, inverter/transformer stations, access roads, and below ground interconnection cable. The Project will occupy approximately 50 acres of land (within perimeter fencing) and will have a maximum nameplate generating capacity of up to 7.5 megawatts (MW) alternating current (AC).

This Decommissioning Plan (Plan) provides a description of the decommissioning and restoration phase of the Project. Construction is anticipated to begin approximately 12 months after receipt of the required Johnson County permit approval. Construction of the Project is anticipated to take approximately 8 months, with the Commercial Operation Date (COD) to follow. The decommissioning phase is assumed to include the removal of Project facilities as listed in Section 1.1 and shown in Figure 1.

This Plan includes an overview of the primary decommissioning Project activities, including the dismantling and removal of facilities, and subsequent restoration of land. A summary of estimated costs and revenues associated with decommissioning the Project are included in Section 4.0. The summary statistics and estimates provided are based on a 7.5-MW_[AC] Project array design.

1.1 SOLAR FARM COMPONENTS

The main components of the Project include:

- Solar modules and associated above ground cabling
- Tracking system and steel piles
- In-string inverters
- Transformers stations
- Site access and internal roads
- Perimeter fencing
- Below ground electrical cabling and conduits
- Switchgear structure
- Below ground cabling to point of interconnection (POI)

1.2 TRIGGERING EVENTS AND EXPECTED LIFETIME OF PROJECT

Project decommissioning may be triggered by events such as the end of a power purchase agreement or when the Project reaches the end of its operational life. Per Johnson County (County) Zoning Ordinance No. 08-24-21-02 and 05-19-22-01 (amendments), Article 8:1.23.BB.10 - following a continuous one-year period in which no electricity is generated, or if substantial action on construction or repairs to the project is



discontinued for a period of one year, the permit holder will have one year to complete decommissioning of the utility scale solar installation. At the discretion of the County Zoning Administrator, the continuous one-year period that triggers decommissioning may be extended if the applicant demonstrates ongoing commitment to the project through activities such as but not limited to making lease payments or documentation of ongoing maintenance or repairs. Decommissioning shall be completed in accordance with the approved decommissioning plan. The landowner or tenant must notify the County Zoning Administrator when the project is discontinued and when decommissioning is complete.

If properly maintained, the expected lifetime of a utility-scale solar panel is approximately 30 to 35 years with an opportunity for a project lifetime of 50 years or more with equipment replacement and repowering. Depending on market conditions and project viability, solar arrays may be retrofitted with updated components (e.g., panels, frame, tracking system, etc.) to extend the life of a project. In the event that the modules are not retrofitted, or at the end of the Project's useful life, the panels and associated components will be decommissioned and removed from the Project site.

The value of the individual components of the solar facility will vary with time. In general, the highest component value would be expected at the time of construction with declining value over the life of the Project. Over most of the life of the Project, components such as the solar panels could be sold in the wholesale market for reuse or refurbishment. As efficiency and power production of the panels decrease due to aging and/or weathering, the resale value will decline accordingly. Secondary markets for used solar components include other utility scale solar facilities with similar designs that may require replacement equipment due to damage or normal wear over time; or other buyers (e.g., developers, consumers) that are willing to accept a slightly lower power output in return for a significantly lower price point when compared to new equipment.

Components of the solar facility that have resale value may be sold in the wholesale market. Components with no wholesale value will be salvaged and sold as scrap for recycling or disposed of at an approved offsite licensed solid waste disposal facility (landfill). Decommissioning activities will include removal of the arrays and associated components as listed in Section 1.1 and described in Section 2.

1.3 DECOMMISSIONING SEQUENCE

Decommissioning activities are anticipated to begin within six (6) months of the Project ceasing operation and will be completed within twelve (12) months from the time the Project ceased operation. Monitoring and site restoration may extend beyond this period to ensure successful revegetation and rehabilitation. The anticipated sequence of decommissioning and removal is described below; however, overlap of activities is expected.

- Reinforce access roads, if needed, and prepare site for component removal
- Install temporary fencing and erosion control best management practices (BMPs) to protect sensitive resources



DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

- De-energize solar arrays
- Dismantle panels and above ground wiring
- Remove module trackers and piles
- Remove inverters
- Remove transformers and skids
- Remove below-ground medium voltage and interconnection electrical cables and conduit (less than 48 inches in depth)
- Remove switchgear structure
- Remove access and internal roads and complete minor grading as required to re-establish overall drainage patterns similar to pre-development conditions
- De-compact subsoils (if required), restore and revegetate disturbed land to allow for pre-construction land use to the extent practicable



tec 3

2.0 PROJECT COMPONENTS AND DECOMMISSIONING ACTIVITIES

The solar facility components and decommissioning activities necessary to restore the Project area, as near as practicable, to pre-construction conditions are described within this section.

2.1 OVERVIEW OF SOLAR FACILITY SYSTEM

PCR anticipates utilizing approximately 16,308 solar modules, with a total nameplate generating capacity of up to 8.97 MW direct current (DC) converting to approximately 7.50 $MW_{[AC]}$ on the approximately 50-acre site. Statistics and cost estimates provided in this Plan are based on a bifacial solar module although the final panel manufacturer has not been selected at the time of this report.

Above ground facilities, such as modules, trackers, foundations, steel piles, electrical cabling and conduit will be removed from the site. Electrical cabling greater than 48 inches in depth may be abandoned in place. Access roads may be left in place if requested and/or agreed to by the landowner. Public roads damaged or modified during the decommissioning and reclamation process will be repaired to the predecommissioning condition at PCR's expense.

Estimated quantities of materials to be removed and salvaged or disposed of are included in this section. Most of the materials described have salvage value, although there are some components that will likely have none at the time of decommissioning. All recyclable materials, salvaged and non-salvage, will be recycled to the extent possible. All other non-recyclable waste materials will be disposed of in accordance with state and federal law in a licensed solid waste facility. Table 1 presents a summary of the primary components of the Project included in this decommissioning plan.

Table 1 Primary Components of Solar Farm to be Decommissioned

Component	Quantity	Unit of Measure
Solar Modules (approximate)	16,308	Each
Tracking System (equivalent trackers – 56 modules)	302	Equivalent Trackers
Steel Piles	2,780	Each
Inverters (within arrays)	62	Each
Transformer Stations (on skids and piles)	3	Each
Electrical Cables and Conduits (greater than 48-inches below ground abandoned in place)	1,813	Lineal Foot (estimated)
Perimeter Fencing	5,909	Lineal Foot (estimated)
Internal Access Roads (approximate)	7,914	Lineal Foot (estimated)



Component	Quantity	Unit of Measure
Switchgear Structure	1	Each
Below Ground Interconnection Cable (greater than 48-inches below ground abandoned in place)	512	Lineal Feet (estimated)

2.2 SOLAR MODULES

PCR is considering a 555-watt bi-facial module, such as those manufactured by ZNSHINE Solar or similar type of model for the Project. The ZNSHINE Solar module has been used as a representative module for the calculations in this Plan. Each module assembly (with frame) has a total weight of approximately 71. pounds. The modules are approximately 89.7 inches long and 44.6 inches in width and are mainly comprised of non-metallic materials such as silicon, mono- or poly-crystalline glass, plastic, and epoxies, with an anodized aluminum frame.

At the time of decommissioning, module components in working condition may be refurbished and sold in a secondary market yielding greater revenue than selling as salvage material.

2.3 TRACKING SYSTEM AND SUPPORT

The solar modules will be mounted on a one-in-portrait tracking system, such as the Omco Origin tracker manufactured by Omco Solar or a similar manufacturer. Each tracker is approximately 64.3 meters (211 feet) in length and will support 54 solar modules. Smaller trackers may be employed at the edges of the layout to efficiently utilize available space. The tracking system is mainly comprised of galvanized and stainless steel; steel piles that support the system are comprised of structural steel.

The solar arrays will be deactivated from the surrounding electrical system and made safe for disassembly. Electronic components, and internal electrical wiring will be removed and salvaged. The steel piles will be completely removed.

The supports, tracking system, and piles contain salvageable materials which will be sold to provide revenue to offset decommissioning costs.

2.4 INVERTERS AND TRANSFORMER STATIONS

PCR is proposing to use the SMA Solar Sunny Highpower PEAK3 or similar inverters, which will be mounted on a racking system located with transformers in two central locations within the solar array. The transformers typically sit on a skid assembly mounted on steel pile foundations within the array. The inverters, transformers, and associated equipment will be deactivated, disassembled, and removed. Depending on condition, the equipment may be sold for refurbishment and re-use. If not re-used, they will be salvaged



or disposed of at an approved solid waste management facility. All oils and lubricants will be collected and disposed of at a licensed facility.

2.5 ELECTRICAL CABLING AND CONDUITS

The Project's underground electrical collection system will be placed at a minimum depth of approximately four (4) feet (48 inches) unless a greater depth is required by a landowner. Cabling installed below four feet will not interfere with future land use and can be abandoned in place. For purposes of this Plan, it is assumed that all cabling and conduit located at a depth greater than four feet below the surface will be abandoned in place.

2.6 PROJECT BELOW GROUND INTERCONNECTION LINE

No project-specific substation will be needed for the Project. The Project will utilize approximately 512 feet (0.1 mile) of 12.5kV below ground cable to connect to the POI. The interconnection cable will be placed at a minimum depth of approximately four (4) feet (48 inches) unless a greater depth is required by a landowner or jurisdiction.

Cabling installed below four feet will not interfere with future land use and can be abandoned in place. For purposes of this Plan, it is assumed that interconnection line located at a depth greater than four feet below the surface will be abandoned in place.

2.7 SWITCHGEAR STURCTURE

PCR will utilize one switchgear room to be located in the south-central portion of the Project area. The structure will be in conformance with all local and state building codes and will be removed during the decommissioning process.

2.8 PERIMETER FENCING, SITE ACCESS AND INTERNAL ROADS

The Project will include an approximately seven-foot-high woven wire fence surrounding the perimeter of the site.

A network of access roads will allow access to solar facility equipment. The internal access roads will be composed of gravel approximately 12 feet wide and totaling approximately 7,914 feet (1.5 miles) in length. The internal access road lengths may change with final Project design. To be conservative, the decommissioning estimate assumes that all internal access roads will be completely removed.

Access roads located around the perimeter and/or within the array will be comprised of an eight-inch-thick gravel layer placed on compacted native soils. The estimated quantity of the material is provided in Table 2.



DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

Table 2 Typical Access Road Construction Materials

Item	Quantity	Unit
Gravel or granular fill; eight-inch thick	2,340	Cubic Yards

Decommissioning activities include the removal and stockpiling of aggregate materials on site for salvage preparation. It is conservatively assumed that all aggregate materials will be removed from the Project site and hauled up to five (5) miles from the Project area. Following removal of aggregate, the access road areas will be graded, decompacted with deep ripper or chisel plow (ripped to 18 inches), backfilled with native subsoil and topsoil, as needed, and graded as required to re-establish overall drainage patterns similar to pre-development conditions.



3.0 LAND USE AND ENVIRONMENT

3.1 LAND USE

Land use prior to proposed development is primarily agricultural. The areas of the Project that have been disturbed will be restored, as near as practicable, to their preconstruction condition and allow for similar land use. Topsoil, reserved during construction will be used if available and supplemented with comparable soils. Restored areas will be revegetated in compliance with regulations in place at the time of decommissioning.

3.2 RESTORATION AND REVEGETATION

Portions of the Project site that have been excavated and backfilled will be restored, as near as practicable, to pre-construction conditions. Soils compacted during deconstruction activities will be de-compacted, as necessary, to restore the land to a condition suitable for pre-construction land use. Topsoil will be placed on disturbed areas, as needed, and seeded with appropriate vegetation in coordination with landowners.

3.3 SURFACE WATER DRAINAGE AND CONTROL

As previously described, the proposed Project area is predominantly located on agricultural land. The terrain is relatively flat. The Project facilities are being sited to avoid wetlands, waterways, and drainage features to the extent practicable.

Surface water conditions at the Project site will be reassessed prior to the decommissioning phase. PCR will obtain the required water quality permits from the lowa Department of Natural Resources (IDNR) and the U.S. Army Corps of Engineers (USACE), as needed, prior to decommissioning the Project. Required construction stormwater permits will also be obtained, and a Stormwater Pollution Prevention Plan (SWPPP) prepared describing the protection needed to reflect conditions present at the time of decommissioning. Erosion control best management practices may include: construction entrances, temporary seeding, permanent seeding, mulching (in non-agricultural areas), erosion control matting, silt fence, filter berms, and filter socks.

3.4 MAJOR EQUIPMENT REQUIRED FOR DECOMMISSIONING

The activities involved in decommissioning the Project include removal of the Project components: solar modules, tracking system, foundations and piles, inverters, transformers, access roads, and electrical cabling and conduits (unless abandoned below ground). Restoration activities include back-filling of pile and foundation sites; decompaction of subsoils; grading of surfaces to pre-construction land contours and revegetation of the disturbed areas.

Equipment required for the decommissioning activities is similar to what is needed to construct the solar facility and may include, but is not limited to: small cranes, low ground



DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

pressure (LGP) track mounted excavators, backhoes, LGP track bulldozers and dump trucks, front-end loaders, deep rippers, water trucks, disc plows and tractors to restore subgrade conditions, and ancillary equipment. Standard dump trucks may be used to transport material removed from the site to disposal facilities and to import clean fill and topsoil if necessary.

PCR acknowledges that Johnson County Regulations may require the site owner/operator to enter into a Public Roads Damage Avoidance and Mitigation Plan with the County prior to the start of decommissioning activities if decommissioning will utilize County roads.



itec 9

4.0 DECOMMISSIONING COST ESTIMATE SUMMARY

Expenses associated with decommissioning the Project will be dependent on labor costs at the time of decommissioning. For the purposes of this report, 2022 average market values were used to estimate labor expenses. Fluctuation and inflation of the labor costs were not factored into the estimates.

4.1 DECOMMISSIONING EXPENSES

During decommissioning, the Project will incur costs associated with disposal of components not sold for salvage, including materials which will be disposed of at a licensed facility, as required. Decommissioning costs also include backfilling, grading, and restoration of the proposed Project site as described in Section 2. Table 3 summarizes the estimated costs for activities associated with the major components of the Project.

Table 3 Estimated Decommissioning Expenses

Activity	Unit	Number	Cost per Unit	Total
Overhead and management (includes estimated permitting required)	Lump Sum	1	\$37,000	\$37,000
Solar modules; disassembly and removal	Each	16,308	\$4.60	\$75,017
Tracking system disassembly and removal (equivalent tracker)	Each	302	\$400	\$120,800
Steel pile/post removal	Each	2,780	\$9.70	\$26,966
Inverters (in-string)	Each	62	\$300	\$18,600
Transformer stations	Each	3	\$1,100	\$3,300
Access road excavation and removal	Lump Sum	1	\$10,350	\$10,350
Perimeter fence removal	Lineal Foot	5,909	\$2.80	\$16,545
Topsoil replacement and rehabilitation of site	Lump Sum	1	98,050	\$98,050
Switchgear structure	Lump Sum	1	\$5,000	\$5,000
Total Estimated Decommissioning Cost	\$411,628			

4.2 POTENTIAL DECOMMISSIONING REVENUES

A summary of potential revenue to be realized from resale or salvage of the facilities is included in this report. PCR acknowledges that Johnson County does not allow the recognition of revenue due to salvage value to be considered in the final financial



DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

security for decommissioning. The estimated resale or salvage value is described in this report to provide information regarding the potential revenue available upon decommissioning.

As previously described, the value of the decommissioned components will be higher in the early stages of the Project and decline over time. Resale of components such as solar panels is expected to be greater than salvage (i.e., scrap) value for most of the life of the Project, as described below. For purposes of this report, only estimated salvage values were considered in net revenue calculations, as this is the more conservative estimate strategy.

Modules and other solar plant components can be sold within a secondary market for re-use. A current sampling of reused solar panels indicates a wide range of pricing depending on age and condition (\$0.10 to \$0.30 per watt). Future pricing of solar panels is difficult to predict at this time, due to the relatively young age of the market, changes to solar panel technology, and the ever-increasing product demand. A conservative estimation of the value of solar panels at \$0.10 per watt would yield approximately \$897,000. Increased costs of removal, for resale versus salvage, would be expected in order to preserve the integrity of the panels; however, the net revenue would be substantially higher than the estimated salvage value.

The resale value of components such as trackers, may decline more quickly; however, the salvage value of the steel that makes up a large portion of the trackers is expected to stay at or above the value used in this report.

The market value of steel and other materials fluctuates daily and has varied widely over the past five (5) years. Salvage value estimates were based on an approximate five-year-average price of steel and copper derived from sources including on-line recycling companies and United States Geological Survey (USGS) commodity summaries. The price used to value the steel used in this report is \$241 per metric ton; aluminum at \$0.40 per pound; silicon at \$0.40 per pound and glass at \$0.05 per pound.

The main material of the tracking system and piles is assumed to be salvageable steel. The main components of the solar modules are glass and silicon with aluminum framing. A 50 percent recovery rate was assumed for all panel components, due to the processing required to separate the panel components. Alternative and more efficient methods of recycling solar panels are anticipated before this Project is decommissioned, given the large number of solar facilities that are currently being developed. Table 4 summarizes the potential salvage value for the solar array components and construction materials.



Table 4 Estimated Decommissioning Revenues

Item	Unit of Measure- ment	Quantity per Unit	Salvage Price per Unit	Total Salvage Price per Item	Number of Items	Total
Panels – Silicon	Pounds per Panel	1.8	\$0.40	\$0.72	16,308	\$11,742
Panels – Aluminum	Pounds per Panel	2.9	\$0.40	\$1.16	16,308	\$18,917
Panels – Glass	Pounds per Panel	26.8	\$0.05	\$1.34	16,308	\$21,853
Tracking System and Posts	Metric tons per MW _[DC]	32.0	\$241	\$7,712	8.97	\$69,177
Total Potential Revenue					\$121,689	

^{*} Revenue based on salvage value only. Revenue from used panels at \$0.10 per watt could raise \$897,000 as resale versus the estimated salvage revenue.

4.3 DECOMMISSIONING COST SUMMARY AND FINANCIAL ASSURANCE

Table 5 provides a summary of the estimated net cost to decommission the Project, using the information detailed in Section 4.1. Estimates are based on 2022 prices, with no market fluctuations or inflation considered. Table 5 provides the total estimated decommissioning cost without reductions based on salvage value.

Table 5 Decommissioning Summary

Item	Cost
Decommissioning Expenses	\$411,628
Gross Decommissioning Cost with 10 Percent Contingency, per Ordinance (i.e., \$411,628 X 110%)	\$452,791

PCR has indicated that, in compliance with the Johnson County Zoning Ordinance, Article 8:1.23.BB.10, they shall provide to the County a Performance Agreement and accompanying financial surety instrument to cover the cost of decommissioning in accordance with the following as stated in the ordinance:

- The applicant shall provide estimates for the total cost for decommissioning the site as determined by a Licensed Engineer. Decommissioning costs shall not take salvage value into account.
- Decommissioning funds shall be an amount equal to the total costs for decommissioning the site, plus a ten percent (10%) contingency.



- Decommissioning funds shall be maintained in the form of cash, certificate of deposit, performance bond, escrow account, surety bond, letter of credit, or other form of financial assurance as agreed to by the approving authority. Any financial document evidencing the maintenance of the decommissioning funds shall include provisions for releasing the funds to the County in the event decommissioning is not completed in a timely manner.
- Prior to any ground disturbance, grading or construction activity on the site, fifty percent (50%) of total estimated decommissioning costs shall be provided by any of the means listed above. An additional twenty five percent (25%) shall be provided within five (5) years of the date of initial approval, and the remaining twenty five percent (25%) of the total re-estimated decommissioning costs shall be provided within eleven (11) years of the date of initial approval. From that point forward, 100% of the total estimated decommissioning costs as determined by the most recent re-estimation shall be maintained in the decommissioning fund until the end of the functional life of the project.
- Financial surety shall be maintained for the life of the project.
- Proof of recertification of the financial surety instrument must be submitted to the County annually.
- Every ten (10) years, the facility owner or operator shall retain an independent Licensed Engineer to re-estimate the total cost of decommissioning and attest that the value of the financial surety instrument is appropriate. This report shall be filed with the County.
 - The required amount of the decommissioning fund shall match the reestimated cost of decommissioning. Within ninety (90) days of filing the reestimation report with the County, the facility owner or operator shall cause the fund balance of the financial surety instrument to be adjusted to ensure that it matches the re-estimated decommissioning cost.

PCR will be responsible for decommissioning the Project facilities.

Stantec

FIGURES



DECOMMISSIONING PLAN LONE TREE SOLAR PROJECT, JOHNSON COUNTY, IOWA

Figure 1 Project Layout





BANK PERFORMANCE AGREEMENT

Whereas, PCR Investments SP2 LLC, hereinafter referred to as "Applicant", has commenced development pursuant to a previously approved Zoning Amendment Application for Lone Tree Solar (Johnson County Application) PZC-23-28330, and is now seeking approval for a zoning amendment; and

Whereas, PCR Investments SP2 LLC, has an executed lease agreement on the real property located at 6004 Sioux Avenue SE, Lone Tree, Iowa, in Johnson County, Iowa, which is legally described as:

LEGAL DESCRIPTION

A PART OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER OF SECTION 1, TOWNSHIP 77 NORTH, RANGE 6 WEST OF THE 5TH P.M., JOHNSON COUNTY, IOWA, MORE PARTICULARLY DESCRIBED AS; COMMENCING AT THE SOUTHEAST CORNER OF THE SAID SOUTHEAST QUARTER; THENCE SOUTH 88°32'17" WEST, ALONG THE SOUTH LINE OF THE SAID SOUTHEAST QUARTER, 1329.68 FEET TO THE SOUTHWEST CORNER OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER; THENCE NORTH 00°36'11" WEST, ALONG THE WEST LINE OF THE SAID EAST ONE-HALF OF THE SOUTHEAST QUARTER, 115.85 FEET TO THE NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22 AND BEING THE POINT OF BEGINNING FOR THE LAND HEREIN INTENDED TO BE DESCRIBED; THENCE CONTINUING NORTH 00°36'11" WEST, ALONG THE SAID WEST LINE OF THE EAST ONE-HALF OF THE SOUTHEAST QUARTER, 1680.38 FEET; THENCE NORTH 88°32'56" EAST, 1296.75 FEET TO THE WEST RIGHT OF WAY LINE OF SIOUX AVENUE; THENCE SOUTH 00°36'04" EAST, ALONG THE SAID WEST RIGHT OF WAY LINE OF SIOUX AVENUE; THENCE SOUTH 00°36'04" EAST, ALONG THE SAID WEST RIGHT OF WAY LINE OF SIOUX AVENUE AND PARALLEL TO AND 33 FEET PERPENDICULAR TO THE EAST LINE OF THE SAID SOUTHEAST QUARTER, 1581.49 FEET; THENCE SOUTH 08°56'56" WEST, CONTINUING ALONG THE WEST RIGHT OF WAY LINE OF SIOUX AVENUE, 100.63 FEET TO THE SAID NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22; THENCE SOUTH 88°33'11" WEST, ALONG THE SAID NORTH RIGHT OF WAY LINE OF IOWA HIGHWAY 22, 1279.98 FEET TO THE POINT OF BEGINNING.

Whereas, Applicant desires to obtain approval from the Johnson County Board of Supervisors for a zoning amendment from Agricultural to Renewable Energy use to site a PV solar farm.); and due to the requirement for financial assurances for decommissioning the facility and restoring the land to agricultural use, as shown on Exhibit A: Decommissioning Cost Estimate, containing an engineer's estimate, and a table showing the equipment to be removed and the responsibilities to restore the land to agricultural use describing the work to be performed, all of which is attached hereto and by this reference is made a part hereof; and

Whereas, as an inducement for Johnson County to approve the zoning amendment for Lone Tree Solar, as requested by Applicant, and as a means of ensuring compliance with the decommissioning of the solar facility and restoration of the land for agricultural use as shown on the attached Exhibit A: Decommissioning Cost Estimate, the Applicant hereby commits to providing financial assurance to ensure the completion of all decommissioning and restoration as shown on the attached Exhibit A: Decommissioning Cost Estimate in a timely manner; and

Whereas, the amount of \$ 452,791 will be necessary to complete the decommissioning of all listed equipment and restoration of the land to agricultural use, which includes a 10% decommissioning contingency, and which amount is supported by the Cost Estimate prepared by a professional engineer, attached hereto as Exhibit A: Decommissioning Cost Estimate

The amount specified is for 110% of the cost at the time of application/approval. The dollar amount will be recalculated in 5-year intervals and the amount of the letter (and covered by the agreement) will be adjusted accordingly; and

Whereas, Applicant offers to guarantee decommissioning of the facility and restoration of the land to agricultural use as specified above and in Exhibit A: Decommissioning Cost Estimate by obtaining and pledging a Standby Letter of Credit ("Letter"), in the amount of \$226,394.50 prior to construction from

JP Morgan Chase & Co. located in New York, and the amount of \$113,197.75 within five (5) years of the date of initial approval and the remaining \$113,197.75 within eleven (11) years of the date of initial approval to, and for, the benefit of Johnson County, a copy of which is attached hereto as Exhibit B: Financial Assurances and incorporated in this Agreement by this reference. Financial institution providing Letter might change through the life of the project.

And Exhibit C: Decommissioning Site Plan has been completed and the land restored to agricultural use and certified "completed", the Letter of Credit may then be canceled; and

Whereas, the Johnson County Zoning Administrator and the Johnson County Attorney have been provided the Letter in advance of execution of the Agreement for review, have approved the use of the Letter to satisfy the performance agreement requirement, and have agreed that the terms and conditions of this Agreement and Letter, and Applicant's performance hereunder, will protect the interests of Johnson County herein.

Now, therefore, in consideration of the mutual covenants hereinafter set forth, it is agreed between Johnson County, Iowa and Applicant as follows:

- 1. Applicant agrees to decommission the solar facility and restore the land to agricultural use as shown on and in conformance with the approved Exhibit C: Decommissioning Site Plan and narrative set forth in Exhibit A: Decommissioning Cost Estimate.
- 2. Coincident with approval of Applicant's Zoning Amendment, Applicant shall deliver the Letter to Johnson County, Iowa. The project sponsor agrees to set up a Letter at least 3 months prior to construction start risking construction suspension if LC is not in place according to agreed standards. The Letter shall serve as security payment of the specified amounts in the event all required decommissioning and restoration as shown on the attached Exhibit C: Decommissioning Site Plan are not completed within 12 months after required decommissioning is triggered and the parties hereto agree that the Letter shall remain in effect until JPMorgan Chase & Co receives a written authorization from the Johnson County Zoning Administrator to cancel said Letter. Said authorization shall be provided within 30 days of Applicant providing the proper documentation to the Johnson County Zoning Administrator that the said improvements have been completed and certified.
- 3. Johnson County and Applicant agree that the amount specified in the Letter represents approximately one hundred and ten percent (110%) of the cost of completing and installing all required improvements as shown on the attached Exhibit A: Decommissioning Cost Estimate and that the Johnson County Zoning Administration will authorize the cancellation of the Letter upon being satisfied that the improvements have been completed and installed in a timely and satisfactory manner and as shown on Exhibit C: Decommissioning Site Plan.
- 4. Applicant and JP Morgan Chase & Co agree that, if not canceled within 12 months after required decommissioning is triggered as a result of Applicant's timely decommissioning and restoration shown on Exhibit C: Decommissioning Site Plan, the Letter shall continue until its cancellation has been authorized by the Johnson County Zoning Administrator.
- 5. In the event that the decommissioning and restoration as shown on the attached Exhibit A:

Decommissioning Cost Estimate have not been completed within 12 months after required decommissioning is triggered, Applicant shall be obliged to pay Johnson County in the sum of \$452,791. Failure to fulfill such obligation within ten [10] days of receipt of notice, the County may use the Letter to receive payment and apply such funds towards the decommissioning and restoration shown on Exhibit C: Decommissioning Site Plan JP Morgan Chase & Co agrees to pay over the funds to Johnson County upon request in writing to do so by the Johnson County Attorney, who will provide proper documentation of prior notification delivered to Applicant and Applicant's failure to complete the decommissioning and restoration by the agreed date according to [Performance Agreement]. The Johnson County Zoning Administrator may grant an extension of this deadline, and any forbearance or failure of Johnson County to insist on the performance of any terms or conditions of this Agreement shall not be construed as a waiver of relinquishment of any rights granted hereunder or of the future performance of any such term or condition, and the obligations of the Applicant and JP Morgan Chase & Co with respect thereto shall continue in full force and effect for the decommissioning and restoration as shown on the attached Exhibit C: Decommissioning Site Plan.

- 6. If the cost of the decommissioning and restoration of all required improvements as shown on the attached Exhibit A: Decommissioning Cost Estimate exceeds the amount specified in the Letter, Johnson County shall have a lien and charge against the Project Site for the balance of the cost, in addition to any direct claim against Applicant. In the event Johnson County has proceeded to complete decommissioning and restoration due to Applicant's default, if the amount of payment demanded and received by the County exceeds the cost of construction and installation of the improvements, the County shall refund to Applicant any amount received from the Letter but not used by the County for construction of the same, net of all associated expenses incurred by the County, within 60 days after completion of the decommissioning and restoration works.
- 7. In the event that a dispute arises as to whether Applicant has completed the decommissioning and restoration as shown on the attached Exhibit C: Decommissioning Site Plan, or as subsequently agreed to by the County and Applicant, in writing, the Letter shall remain in effect until any dispute between the parties is resolved. Applicant agrees that JP Morgan Chase & Co is authorized to use the Letter to satisfy any Court Order, binding arbitration award, or mutual settlement between the parties if Applicant does not satisfy such order, award, or settlement. Any remaining amount together with the interest accrued thereon shall be returned to Applicant.
- 8. The expenses of the Letter, if any, shall be the sole obligation of the Applicant. JP Morgan Chase & Co shall have no obligation under this Agreement except as set out herein, and Johnson County and Applicant agree that there is no obligation on JP Morgan Chase & Co to perform the obligations of the County or of Applicant, except payment of amounts promised by Applicant to Johnson County in Paragraph 5 above.
- 9. The Johnson County Zoning Administrator commits to make a determination as to whether all required improvements as shown on the attached Exhibit C: Decommissioning Site Plan have been completed in a satisfactory manner within 30 days of request and documentation from Applicant, and that the Letter should be canceled, all of it in the same 30 days period of time. Johnson County further agrees that it will immediately after termination of said 30 days period of time, notify JP Morgan Chase & Co and Applicant, in writing, when such a determination has been made and that the Letter should be canceled. Such Notice will JP Morgan Chase & Co to cancel the Letter.

Dated this day of <MONTH>, <YEAR> at Iowa City, IA PCR Investments SP2 LLC By: Mariano Brandi Title: President JPMorgan Chase & Co By: Johnson County, Iowa By: Joshua Busard, Director Planning, Development & Sustainability

<LISTING/DESCRIPTION OF ATTACHMENTS>

Exhibit A: Decommissioning Cost Estimate

Exhibit B: Financial Assurances

Exhibit C: Decommissioning Site Plan



Attachment I: Sensitive Areas Analysis



May 25, 2023

Cynthia Schuchner PCR US Investments Corp 1334 Brittmoore Rd Ste 2407 Houston, TX 77043

Telephone: (832) 955 1979

Email: cschuchner@pcr.energy

RE: Conifer Power Lone Tree Sensitive Areas Analysis (Revised)

Parcel No. 1801476001

Highway 22 and Sioux Avenue SE Lone Tree, Johnson County, Iowa Terracon Project No. 06227115RR

Dear Ms. Schuchner:

Terracon is pleased to submit the enclosed Sensitive Areas Analysis report in accordance with our proposal (Terracon Proposal No. P06227115R) dated August 23, 2022. Terracon appreciates the opportunity to provide services on this important project. Please feel free to contact Jordan Smith if you have any questions or require additional information.

Sincerely,

Terracon Consultants, Inc.

Enclosure: Sensitive Areas Analysis Report



Sensitive Areas Analysis Report (Revised)

Conifer Power Lone Tree Sensitive Areas Analysis
Highway 22 and Sioux Avenue
Lone Tree, Johnson County, Iowa

May 25, 2023

Terracon Project No. 06227115RR



PCR US Investments Corp Houston, Texas

Prepared by:

Terracon Consultants, Inc. Cedar Rapids, Iowa

terracon.com



Environmental Facilities Geotechnical Materials



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

TABLE OF CONTENTS

1.0	SITE	LOCATION AND PROJECT DESCRIPTION
	Table	1. Site Information
2.0	SCOF	PE OF SERVICES
	2.1	Task 1: Critical Wildlife Habitat Review
	2.2	Task 2: Floodplain and Floodway Review
	2.3	Task 3: Historic Properties Review
	2.4	Task 4: Prairie and Prairie Remnants Review
	2.5	Task 5: Savanna and Savanna Remnants Review
	2.6	Task 6: Significant Slopes Review2
	2.7	Task 7: Stream Corridors, Watercourses, and Surface Water Bodies Review
	2.8	Task 8: Wetlands Review
	2.9	Task 9: Woodlands Review
3.0	CON	CLUSIONS4
4.0	CLOS	SING

APPENDICES

APPENDIX A – EXHIBITS

EXHIBIT 1: FEMA FIRM Map EXHIBIT 2: Aerial Image

EXHIBIT 3: Topographic Maps

EXHIBIT 4: Wetland Delineation Map EXHIBIT 5: Sensitive Areas Plat Exhibit

Exhibit 6: Johnson County Property Information Viewer Rusty Patch

Bumble Bee Low-High Potential Zones Map

APPENDIX B - HISTORICAL REPORTS



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

1.0 SITE LOCATION AND PROJECT DESCRIPTION

Terracon understands that PRC US Investments Corp (the Client) and Conifer Power are preparing preliminary plans to develop the site, located at Highway 22 and Sioux Avenue, with an approximate 7.5-megawatt solar facility. The location of the site is indicated on the attached Exhibits.

2.0 SCOPE OF SERVICES

2.1 Task 1: Critical Wildlife Habitat Review

To determine if critical wildlife habitat exists on-site, Terracon utilized the Iowa Department of Natural Resources (IDNR) PERMT site in addition to the Information for Planning and Consultation (IPaC) websites to obtain updated information pertaining to the site. Terracon had previously obtained information from the IDNR PERMT and IPaC websites for past work completed at the site (Preliminary Threatened and Endangered Species Habitat Assessment Review dated June 17, 2022). However, updated documentation was obtained to reflect current conditions at the site. After review of the updated documentation provided by the IDNR PRMT and IPaC sites, there appears to be no critical wildlife habitat on-site. This includes no suitable bat habitat as the site is void of trees. Also, based on the Johnson County Property Information Viewer, the site is outside of the low and high-potential zones for the Rusty Patched Bumble Bee as shown in Appendix A, Exhibit 6. The prior historical threatened and endangered species report, including the species list as well as agency communication, can be seen as an attachment in Appendix B.

2.2 Task 2: Floodplain and Floodway Review

To determine if floodplains and/or floodways are present on-site, Terracon reviewed the Federal Emergency Management Agency (FEMA) Fire Insurance Rate Map (FIRM) panel numbers 19103C0340E and 19103C0405E, both maps have been effective since February 16, 2007. Based on a review of the FEMA FIRM maps, the site does not appear to be within a floodplain or floodway. The site is in Zone X, which is an area of minimal flood hazard. However, areas adjacent west and northeast of the site are in Zone A, which are areas with 1% annual chance of



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

flooding over the life of a 30-year mortgage. A FEMA FIRM map is included in Appendix A, Exhibit 1.

2.3 Task 3: Historic Properties Review

To determine if historically significant structures or significant archaeological sites are present in the project area, Terracon reviewed the previously completed Desktop Cultural Resources Assessment dated May 5, 2022. Based on review of the previous report, the area of potential effect is currently undeveloped with agricultural fields, and there were no previously recorded archeological sites identified in the project area.

Terracon engaged the State Historic Preservation Office (SHPO) for recommendations based on the Desktop Cultural Resources Assessment dated May 5, 2022. Based on conversations with SHPO, it was recommended that a pedestrian survey be performed. Terracon, on the behalf of PCR, engaged Bear Creek Environmental to complete the pedestrian survey. Based on the Phase I Archaeological Investigation performed by Bear Creek and dated December, 2022, no cultural materials were observed or collected from the project area during the investigation. Based on those findings, Bear Creek does not recommend further cultural resource investigations for this project at this time. Should cultural materials be discovered during proposed development activities, those activities should cease and the SHPO contacted about the discovery.

The Desktop Cultural Resources Assessment and Bear Creek report are included Appendix B.

2.4 Task 4: Prairie and Prairie Remnants Review

Terracon utilized aerial photos to determine the cropping history of the site. Based on review of the aerial images, it appears as though the site has been utilized for agricultural row crop production since at least 1937. Due to the utilization of the site as agricultural row crops, there does not appear to be prairie or prairie remnants located on-site. The referenced aerial images are included in Appendix A, Exhibit 2.

2.5 Task 5: Savanna and Savanna Remnants Review

Terracon utilized aerial photos to determine if savannas or savanna remnants are present on-site. Based on review of the aerial images, it appears as though the site has been utilized for agricultural row crop production since at least 1937. There does not appear to be savannas or savanna remnants located on-site. The referenced aerial images are included in Appendix A, Exhibit 2.

2.6 Task 6: Significant Slopes Review

Terracon utilized topographic maps to identify landforms that may contain slopes that are at a



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

high risk to erode, slide, or collapse, as well as classify slopes as either a critical or protected slope. A critical slope is a landform with a grade between 25%-35%, and a protected slope is a landform with a grade that exceeds 35%. Based on review of the topographic maps as shown in Appendix A, Exhibit 3, Terracon did not observe slopes that would be classified as either a critical or protected slopes. The maximum slope within the project boundary is approximately 3-5%. Portions of the topographic maps presented in Appendix A, Exhibit 3 are missing coverage, and may not show portions of the site.

2.7 Task 7: Stream Corridors, Watercourses, and Surface Water Bodies Review

To determine if an area contains a stream corridor, watercourse and/or surface water body (aquatic features), Terracon utilized the most current topographic maps, as well as the FEMA FIRM map that was obtained for the site. Based on review of the Quadrangle map and the FEMA FIRM map, an approximately 850-foot stream corridor of Otter Creek was identified on the site, running in a southeast to northwest orientation transecting the southwest corner of the site. The tributary was labeled as an intermittent stream on the Quadrangle map, as depicted by the blue solid and dashed line. Since no floodway was delineated on the FEMA FIRM map, the blue line on the Quadrangle map shall serve as the centerline of a 30-foot wide stream corridor. There is also an apparent grassed-swale in the northwest portion of the site. The apparent swale does not have defining bed and bank characteristics and therefore would not be classified as a stream corridor, waterbody, or surface water body. Based on the classification of the stream, a 30-foot natural buffer shall be established around the stream corridor. The FEMA FIRM map is included in Appendix A, Exhibit 1, and the topographic maps are included in Appendix A, Exhibit 3. Photos of the observed area are included in Appendix C. Portions of the topographic maps presented in Appendix A, Exhibit 3 are missing coverage, and may not show portions of the site.

2.8 Task 8: Wetlands Review

To identify areas that would be classified as wetlands, Terracon performed a Waters of the United States (WOUS) and Wetland Delineation Report (the Report) dated June 8, 2022. Furthermore, Johnson County requests that any identified wetlands be classified in one of three classes based on size, makeup, and habitat. Based on the findings of the report, Terracon observed an on-site wetland and an apparent on-site stream corridor. The observed wetland exhibited hydric soil, and wetland hydrology characteristics and totaled approximately 0.43 acres. Based on the Johnson County wetland classification system, this wetland would be classified as a Class 3 wetland, and this wetland would require a 50-foot buffer. The apparent grassed-swale in the northwest portion of the site did not exhibit hydrophytic vegetation or hydric soil. Furthermore, areas exhibiting potential hydric soil, contours, and wet signatures were not identified on the National Wetland Inventory map (NWI), with the exception of isolated areas generally located on the eastern portion of the site as shown in the Report shown in Appendix B. Based on field investigation, these areas did not meet wetland criteria for hydrophytic vegetation or hydric soil. DP-2 shown in Appendix A, Exhibit 4 is a representative data point for these areas.



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

Impact to wetlands is only allowed if it is clearly demonstrated that avoiding and minimizing the impact is unreasonable. Impacts must also consider the class of the wetlands. Class 1 wetlands shall not be impacted for any purpose. Class 2 and 3 wetlands shall not be impacted unless for critical or required infrastructure. No impacts to wetlands are proposed or authorized at this time, and the limits of disturbance/conservation easements will be flagged in the field prior to any site work. Furthermore, restoration, enhancement, maintenance and other best management activities in accordance with the UDO may be allowed.

2.9 Task 9: Woodlands Review

To identify woodland areas on the site, Terracon utilized aerial images in addition to prior site knowledge collected from Terracon's Waters of the United States and Wetland Delineation Report (the Report) dated June 8, 2022 to determine the presence of woodland areas. Based on past site reconnaissance and the review of aerial images, woodlands were not observed on-site. Aerial images are included in Appendix A, Exhibit 2. Site photographs are included in Appendix C.

3.0 CONCLUSIONS

Based on a review of the nine sensitive areas analysis requirements as required by Johnson County, no sensitive area features were identified with the exceptions of a class 3 wetland and an unnamed stream corridor.

The wetland exhibited hydric soil, wetland hydrology characteristics and totaled approximately 0.43 acres. Based on the Johnson County wetland classification system, this wetland would be classified as a Class 3 wetland and would require a 50-foot buffer. The wetland exhibit produced from the Report are included in Appendix A, Exhibit 4. The full wetland report is also included in Appendix B.

The unnamed stream corridor was observed running in a southeast to northwest orientation, transecting the southwest corner of the site The stream corridor was labeled as an intermittent stream on the Quadrangle map, as depicted by the blue solid and dashed line. Since no floodway was delineated on the FEMA FIRM map, the blue line on the Quadrangle map shall serve as the centerline of a 30-foot wide stream corridor. Based on the classification of the stream, a 30-foot natural buffer shall be established around the stream corridor.

At this time, there are no planned impacts to the identified sensitive areas. The preliminary plans show an access road transecting the southwest portion of the site along the apparent wetland and stream corridor. However, at this time, it is planned that this access road (and erosion control measures) is outside of both of the applicable buffers for the wetland and stream. The buffers and limit of disturbance/conervation easement (LOD) can be seen in Exhibit 5 in Appendix B.



Conifer Power Lone Tree Sensitive Areas Analysis ■ Lone Tree, Johnson County, Iowa May 25, 2023 ■ Terracon Project No. 06227115RRR

4.0 CLOSING

Terracon appreciates the opportunity to provide services on this important project. Please feel free to contact Jordan Smith if you have any questions or require additional information.

Sincerely,

Terracon Consultants, Inc.




APPENDIX A Exhibits

National Flood Hazard Layer FIRMette






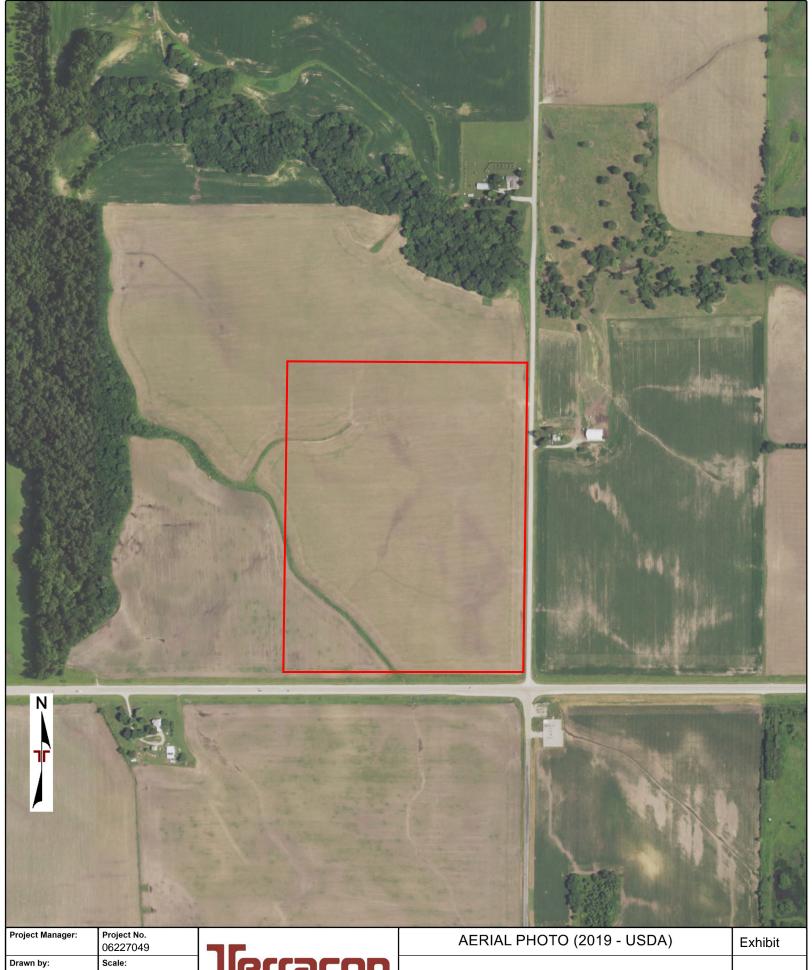

1" = 500' File Name: Checked by: 22042000035 Approved by: Date: 2022-04-21

2640 12th St SW Cedar Rapids, Iowa 52404

Lone Tree Site Lone Tree Site Parcel 1801476001, Iowa

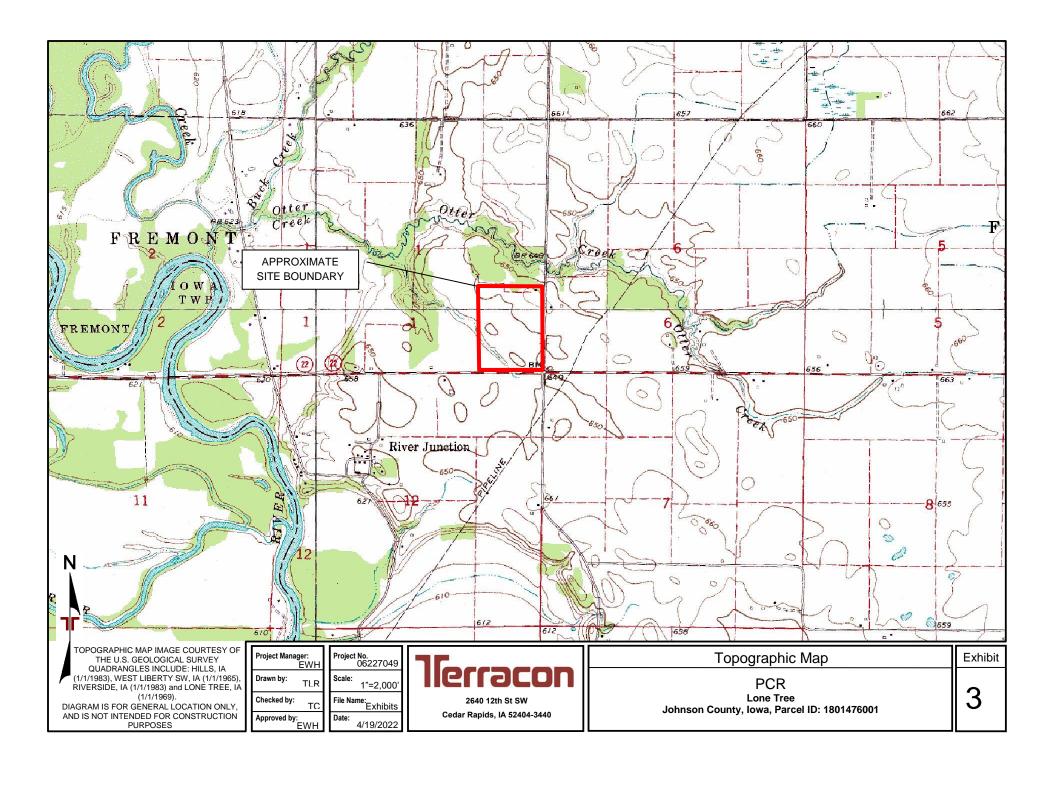











WETLAND DELINEATION MAP - LONE TREE

CONIFER POWER WETLANDS
CONIFER POWER
HIGHWAY 22
LONE TREE, IOWA

EXHIBIT

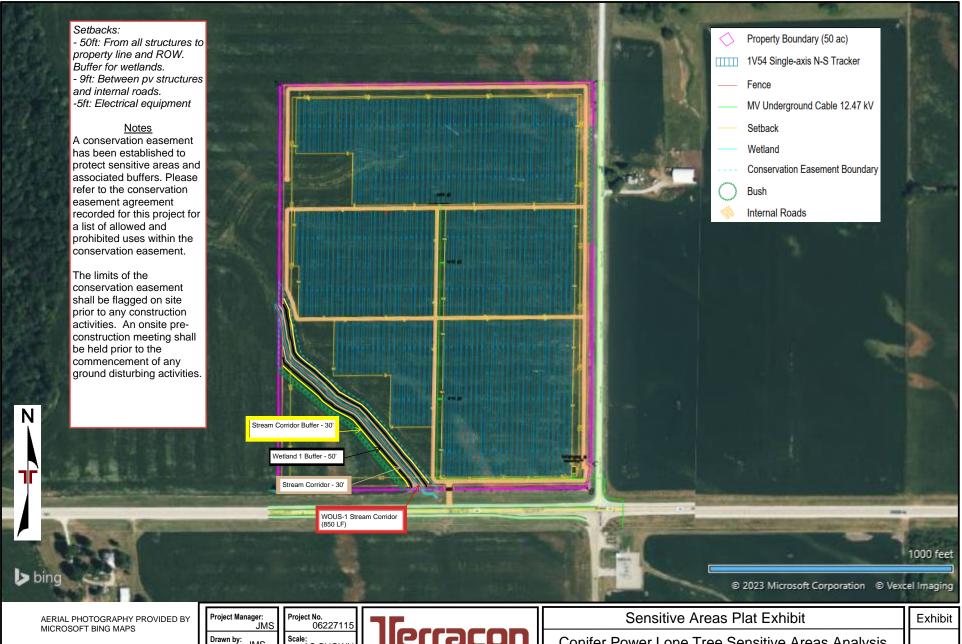


DIAGRAM IS FOR GENERAL LOCATION ONLY, AND IS NOT INTENDED FOR CONSTRUCTION PURPOSES

Drawn by: JMS Checked by: Approved by:


Scale: AS SHOWN File Name: Date:

Oct. '23

2640 12th St SW

Cedar Rapids, IA 52404-3440

Conifer Power Lone Tree Sensitive Areas Analysis Lone Tree, IA

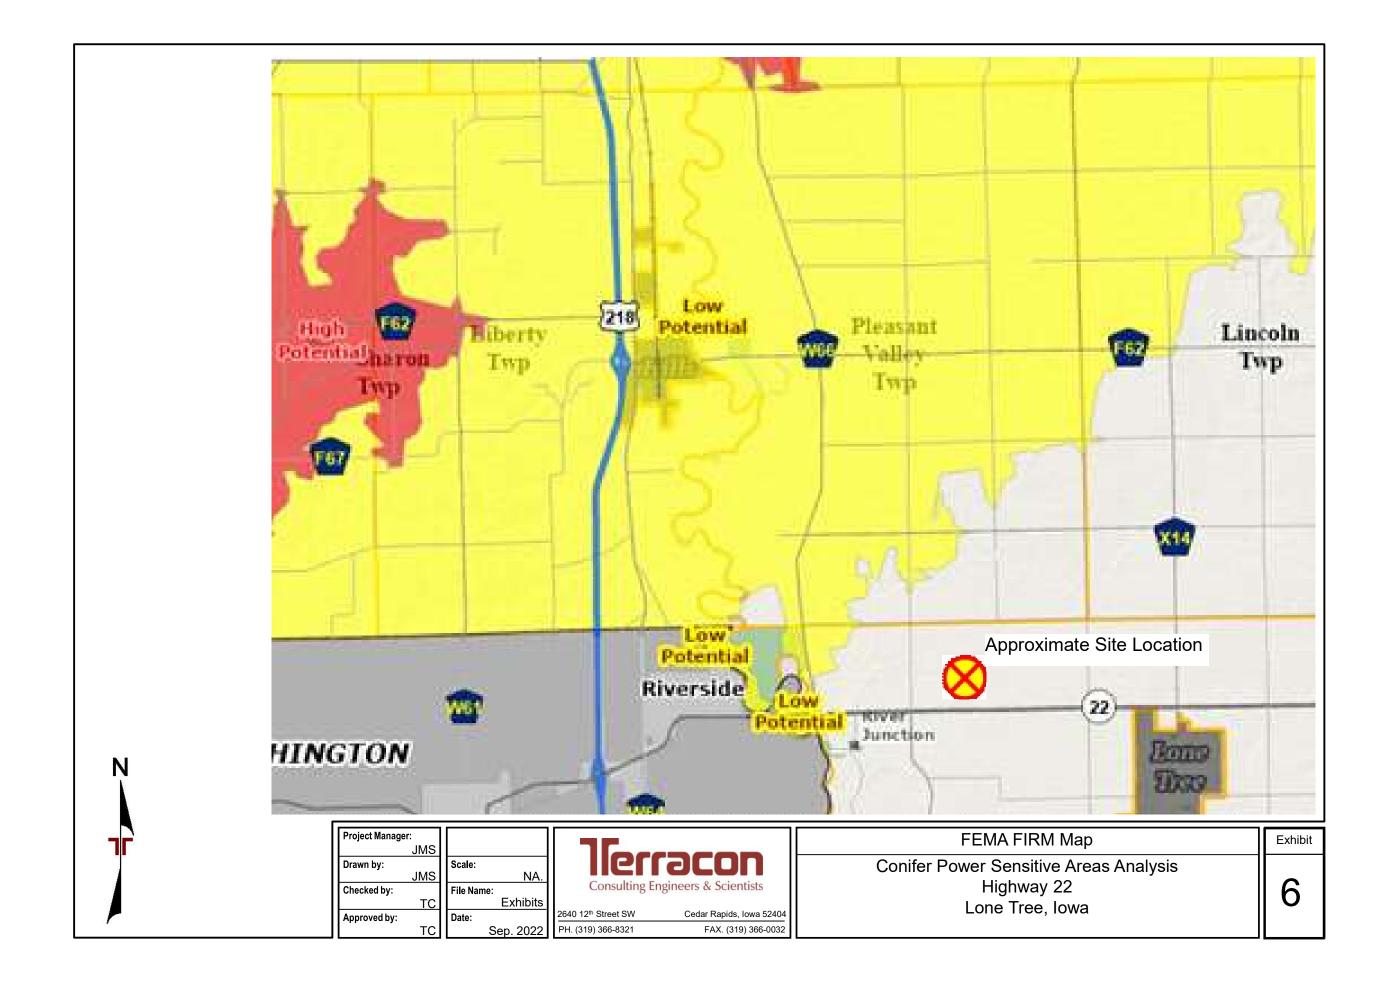



APPENDIX BHistorical Reports

Lone Tree Site lowa Highway 22 and Sioux Avenue SE Johnson County, Iowa

April 29, 2022

Terracon Project No. 06227049, Task 2.4



Prepared for:

PCR US Investments Corporation Houston, Texas

Prepared by:

Caitlin Gulihur, MA, RPA Terracon Consultants, Inc. Austin, Texas

terracon.com



Environmental Facilities Geotechnical Materials

Lone Tree Site ■ Johnson County, Iowa

April 29, 2022 Terracon Project: 06227049, Task 2.4



Desktop Cultural Resources Assessment
Lone Tree Site
Johnson County, Iowa
Terracon Project No. 06227049, Task 2.4
April 29, 2022

Introduction

Terracon Consultants, Inc. (Terracon) was retained by Conifer Power Company (Conifer) on behalf of PCR US Investments Corporation (client) to perform a desktop cultural resources assessment on an approximate 50-acre parcel located in Johnson County, northeast of River Junction, Iowa (Exhibits 1 and 2). This report has been prepared in accordance with our proposal dated March 31, 2022. It is Terracon's understanding that the project area is privately owned, and that the proposed project will be carried out with private funds.

As discussed below, the purpose of Terracon's review is to assist the client in evaluating and complying with requirements relative to Section 106 of the National Historic Preservation Act (NHPA) of 1966, as amended, and its implementing regulations (Title 36 Code of Federal Regulations Part 800). This report is a desktop review of the project with regards to potential impacts to recorded historic properties, is based solely on research and was not informed by archaeological fieldwork.

Project Description and Area of Potential Effect

Terracon understands that the Client and Conifer are preparing preliminary plans to develop the project area with approximate 10-megawatt solar facilities. The proposed project will include a Gen-tie route, which is currently not identified. The project area is located northeast of River Junction, Iowa, in Johnson County, Township 77N, Range 6W, Section 1. For the purposes of the current desktop review, the total area of the potential ground disturbances is considered as the area of potential effect (APE). The total area of the APE is approximately 50 acres for the proposed solar facilities (see Exhibits 1 and 2). The project area is currently an undeveloped agricultural field.

Environmental Context

The project area is located within the Upper Mississippi Alluvial Plain (72d) Level IV ecoregion, characterized by smooth to irregular alluvial plains (Chapman et al. 2002). The vegetation of this ecoregion was historically a mix of oak-hickory forests and tallgrass prairie; however, the majority of the ecoregion is currently used as cropland. In general terms, the project area is located in a rural environment, and consists of an undeveloped tract.

Lone Tree Site ■ Johnson County, Iowa

April 29, 2022 Terracon Project: 06227049, Task 2.4



Bedrock geology of the project area is mapped as Famennian Formations (Df), consisting of shale, siltstone, and dolomite (Witzke et al. 2010).

Although agricultural in nature, county soil surveys provide a description of soil characteristics, including depth, color, inclusions, etc., which can be used to elucidate formation processes and environmental characteristics. Eight soils are mapped in the APE (Exhibit 3; USDA NRCS 2022).

Table 1. Soil Survey Data in APE.

Table 1. Soil Survey Data in APE.						
Soil or Series Name	Drainage	Soil Depth	Associated Landform			
Tama silt loam, 2 to 5 percent slopes (175B)	Well drained	60 inches to bedrock	Summit, shoulder, and backslope of interfluves			
Sperry silt loam, depressional, 0 to 1 percent slopes (122)	Poorly drained	78 inches to bedrock	Summits of interfluves			
Walford silt loam, 0 to 2 percent slopes (160)	Poorly drained	80 inches to bedrock	Summits of interfluves			
Dickinson fine sandy loam, 2 to 5 percent slopes (175B)	Well drained	60 inches to bedrock	Summit, shoulder, and backslope of dunes			
Atterberry silt loam, 1 to 3 percent slopes (291)	Somewhat poorly drained	60 inches to bedrock	Summits of interfluves			
Downs silt loam, till plain, 2 to 5 percent slopes (M162B)	Well drained	60 inches to bedrock	Summits and shoulders of interfluves			
Downs silt loam, till plain, 5 to 9 percent slopes (M162C)	Well drained	60 inches to bedrock	Summits and shoulders of interfluves			
Downs silt loam, till plain, 5 to 9 percent slopes, eroded (M162C2)	Well drained	60 inches to bedrock	Summits and shoulders of interfluves			

Site Records and Literature Review

The National Register of Historic Places (NRHP) and ISites Public Data Web Map databases informed this records review. In addition, the Office of the State Archaeologist (OSA) was contacted on April 25, 2022, to request a Site File Search. The State Historical Society of Iowa was contacted for information regarding historical resources within one mile of the APE (Berry Bennett, personal communication 2022). Properties and/or districts listed on the NRHP were not located within the APE or within the 1-mile search buffer. Walker Park and Memorial Building located in River Junction was nominated to the NRHP, but the nomination was not completed,

Lone Tree Site ■ Johnson County, Iowa

April 29, 2022 Terracon Project: 06227049, Task 2.4



and the resource is not listed. The River Junction Cemetery has not been evaluated for NRHP eligibility. In addition to these resources, the OSA had the Old River Junction Bridge from the Notable Locations Database and Abraham Owen Stumptown from the Historic Indian Locations Database mapped within one mile of the APE. These features are not located within or adjacent to the APE, and are not recorded as archaeological sites, but are considered to be locations with potential historical and/or archaeological value.

According to the OSA Site File Search, previously recorded archaeological sites are not located within or adjacent to the APE. One previously recorded archaeological site, 13JH554, is located within the 1-mile search buffer. Site 13JH554 is recorded as a historic-age Euro-American school; the site is approximately 0.15-mile west of the APE. A previous cultural resources survey is located along Iowa Highway 22, immediately south of the APE; portions of that survey may intersect with the current APE.

Historical Maps and Aerial Review

Historic resources used to inform this review included maps and other resources ordered online. Topographic maps from 1894, 1965, and 1969 were reviewed (ERIS 2022a). Historical aerial photographs from 1937, 1951, 1963, 1970, 1983, 1994, 2005, 2010, and 2019 were also examined (ERIS 2022b). In the topographic map from 1894, structures are not marked in the northern portion of the APE; the southern portion of the APE is not included in the map. The topographic map from 1965 covers the northern portion of the APE; one structure is marked in the northeast corner of the project area. The 1969 map covers the southern portion of the APE and no structures are marked. In the aerial photograph from 1937, structures are not visible in the APE. In the aerial photographs from 1951, 1963, and 1970, a driveway is present in the northeast corner of the APE, and structures associated with that driveway are present within and adjacent to the APE. In the aerials from 1983 and later, the driveway and structures are no longer visible.

Conclusions and Recommendations

This review relied primarily upon public and nonpublic sources of information, as well as information from the client. Aerial photographs indicate that the APE is currently a vacant agricultural field; evidence of historic-age features was observed in aerial photographs and in topographic maps. Therefore, there is moderate potential to encounter intact, isolable historic-age archaeological deposits. Previously recorded archeological sites are not located within or adjacent to the APE. Based on the topographic setting, the likelihood of the APE to contain intact, isolable prehistoric deposits is low to moderate.

At this time, it is understood that the proposed project will not involve funding or permitting from federal entities, which would provide a nexus for federal oversight. If funding or permitting from a federal entity, such as the US Army Corps of Engineers, is required for this project, a cultural resources survey may be required by the Iowa State Historic Preservation Office (SHPO) in order to comply with Section 106 of the NHPA.

Lone Tree Site ■ Johnson County, Iowa

April 29, 2022 Terracon Project: 06227049, Task 2.4



Sincerely,

Terracon Consultants, Inc.

Lone Tree Site ■ Johnson County, Iowa

April 29, 2022 Terracon Project: 06227049, Task 2.4



References Cited

Chapman, S.S., J.M. Omernik, G.E. Griffith, W.A. Schroeder, T.A. Nigh, and T.F. Wilton 2002 *Ecoregions of Iowa and Missouri*. Color poster with map, descriptive test, summary tables, and photographs. U.S. Geological Survey, Reston, Virginia.

Environmental Risk Information Services (ERIS) 2022a *Topographic Maps*. Ordered from <u>www.erisinfo.com</u>. Received April 20, 2022.

2022b Historical Aerials. Ordered from www.erisinfo.com. Received April 21, 2022.

National Parks Service (NPS)

2022 National Register of Historic Places. National Parks Service, U.S. Department of the Interior. https://www.nps.gov/maps/full.html?mapId=7ad17cc9-b808-4ff8-a2f9-a99909164466. Accessed April 2022.

Office of the State Archaeologist

2022a Iowa Site File Search No. 2022142. Office of the State Archaeologist, University of Iowa. Received April 26, 2022.


2022b I-Sites Public Data Web Map. Office of the State Archaeologist, powered by ESRI. https://isugisf.maps.arcgis.com/apps/Viewer/index.html?appid=3117ad0729b046a697ae5ba82c9b8cfa. Accessed April 2022.

United State Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS), Soil Survey Staff

2022 Web Soil Survey. https://websoilsurvey.sc.egov.usda.gov/App/WebSoilSurvey.aspx. Accessed April 2022.

Witzke, Brian J., Raymond R. Anderson, and John P. Pope

2010 Bedrock Geologic Map of Iowa. Iowa Geological and Water Survey. https://ngmdb.usgs.gov/ngm-bin/pdp/zui_viewer.pl?id=36869. Accessed April 2022.

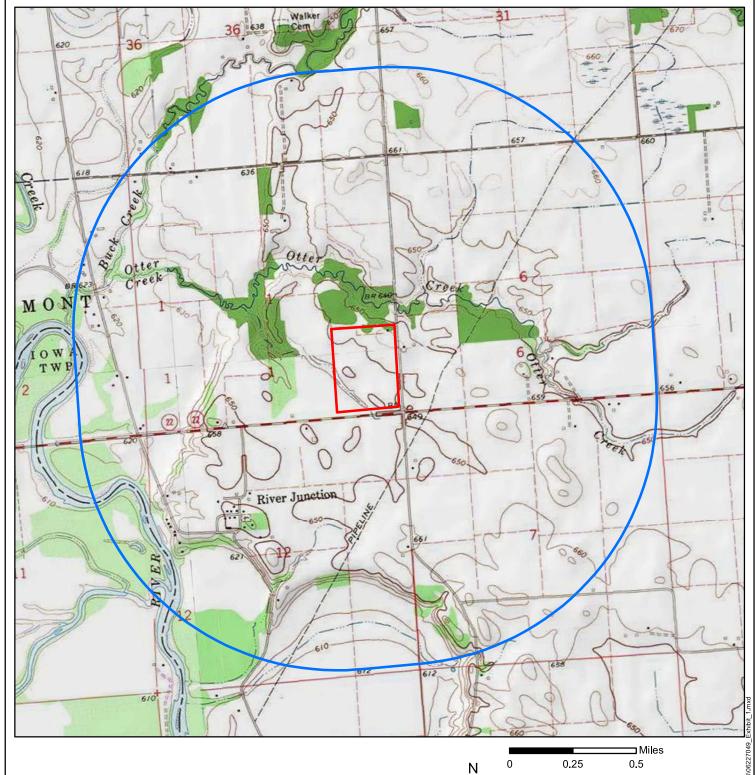

DATA SOURCES:
ESRI WMS - World Aerial Imagery, OpenStreetMap USDA
WSS, TNRIS, TWDB, USGS, USGS MR OSD, Service
Layer Credits: Copyright:© 2013 National Geographic
Society, i-cubed

Project No.: 06227049, 2.4 Date:

4/28/2022 Drawn By:

Reviewed By:

AS

5307 Industrial Oaks Blvd.

Suite 160

PH. (512) 442-1122

Austin, TX 78735 terracon.com

USGS Topographic Map

USGS Topographic Maps: Lone Tree (1969), West Liberty SW (1965), Hills (1983), and Riverside (1983) Conifer Solar Site - Lone Tree Johnson County, Iowa

Exhibit



Ν

⊐ Feet 1,000 500

DATA SOURCES:
ESRI WMS - World Aerial Imagery, OpenStreetMap USDA
WSS, TNRIS, TWDB, USGS, USGS MR OSD, Service
Layer Credits: Source: Esri, DigitalGlobe, GeoEye,
Earthstar Geographics, CNES/Airbus DS, USDA, USGS,
AeroGRID, IGN, and the GIS User Community

Project No.: 06227049, 2.4 Date:

4/28/2022 Drawn By:

Reviewed By:

5307 Industrial Oaks Blvd. Suite 160


PH. (512) 442-1122

Austin, TX 78735 terracon.com

Aerial Photograph

Aerial Photograph: April 2021 Conifer Solar Site - Lone Tree Johnson County, Iowa

Exhibit

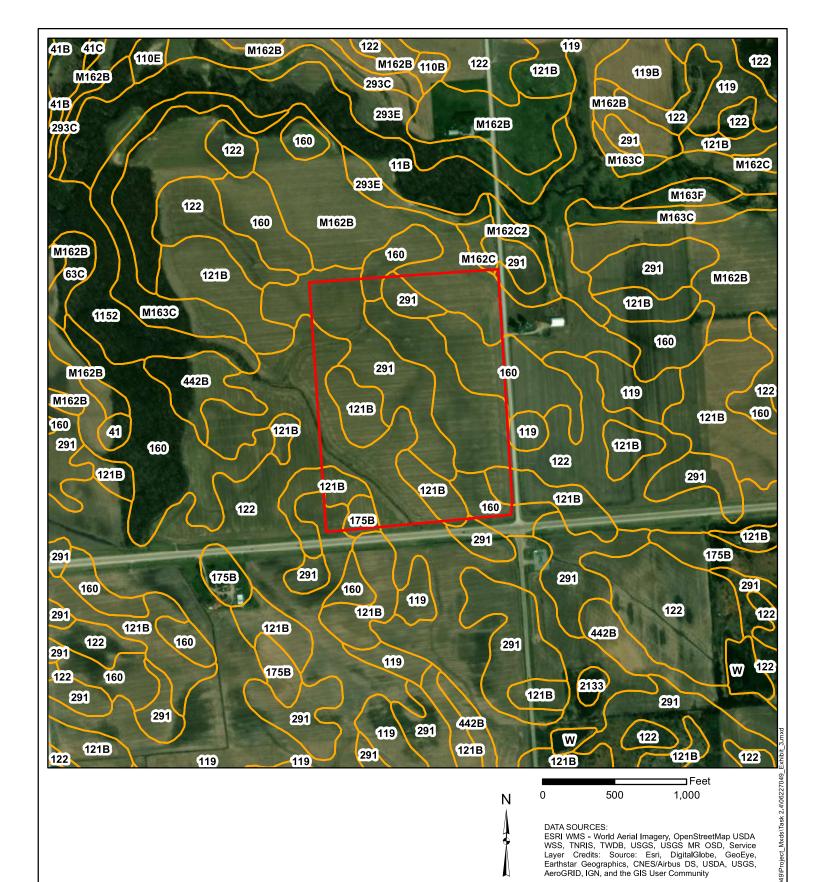

Project No.: 06227049, 2.4 Date:

4/28/2022 Drawn By:

CG

Reviewed By: AS



Austin, TX 78735

5307 Industrial Oaks Blvd. Suite 160

PH. (512) 442-1122 terracon.com

Web Soil Survey

Natural Resource Conservation Service Web Soil Survey Conifer Solar Site - Lone Tree Johnson County, Iowa

Exhibit

3

Document Path: N:\GIS\Projects\2022\06227049\Project_Mxds\Task 2.4\06227049.

PHASE I ARCHEOLOGICAL INVESTIGATION FOR A PROPOSED LONE TREE SUBSTATION LOCATION, FREMONT TOWNSHIP, JOHNSON COUNTY, IOWA

Section 1, T77N R06W

BCA 3187-2

THIS VOLUME MAY CONTAIN SITE LOCATION INFORMATION NOT FOR PUBLIC DISTRIBUTION

Prepared for PCR US Investments Corp 1334 Brittmore Road, Suite 2407 Houston, Texas 77043

> Prepared by Jeremy L. Skeens (Principal Investigator)

Bear Creek Archeology, Inc. Derek V. Lee, Director P.O. Box 347 Cresco, Iowa 52136

December 2022

MANAGEMENT SUMMARY

This report presents the results of a Phase I archeological investigation conducted for PCR US Investments Corp of Houston, Texas, by Bear Creek Archeology, Inc., of Cresco, Iowa, for a proposed Lone Tree substation location near the Iowa River valley in Johnson County, Iowa. The project area covers an undulating portion of an active agricultural field northwest of the Iowa Highway 22-Sioux Avenue intersection near Otter Creek and the Iowa River valley. Intermittent drainages cross the northwest and southwest corners of the project area. The project area is located in the E½, SE¼ of Section 1, T77N R06W, Fremont Township, Johnson County, Iowa. The total project area covers approximately 20.2 ha (49.9 ac).

No previously recorded archeological sites or historic properties/structures are located within the project area. A previous Phase I survey of the Iowa Highway 22 corridor included the south perimeter of the project area and recorded a nearby historic schoolhouse (13JH554). The archival search indicated four additional previous cultural resource investigations within 1.6 km (1 mi) of the project area. The River Junction Cemetery (52-05201) is the only inventoried historic property mapped within .8 km (.5 mi) of the project area.

Surface cover for the project area consisted of harvested corn residue with grass and trees along the drainages. Gentle to moderate slopes were common along the rolling landscape. The geomorphic evaluation identified a project area comprised mainly of eroded and/or disturbed uplands with evidence of prolonged saturation along the drainages. Relative intact soil was recorded beneath the plowzone along the drainage channel in the southwest corner. A linear rise at the south-central perimeter was comprised of deep, eolian deposits.

During the field investigation, a visual surface examination was conducted throughout the entire project area. A total of 30 shovel tests were excavated along each side of the southwest drainage channel. Nine auger tests were used to investigate the windblown deposits along the linear rise. No cultural materials were observed or collected from the project area during the investigation. No further cultural resource investigations are recommended for the identified project area.

Information contained in this report relating to the nature and location of archeological sites is considered private and confidential and nor for public disclosure in accordance with Section 304 of the National Historic Preservation Act (54 U.S.C § 307103); 36 CFR Part 800.6(a)(5) of the Advisory Council on Historic Preservation's rules implementing Sections 106 and 110 of the National Historic Preservation Act; Section 9(a) of the Archaeological Resource Protection Act (54 U.S.C. § 100707), and Chapter 22.7, subsection 20 of the Iowa Code.

TABLE OF CONTENTS

MANAGEMENT SUMMARY	i
TABLE OF CONTENTS	ii
LIST OF TABLES	iii
LIST OF FIGURES	iii
INTRODUCTION	1
PROJECT AREA LOCATION AND DESCRIPTION	
INVESTIGATION PREMISES	
GENERAL INVESTIGATION METHODOLOGY	
ENVIRONMENTAL CONTEXT AND LANDFORM MODELS	
Physiographic Region	
Upland Landform Model	
Project Area Soil and Landscape Analysis	
ARCHIVAL REVIEW RESULTS	
Previously Recorded Sites, Properties/Structures, and Surveys	6
Historic Maps and Aerial Photographs	
SURVEY RESULTS	7
Geomorphic Evaluation	7
Archeological Survey	8
SUMMARY AND RECOMMENDATIONS	
REFERENCES CITED	
FIGURES	
APPENDIX A: Soil Profiles	
APPENDIX B: National Archaeological Database Form	47

LIST OF TABLES

Table 1. Mapped soil types within the project area	4
Table 2. Previously conducted archeological surveys within 1.6 km (1 mi) of the	
project area	6
LIST OF FIGURES	
LIST OF FIGURES	
Figure 1. Physiographic location of the project area	15
Figure 2. Topographic coverage of the project area	16
Figure 3. Scale map of the project area	17
Figure 4. Diagram of potential landform components	18
Figure 5. Soil map of the project area	19
Figure 6. Lidar image of the project area	20
Figure 7. 1841 map of the project area	21
Figure 8. 1870 map of the project area	22
Figure 9. 1875 map of the project area	23
Figure 10 1889 map of the project area	24
Figure 11. 1900 map of the project area	25
Figure 12 1917 map of the project area	26
Figure 13. 1937 aerial photograph of the project area	27
Figure 14. 1951 aerial photograph of the project area	28
Figure 15. 1963 aerial photograph of the project area	29
Figure 16. 1983 aerial photograph of the project area	30
Figure 17. Project area from the northwest corner. View to the east	31
Figure 18. Project area from the northeast corner. View to the south	31
Figure 19. Project area from the southeast corner. View to the north	32
Figure 20. Project area from the southwest corner. View to the northeast	32
Figure 21. Linear rise along the south-central perimeter of the project area. View	
to the north-northeast	33
Figure 22. Intermittent drainage in the northwest corner of the project area. View	
to the east	34
Figure 23. Intermittent drainage in the southwest corner of the project area. View	
to the northwest	
Figure 24. Soil Profile 1, 0–34 cm.	35
Figure 25. Soil Profile 1, 34–61 cm	35
Figure 26. Soil Profile 2, 0–34 cm.	36
Figure 27. Soil Profile 2, 34–65 cm	36
Figure 28. Soil Profile 2, 65–99 cm	37
Figure 29. Soil Profile 3, 0–34 cm	
Figure 30. Soil Profile 3, 34–62 cm	38
Figure 31. Soil Profile 4, 0–34 cm.	39

LIST OF FIGURES, continued

Figure 32. Soil Profile 4, 34–65 cm	39
Figure 33. Soil Profile 5, 0–33 cm	40
Figure 34. Soil Profile 6, 0–34 cm	41
Figure 35. Soil Profile 6, 34–69 cm	41
Figure 36. Soil Profile 6, 102–130 cm	42
Figure 37. Typical ground surface visibility (50–70%) in the project area	43
Figure 38. Typical ground surface visibility (70–90%) in the project area	43
Figure 39. Pedestrian survey of the project area. View to the east	44
Figure 40. Auger testing near the south-central perimeter of the project area. View	
to the northwest	44
Figure 41. Shovel testing along the drainage channel in the southwest corner of the	
project area. View to the northwest	45

INTRODUCTION

The following report presents the results of a Phase I archeological investigation conducted for PCR US Investments Corp of Houston, Texas, by Bear Creek Archeology, Inc. (BCA) of Cresco, Iowa, for a proposed Lone Tree substation location near the Iowa River valley in Johnson County, Iowa. The Phase I archeological survey was conducted in accordance with the National Historic Preservation Act (Advisory Council on Historic Preservation 2004, 2016) and the Secretary of the Interior's standards for the identification of historic properties (National Park Service [NPS] 1983). The investigation meets or exceeds the guidelines for Iowa archeological investigations offered by the Association of Iowa Archaeologists (AIA; 2021). The fieldwork for this investigation was conducted by BCA personnel in November 2022. The fieldwork, data analyses, and report production were completed by BCA personnel under the supervision of the Principal Investigator. The resulting field notes and other records generated by BCA during this project are housed at BCA's office in Cresco, Iowa.

PROJECT LOCATION AND DESCRIPTION

Positioned in the Southern Iowa Drift Plain physiographic region (Prior 1991; Figure 1), the project area encompasses an undulating portion of an active agricultural field northwest of the Iowa Highway 22-Sioux Avenue intersection. Intermittent drainages cross the northwest and southwest corners of the project area The project area occurs approximately .6 km (.4 mi) east of the Iowa River valley and 125 m (410 ft) south of Otter Creek. The project area is located in the E½ SE¼ of Section 1, T77N R06W, Fremont Township, Johnson County, Iowa (Figures 2 and 3). The total project area covers approximately 20.2 ha (49.9 ac).

INVESTIGATION PREMISES

The purpose of this investigation is to document the cultural resources within the project area at the Phase I level of investigation. The goals of the Phase I survey are based on the Secretary of the Interior's Standards and Guidelines for the Identification of Archeological Properties (NPS 1983:44716–44728). These standards are summarized and annotated within the archeological guidelines for Iowa (AIA 2021). Phase I surveys are intended to provide basic data on the occurrence, location, and identification of cultural resources within a given area.

The survey strategy of this Phase I investigation was based on an analysis of the project area and the landforms that exist within it. Archeological sites are integrated into the environment by natural processes and may be viewed not only as cultural remains, but also as geological deposits. The geographic and pedologic character of a region is conditioned

by geological processes, and an awareness of these processes is fundamental to any evaluation of the archeological record. Landform and soil attributes have a strong influence on the presence, absence, and distribution of the plant and animal populations utilized by human groups. Geological processes affect not only the patterns of human habitation and environmental exploitation, but they are also largely responsible for the preservation, destruction, and manipulation of the archeological record. Therefore, archeological sites should be viewed as a product of both cultural and geological processes (Bettis and Green 1991).

This perspective on site location takes into account both the geological processes and cultural interactions of an area, allowing archeologists to use landform modeling to predict site occurrence and patterned distributions within a given region (Bettis and Benn 1984; Bettis and Thompson 1981). Such an approach also proves useful in investigator recognition of post-settlement alluvium (PSA), made land, plowzones, and other disturbances that may have modified the area under investigation.

As a tool of cultural resource management, this type of landform modeling is critical to the development and implementation of survey strategies. More sensitive strategies toward geomorphological context allow the investigator to focus on those areas where the probabilities of site occurrence are highest. This reduces or eliminates the cost of surveying areas where sites should not sensibly occur in situ (e.g., made land, heavily disturbed areas, and landforms consisting entirely of recent alluvium, etc.). Informed survey strategies such as the one outlined above allow for the determination of the depth and distribution of subsurface tests necessary for the detection of buried cultural resource deposits. Additionally, the nature of the proposed impacts can be assessed in terms of the landforms present.

GENERAL INVESTIGATION METHODOLOGY

Prior to beginning the fieldwork, on-line site and previous survey records at the Office of the State Archaeologist (OSA) in Iowa City were examined to determine if previously reported properties are recorded within or near the project area. To check for non-extant structures, digital copies of the nineteenth century General Land Office (GLO) map, historic plat maps, and aerial photographs stored on the BCA server were also consulted.

Also preceding the fieldwork, a brief geomorphic review was conducted to assess the general landform context of the survey area. A ¾" cm hand probe was used to inspect subsurface deposits and monitor the depth of the plowzone and other modern impacts. Representative soil profiles were recorded for various landscape positions, supplemented by visual assessments of the project area. Upon completion of this assessment, the site discovery stage utilized the excavation of subsurface shovel and auger tests on those landforms determined by the geomorphic evaluation to have suitable potential for cultural materials coupled with either low surface visibility and/or the presence of an intact soil stratigraphy. When undertaken, subsurface tests were advanced at 10–15 m (32.8–49.2 ft)

intervals, with the removed matrix screened through one-quarter inch hardware mesh. Each shovel test was a minimum of 35 cm in diameter, while bucket auger tests had a minimum diameter of 20 cm. Subsurface tests were advanced to a maximum depth of 140 cm below surface, or well into the subsoil (i.e., Bt or E/Bt horizon). All tests were backfilled.

ENVIRONMENTAL CONTEXT AND LANDFORM MODELS

Physiographic Region

The project area is located in east-central Iowa within the Southern Iowa Drift Plain physiographic region (Prior 1991; Figure 1). Although the Southern Iowa Drift Plain was not glaciated during the Wisconsinan glacial stage, this region saw repeated earlier glacial events broadly identified as the Illinoian (confined to the eastern margins of the region) and Pre-Illinoian (comprised of multiple glacial and interglacial stages covering the entire region) epochs that deposited thick glacial drift (till) across the entire landscape (Prior 1991). In most places the till is blanketed by Wisconsinan-age loess (Prior 1991) although, as noted in soil surveys from the region, heavy erosion on steeper sideslopes sometimes expose remnants of a paleosol formed on the glacial drift. Exposed sporadically in larger stream valleys and deeper ravines, Mississippian bedrock is present below the till in the southeastern part of the state with isolated outcrops of Pennsylvanian-age coal also reported. Since the end of the Illinoian glacial stage in southern Iowa, approximately 500,000 years ago, the Southern Iowa Drift Plain has been exposed to stream erosion, weathering processes, soil development, loess deposition, and hillslope evolution resulting in a well-integrated drainage network and multi-stepped erosional surfaces. Topographic features include mostly level upland divides and plateaus, steeply rolling hills, narrow interfluves, and alluvial lowlands (Bettis and Littke 1987; Prior 1991). Due to the age of the sediments (Bettis and Littke 1987), archeological sites in the uplands are limited to the near surface and are commonly incorporated into the plowzone in agricultural fields.

Upland Landform Model

The upland landform model (Figure 4) used in this report is based on Ruhe's (1969) analysis of hillslope evolution detailing the erosional and depositional sequences of upland components. Hillslopes are divided into five components (listed in descending order): summit, shoulder, sideslope, footslope, and toeslope. Not all components, however, may be present on a given hillslope.

Summits comprise the upper portion of the uplands and tend to be stable but are subjected to minor deposition and erosion by eolian processes. Shoulders form by the gradual back cutting of hillslopes at summit margins and are generally convex in cross-section with a low degree of slope. Comprised of backslope, headslope, and noseslope subcomponents, sideslopes are erosional features formed by the back cutting of valley walls. Footslopes, the lower remnants of hillslopes, are eroded and often covered by colluvial deposits derived

from the shoulder and backslope. Toeslopes are found at the base of the upland landform and consist almost entirely of colluvial deposits.

Due to their low degree of erosion and relative flatness, summits and shoulders have high potential for containing prehistoric sites that, at times, may be intact and shallowly buried. Footslope and toeslope areas also have good prehistoric site potential because they represent depositional features (i.e., they are time transgressive in terms of stability), generally have a low degree of slope (Van Nest 1993) and may be relatively close to water. Sideslopes, because of their steeper inclines and higher rates of erosion, rarely contain intact prehistoric materials. Finally, historic archeological sites can be found on any upland landform component.

When using this model, it is important to account for agriculturally induced wind and water erosion. All cultivated upland components have been subjected to erosional pressures. Consequently, summit, shoulder, footslope, and toeslope positions that have undergone decades of cultivation typically possess lower potential for intact sites.

Project Area Soil and Landscape Analysis

The project area covers an undulating, loess-mantled outwash terrace near the Iowa River valley. Intermittent, upland drainages within the project area ultimately flow northwest into Otter Creek along the Iowa River valley margin. The Soil Surveys of Johnson County, Iowa (Schermerhorn 1983) and the Natural Resources Conservation Service (NRCS; 2021) map seven soil series (divided into nine soil units) within the project area (Table 1; Figure 5).

Table 1. Soil information for the project area (NRCS 2021; Schermerhorn 1983; Web Soil Survey 2022)

Symbol/Soil Name	% of Project Area	Landscape Position	Drainage Class	Parent Material	Native Vegetation
(119)	<.1	interfluves	somewhat	fine-silty loess	tall prairie grass
Muscatine silt loam, 0–2% slopes	\.1	memuves	poor	The sity locss	un prunte gruss
(121B) Tama silt loam, 2–5% slopes	15.9	interfluves	well	fine-silty loess	tall prairie grass
(122) Sperry silt loam, depressional, 0–1% slopes	37.5	interfluves	very poor	loess	herbaceous wetland plants
(160) Walford silt loam, 0–2% slopes	12.3	interfluves	poor	fine-silty loess	herbaceous/woody plants
(175B) Dickinson fine sandy loam, 2–5% slopes	2	stream terraces, dunes	well	sandy eolian deposits	tall prairie grass

Table 1, continued. Soil information for the project area (Schermerhorn 1983; NRCS 2021; Web Soil Survey 2022)

	% of Project	Landscape	Drainage		
Symbol/Soil Name	Area	Position	Class	Parent Material	Native Vegetation
(291) Atterberry silt loam, 1–3% slopes	23.8	interfluves	somewhat poor	fine-silty loess	tall prairie grass and trees
(M162B) Downs silt loam, till plain, 2–5% slopes	8.3	interfluves	well	fine-silty loess	tall prairie grass and scattered trees
(M162C) Downs silt loam, till plain, 5–9% slopes	.1	interfluves	well	fine-silty loess	tall prairie grass and scattered trees
(M162C2) Downs silt loam, till plain, 5–9% slopes, eroded	.1	interfluves	well	fine-silty loess	tall prairie grass and scattered trees

The upland summit in the northeast corner of the project area is mapped as gently to moderately (2–9%) sloped Downs silt loam (map symbols M162B, M162C, and M162C2), a small portion of which is eroded. As it occurs within the project area, the Downs soil series consists of well drained soil formed in fine-silty loess along interfluves on till plains. Approximately 38% of the project area, including the area directly adjacent the intermittent drainages, is mapped as Sperry silt loam (122), a very poorly drained soil formed in depressions along interfluves in loess. A small portion (approximately 2%) of the project area near the south perimeter is mapped as Dickinson fine sandy loam, which consists of well drained soil formed in sandy windblown deposits on stream terraces or dunes. Just over half (approximately 52%) of the project area is mapped as Muscatine (119), Tama (121B), Walford (160), and Atterberry (291) silt loams. These soil series range in drainage class from poor to well drained and are all formed in fine-silty loess along interfluves.

A review of the topographic map (Figure 2) and lidar imagery (Figure 6) indicates the project area covers a rolling outwash terrace situated above Otter Creek and the Iowa River valley. The highest elevation occurs along an upland summit along Sioux Avenue in the northeast corner of the project area. Intermittent drainages that cross the project area feed into Otter Creek at the Iowa River valley margin. The entire project area has likely been affected by prolonged use of the land for cultivation. Given the likelihood of disturbance at the surface of the agricultural field and the position of the project area along uplands near perennial waterways, the archeological potential for the project area is considered low to moderate.

While soil survey and topographic map analyses are essential at the prefield level, field investigation is necessary to determine if the reported information from these sources is accurate. Because much of the soil survey information is documented without localized field inspection and landforms are constantly evolving, one must accurately document the current landscape to determine a given project area's archeological potential.

ARCHIVAL REVIEW RESULTS

Previously Recorded Sites, Properties/Structures, and Surveys

Prior to fieldwork, information regarding previously documented archeological sites, historic properties/structures, and former surveys within or near the project area was obtained from the on-line resource managed by OSA. The archival search indicated no previously recorded archeological sites or inventoried historic properties/structures in or directly adjacent the project area. A 1986 (Jacobs) Phase I-level survey conducted prior to improvements along Iowa Highway 22 overlaps the south perimeter of the project area. The remains of a nearby historic schoolhouse (13JH554) were collected from the surface approximately .3 km (.2 mi) west of the current project area. The site was recommended for no further work. No recommendation for National Register of Historic Places (NRHP) eligibility was given at the time of the survey. This is the only archeological site on record within a 1.6 km (1 mi) radius of the project area.

River Junction Cemetery (a.k.a. Stumptown Cemetery [Site Inventory Number 52-05201]) is the only inventoried historic property mapped within .8 km (.5 mi) of the project area. The cemetery is located southwest of the project area along the east side of Otter Creek Road in Section 12, T77N R06W, Fremont Township, Johnson County. The cemetery is still in use and will not be affected by the proposed project.

Four additional previous cultural resource surveys have been conducted within a 1.6 km (1 mi) radius of the project area (Table 2). A Phase I archeological survey for a Lone Tree substation expansion project was conducted immediately southeast of the Iowa Highway 22-Sioux Avenue intersection (Butler 2011). A portion of River Junction Road was included in Phase IA investigations conducted southwest of the project area by BCA (Scott 2011a, 2011b). A Phase I survey for a small development project was also conducted southwest of the current project area (Anderson 2019). No new sites were recorded as a result of the nearby investigations.

T 11 0	D ' 1	1 , 1	1 1 ' '	1 1.1 1	1 / 1	/1 ·\	C .1
Table 7	Previously	conducted	archeologica	CHEVANC WITHIN	1 6 km	(m1)	of the project area.
raute 4.	I IC VIOUSIV	Conducted	archeorogica	i sui vovs wiumii	I.U KIII	(111111)	of the broket area.

R&C/Report #	Investigation Type	Results	Reference
19860700024*	Phase I	two new sites, including nearby 13JH554	Jacobs 1986
20040500153	Phase I	no sites	Butler 2011
BCA 1790a	Phase IA	no new sites	Scott 2011a
BCA 1820a	Phase IA	no new sites	Scott 2011b
TR 1065	Phase I	no sites	Anderson 2019

^{*}overlaps the project area

Historic Maps and Aerial Photographs

An 1841 GLO map, 1875 statewide atlas, and four additional late nineteenth to early twentieth century historic plat maps were used to determine if documented historic buildings or structures once existed within the project area (Andreas 1875; GLO 1841;

Geographic Publishing Company 1917; Huebinger 1900; Novak 1889; Thompson and Everts 1870; Figures 7–12). Historic and modern aerial photographs were reviewed to determine if any potential historic buildings or structures were located in the project area and to gain a better understanding of the land use practices within the project area since 1937 (Figures 13–16).

The 1841 GLO map does not indicate the presence of any historic buildings or structures (Figure 7). Though no potential structures occur within the project boundaries, a schoolhouse (13JH554) is illustrated west of the project area on all of the subsequent historic maps (Andreas 1875; GLO 1841; Geographic Publishing Company 1917; Huebinger 1900; Novak 1889; Thompson and Everts 1870; Figures 8–12). The early aerial photographs show most of the project area utilized as agricultural land, with a minimal amount of timber along the northeast perimeter. The drainage channel is visible along the southwest corner (Figures 13 and 14). Instances of channelization along the southwest drainage channel can be seen in the 1963 and 1983 aerial photographs. By 1983, the wooded northeast perimeter was converted to agricultural land (Figures 15 and 16).

While historic plat maps and aerial images can provide a wealth of information regarding historic properties, structures may exist that were not recorded and those that are recorded can occur in a different location than that depicted. It is for these reasons that historic plat maps must be substantiated through field investigation.

SURVEY RESULTS

Geomorphic Evaluation

To begin the investigation, a geomorphic evaluation was conducted across the project area. Based on the landscape evaluation, the project area generally includes a portion of a level to moderately (0–9%) sloped outwash terrace near Otter Creek and the Iowa River valley. Intermittent drainages associated with Otter Creek occur in the west half of the project area. Based on the soil data, there is the potential for eolian deposits near the south perimeter. The uplands throughout the project area are expected to be eroded and/or disturbed by long-term agricultural use and alteration of the drainage channel in the southwest corner. The geomorphic evaluation utilized visual assessments and the extraction of seven hand probes, resulting in six representative profiles. Landforms and soil profile locations are reproduced in Figure 3. Soil profiles (SPs) are presented in Appendix A.

The project area is situated in an active agricultural field along an undulating outwash terrace. The steepest slopes (5–9%) occur along a rise in the northeast corner near Sioux Avenue and a linear rise at the south-central perimeter. Intermittent drainages cross the northwest and southwest corners (Figures 17–23). Soil along the northwest drainageway floor was found to be disturbed/eroded and poorly drained, with a shallow plowzone directly overlaying gleyed Bt horizons (Figures 24 and 25; SP 1). The partially intact remnant of an A horizon was recorded below the disturbed plowzone near the southwest

drainage channel. The relatively intact silt loam quickly transitioned to the moderately well developed and poorly drained subsoil at this location (Figures 26–28; SP 2). Near level positions across most of the outwash terrace consisted of a disturbed plowzone extending to approximately 25 cm. The underlying silty clay loam became more well developed with depth (Figures 29–32; SPs 3 and 4). The higher summit in the northeast corner was heavily eroded and disturbed at the surface (Figure 33; SP 5). A soil probe utilized along the linear rise extending from the south-central perimeter revealed deep, fine sand horizons deposited by wind. Disturbance from long-term agricultural use was noted at the surface (Figures 34–36; SP 6).

Many of the upland landforms possess low potential of containing in situ archeological deposits due to disturbance caused by ongoing cultivational use and erosion, as well as evidence of prolonged saturation. There is low to moderate potential for archeological deposits along the southwest drainage channel based on the relatively intact surficial deposits observed beneath the plowzone during the geomorphic evaluation. Intact cultural deposits could also be encountered along the south-central linear rise due to the depositional nature of the eolian deposits that occur along the landform. Based on the results of this evaluation, subsurface testing will focus on these positions in the south portion of the project area. Cultural material should be expressed at or near the surface of the active agricultural field throughout the remainder of the project area and a visual surface inspection will be conducted.

Archeological Survey

The survey strategy utilized for this investigation was determined by the results of the archival review, conditions observed in the field, geomorphic investigation, and the potential of a given landform to contain cultural resources. For the purposes of site discovery and evaluation, a visual surface inspection was implemented throughout the project area. Systematic subsurface testing was employed along the drainage channel in the southwest corner, as well as the near level summit of a linear rise in the south-central portion of the project area, based on soil observed during the geomorphic evaluation. During the initial site discovery stage, a total of 30 shovel tests and nine bucket auger tests were excavated.

At the time of the investigation, nearly all of the project area was covered in harvested corn residue (50–90% ground surface visibility [GSV]; Figures 37 and 38). A minimal amount of grass and small trees (<10% GSV) were present along the drainages in the northwest and southwest corners. Based on the adequate surface visibility and the disturbed plowzone recorded during the geomorphic evaluation (Appendix A: SPs 3–5), the investigation began with a pedestrian survey initiated at 5 m intervals throughout the entire project area (Figure 39). No cultural material was present along the surface of the harvested field.

Subsurface testing began with a series of auger tests (n = 9) placed at 15 m intervals along the summit of the linear rise in the south-central portion of the project area (Figure 40). Due to the depositional nature of eolian deposits, cultural material could be encountered

within the weakly structured, sandy B horizons found along the landform. Therefore, the auger tests placed on the rise were excavated through the Bw horizons and into the underlying E/Bt horizon to approximate depths of 100–140 cm. The three northernmost test locations consisted of disturbed soil with an Ap-Bw-Bt profile that was typical for most of the outwash terrace within the project area (Appendix A: SPs 3–5). These three tests ended at approximate depths of 40–55 cm, or 20 cm into the sterile subsoil. Two parallel transects of shovel tests were placed at 10–15 m intervals along the edges of the drainage channel in the southwest corner (Figure 41). The intact A horizon remnant was found at many of the test locations along the channel, excluding only the northwest and southeast ends of the transects where the typical Ap-Bw-Bt profile was observed. The Btg horizon was encountered at 30–55 cm during shovel testing and tests concluded at approximately 50–75 cm in depth. No cultural material was observed or collected from any of the subsurface test locations in the project area.

SUMMARY AND RECOMMENDATIONS

The preceding report presents the results of a Phase I archeological investigation conducted across the project area for a proposed Lone Tree substation location in Johnson County. The project area exists within an active agricultural field along a loess-mantled outwash terrace near Otter Creek and the Iowa River valley. No previously recorded archeological sites or historic properties/structures are located within the project area. A previous Phase I survey of the Iowa Highway 22 corridor included the south perimeter of the project area and recorded a nearby historic schoolhouse (13JH554). The archival search indicated four additional previous cultural resource investigations within 1.6 km (1 mi) of the project area. The River Junction Cemetery (52-05201) is the only inventoried historic property mapped within .8 km (.5 mi) of the project area.

Surface cover for the project area consisted of harvested corn residue (30–50% GSV) with grass and trees (<10% GSV) along the drainages. Gentle to moderate slopes were common along the rolling landscape. The geomorphic evaluation identified a project area comprised mainly of eroded and/or disturbed uplands with evidence of prolonged saturation along the drainages. Relative intact soil was recorded beneath the plowzone along the drainage channel in the southwest corner. A linear rise at the south-central perimeter was comprised of deep, eolian deposits.

During the field investigation, a visual surface examination was conducted throughout the entire project area. A total of 30 shovel tests were excavated along each side of the southwest drainage channel. Nine auger tests were used to investigate the windblown deposits along the linear rise. No cultural materials were observed or collected from the project area during the investigation. No further cultural resource investigations are recommended for the identified project area.

No technique of modern archeological research is adequate to identify all archeological sites or cultural deposits within a given area. In the event that any cultural materials not

recorded by this investigation are discovered in the course of the proposed development activities, the State Historic Preservation Office should be contacted immediately. It is the responsibility of the developer to protect cultural resources from disturbance until a professional examination can be made or authorization to proceed is granted by the State Historic Preservation Office or a designated representative.

Information contained in this report relating to the nature and location of archeological sites is considered private and confidential and not for public disclosure in accordance with Section 304 of the National Historic Preservation Act (54 U.S.C § 307103); 36 CFR Part 800.6(a)(5) of the Advisory Council on Historic Preservation's rules implementing Sections 106 and 110 of the National Historic Preservation Act; Section 9(a) of the Archaeological Resource Protection Act (54 U.S.C. § 100707), and Chapter 22.7, subsection 20 of the Iowa Code.

REFERENCES CITED

Advisory Council on Historic Preservation (ACHP)

- 2004 36 CFR Part 800, Protection of Historic Properties, as Amended. Electronic document http://www.achp.gov/regs.html, accessed November 2022.
- 2016 National Historic Preservation Act of 1966, as Amended. Electronic document http://www.achp.gov/nhpa.html, accessed November 2022.

Anderson, Mark L.

2019 Phase I Intensive Archaeological Investigation of the Proposed Utsler Development Project, Section 12, T77N-R6W, Johnson County, Iowa. TR 1065. Office of the State Archaeologist, University of Iowa, Iowa City.

Andreas, Alfred T.

1875 Illustrated Historical Atlas of the State of Iowa. Andreas Atlas Company, Chicago.

Association of Iowa Archaeologists (AIA)

2021 Guidelines for Archaeological Investigations in Iowa. Electronic document, http://aiarchaeologist.org/guidelines/, accessed November 2022.

Bettis, E. Arthur, III, and David W. Benn

1984 An Archeological and Geomorphological Survey in the Central Des Moines River Valley, Iowa. *Plains Anthropologist* 29:211–227.

Bettis, E. Arthur, III, and William Green

1991 Part I: Grandview to Kingston. In *Paleoenvironments and Archaeology of the Mississippi Valley in Southeastern Iowa*. Prepared for the Annual Meeting of the Association of Iowa Archaeologists, Burlington.

Bettis, E. Arthur, III, and John P. Littke

1987 Holocene Alluvial Stratigraphy and Landscape Development in Soap Creek Watershed Appanoose, Davis, Monroe, and Wapello County, Iowa. Contribution No. 14 Iowa Quaternary Studies Group, Geological Survey Bureau, Iowa City.

Bettis, E. Arthur, III, and Dean M. Thompson

1981 Holocene Landscape Evolution in Western Iowa: Concepts, Methods, and Implications for Archaeology. In *Current Directions in Midwestern Archaeology: Selected Papers from the Mankato Conference*, edited by Scott Anfinson, pp. 1–14. Occasional Publications in Minnesota Anthropology No. 9. Minnesota Archeological Society, St. Paul.

Butler, Todd L.

2011 Phase I Archaeological Investigation of the Lone Tree Substation Expansion Project, Johnson County, Iowa. The Louis Berger Group, Inc., Marion, Iowa.

General Land Office (GLO)

1841 Secretary of State Land Survey Records: Description of the Lands on the Interior Sectional Lines. T77N, R06W. On file, State Historical Society Library, Iowa City.

Geographic Publishing Company

1917 Atlas of Johnson County, Iowa. Geographic Publishing Company, Chicago.

Huebinger, M.

1900 Atlas of Johnson County, Iowa. Huebinger Survey and Map Publishing Company, Davenport, Iowa.

Jacobs, LuAnn H.

1986 A Phase I Archaeological Survey of Primary Roads Project BRF-F-232-2(20)—2G-92, a.k.a. FR-22-2(20)—2G-92, Washington and Johnson Counties, Iowa. Iowa Department of Transportation Project Completion Report 9(89). Office of the State Archaeologist, University of Iowa, Iowa City.

National Park Service (NPS)

1983 Archeology and Historic Preservation: The Secretary of the Interior's Standards and Guidelines for Preservation Planning, Identification, Evaluation, and Registration. *Federal Register* 48:44716–44728. Electronic document, http://www.nps.gov/history/local-law/arch_stnds_0.htm, accessed November 2022.

Natural Resources Conservation Service (NRCS)

2021 Soil Survey of Johnson County, Iowa. U.S. Department of Agriculture, Washington, DC. Electronic document, http://datagateway.nrcs.usda.gov, downloaded July 2021.

Novak, J.J.

1889 Novak's New Map of Johnson County, Iowa. Rand McNally and Company, Chicago.

Prior, Jean C.

1991 Landforms of Iowa. University of Iowa Press, Iowa City.

Ruhe, Robert V.

1969 Quaternary Landscapes in Iowa. Iowa State University Press, Ames.

Schermerhorn, Edward J.

1983 *Soil Survey of Johnson County, Iowa*. U.S. Department of Agriculture, Iowa Agriculture and Experiment Station, U.S. Government Printing Office, Washington, DC.

Scott, Branden K.

- 2011a Phase IA Due Diligence Investigation for Approximately 165.2 km (102.7 mi) of New Fiber Optic Lines (IA1121-B39) within Existing Disturbed Public Rights-of-Way Throughout the State of Iowa. BCA 1790a. Bear Creek Archeology, Inc., Cresco, Iowa.
- 2011b Phase IA Reconnaissance Investigation for Approximately 35.3 km (21.9 mi) and a Desktop Assessment of Approximately 4.8 km (3.0 mi) of New Fiber Optic Lines (IA1121-B39) within Existing Disturbed Rights-of-Way along 18 Segments throughout the State of Iowa. BCA 1820a. Bear Creek Archeology, Inc., Cresco, Iowa.

Thompson and Everts

1870 Combination Atlas Map of Johnson County, Iowa. Thompson and Everts, Geneva, Illinois.

Van Nest, Julieann

1993 Geoarchaeology of Dissected Loess Uplands in Western Illinois. *Geoarchaeology* 8:281–311.

Web Soil Survey

2022 Web Soil Survey. Electronic document, https://websoilsurvey.nrcs.usda .gov/app/, accessed November 2022.

FIGURES

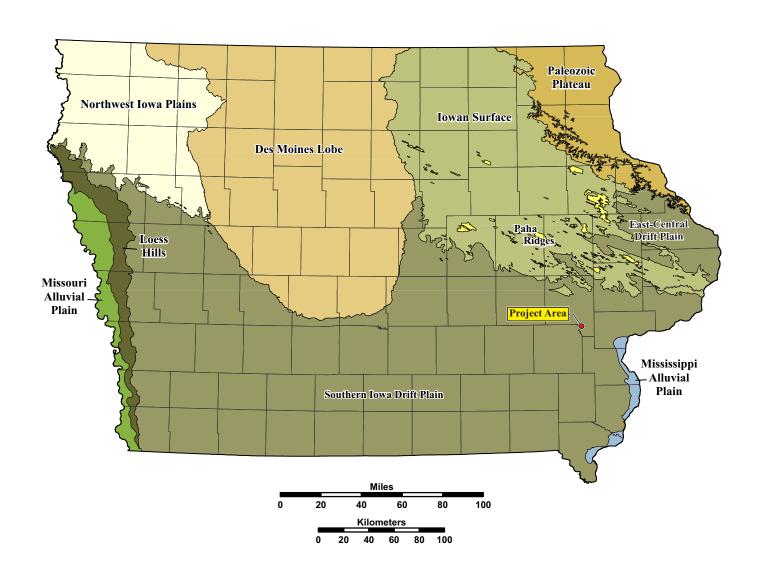


Figure 1. Physiographic location of the project area (adapted from Prior [1991:31]).

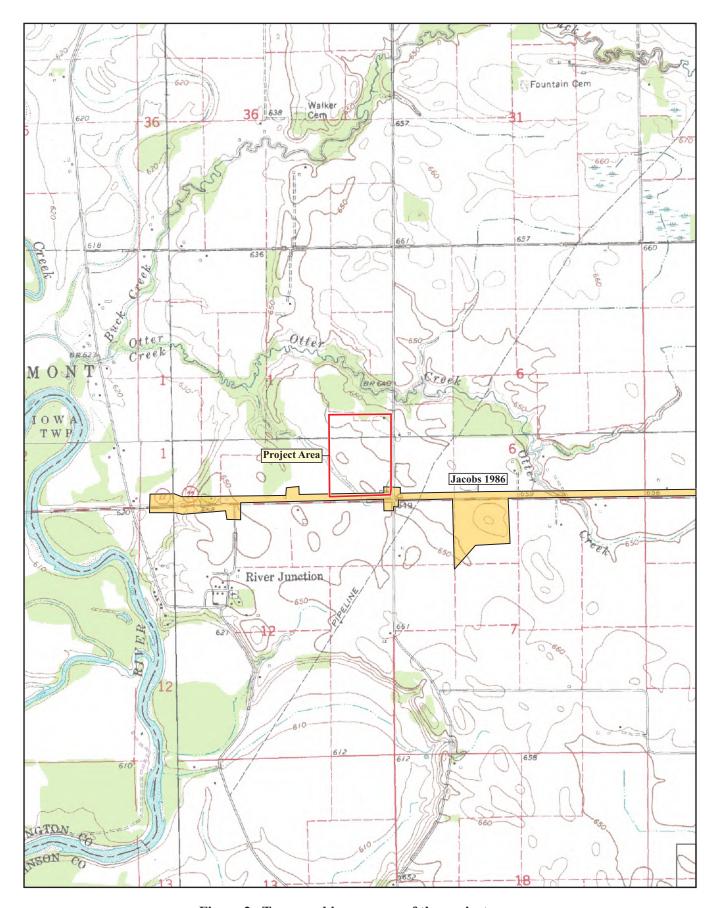


Figure 2. Topographic coverage of the project area.



Figure 3. Scale map of the project area.

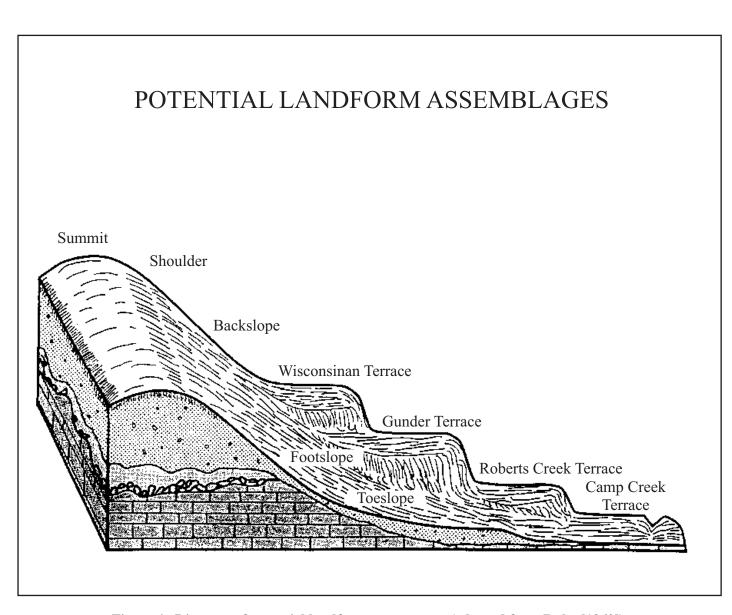


Figure 4. Diagram of potential landform components (adapted from Ruhe [1969]).

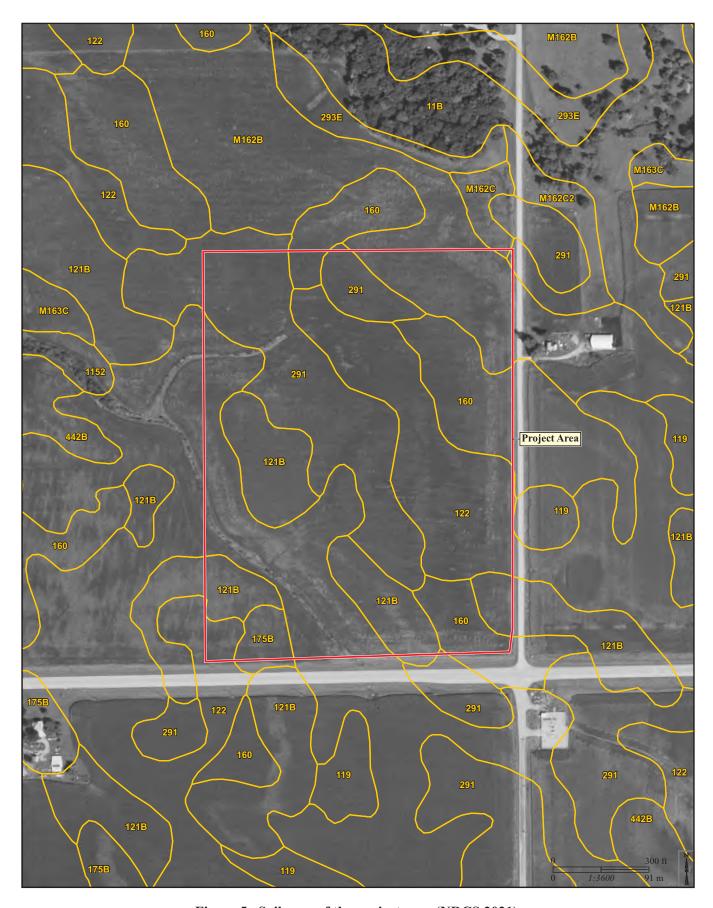


Figure 5. Soil map of the project area (NRCS 2021).

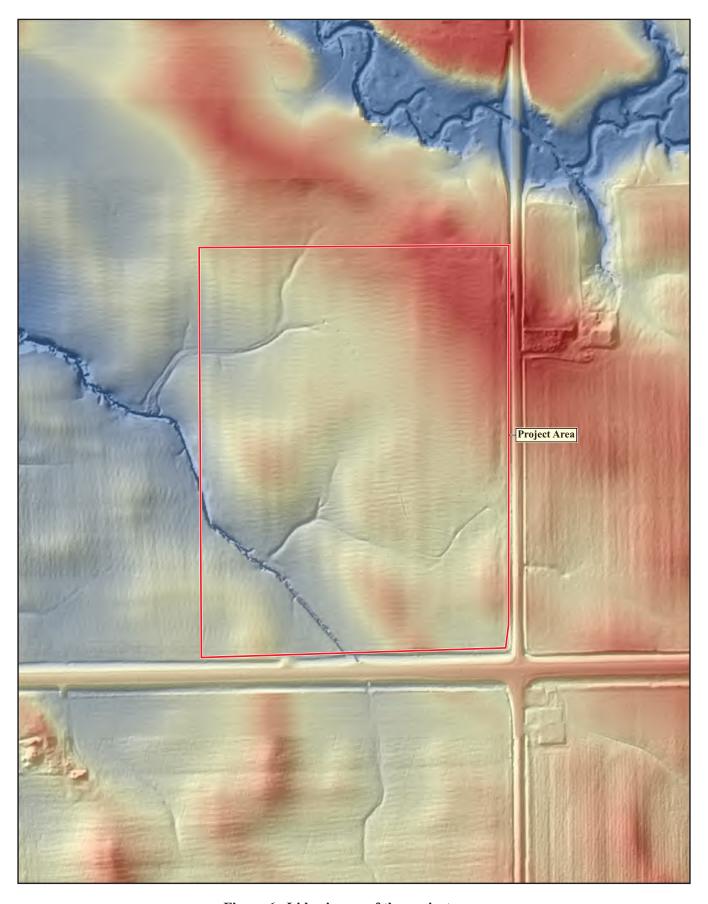


Figure 6. Lidar image of the project area.

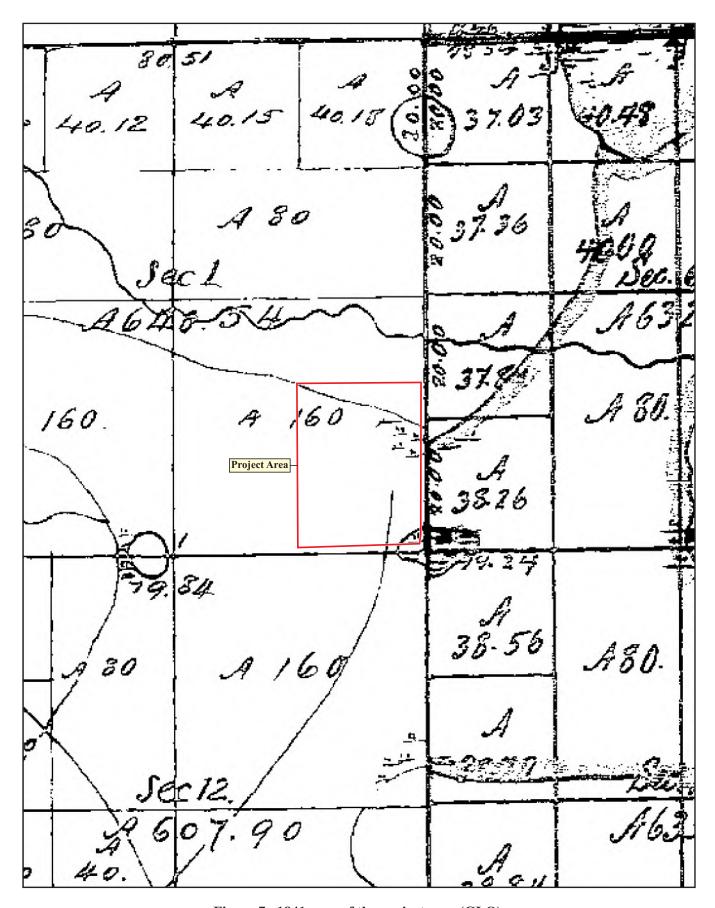


Figure 7. 1841 map of the project area (GLO).

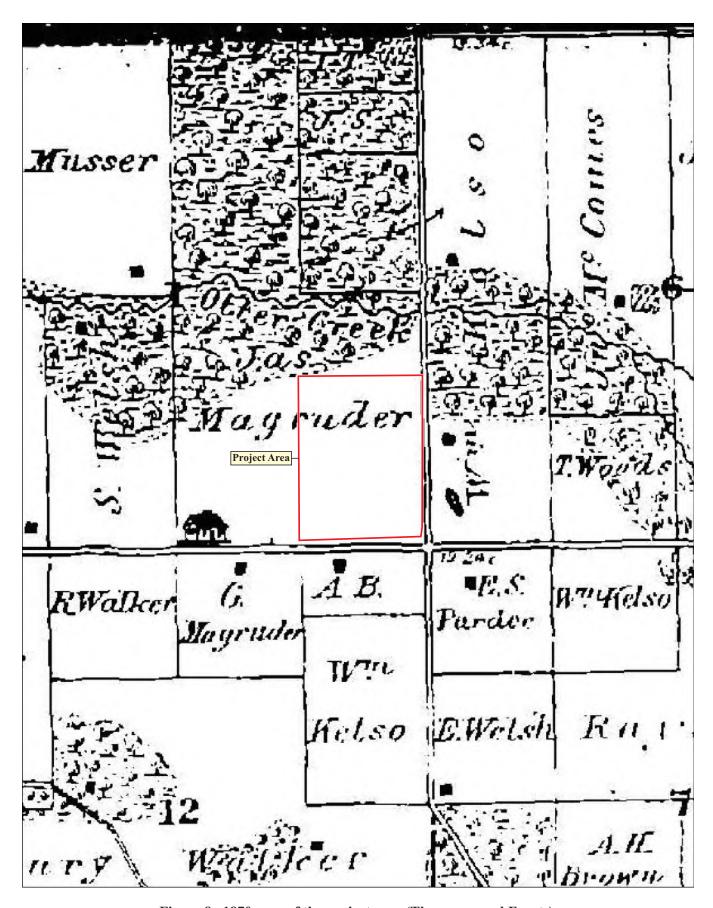


Figure 8. 1870 map of the project area (Thompson and Everts).



Figure 9. 1875 map of the project area (Andreas).

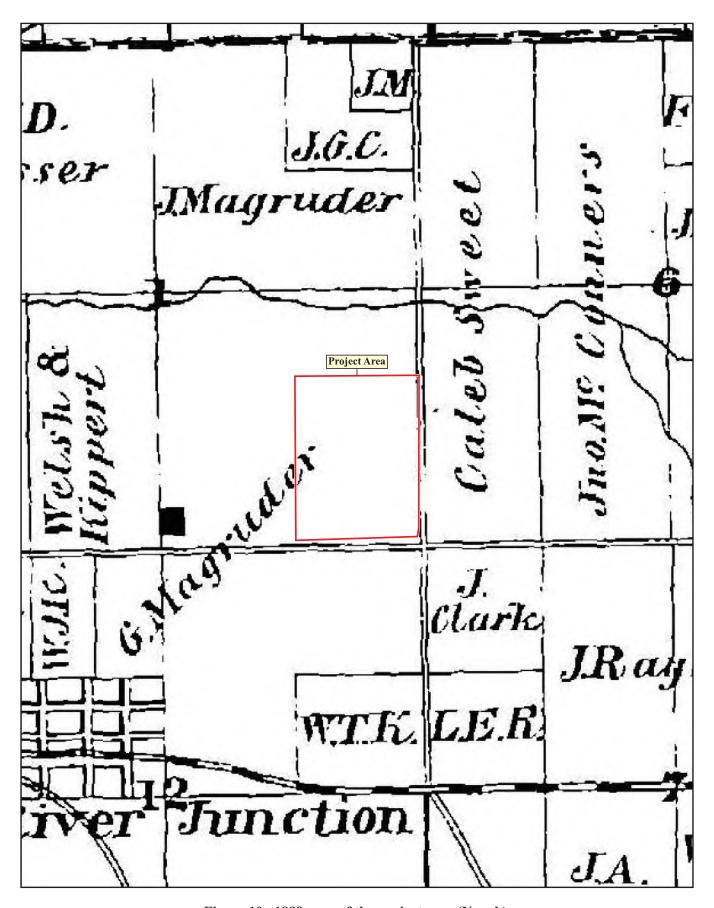


Figure 10. 1889 map of the project area (Novak).

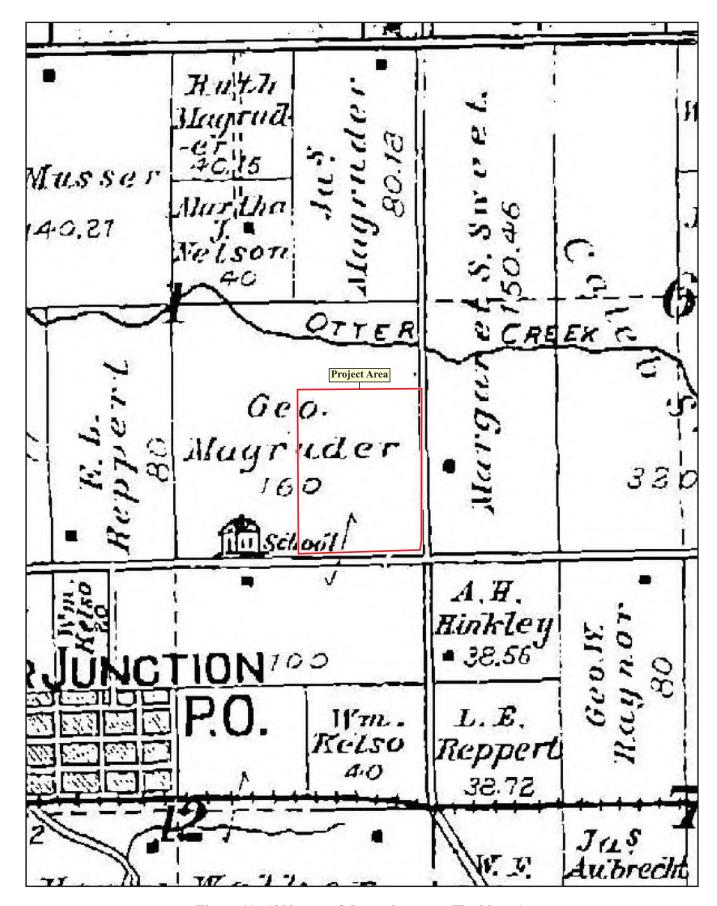


Figure 11. 1900 map of the project area (Huebinger).

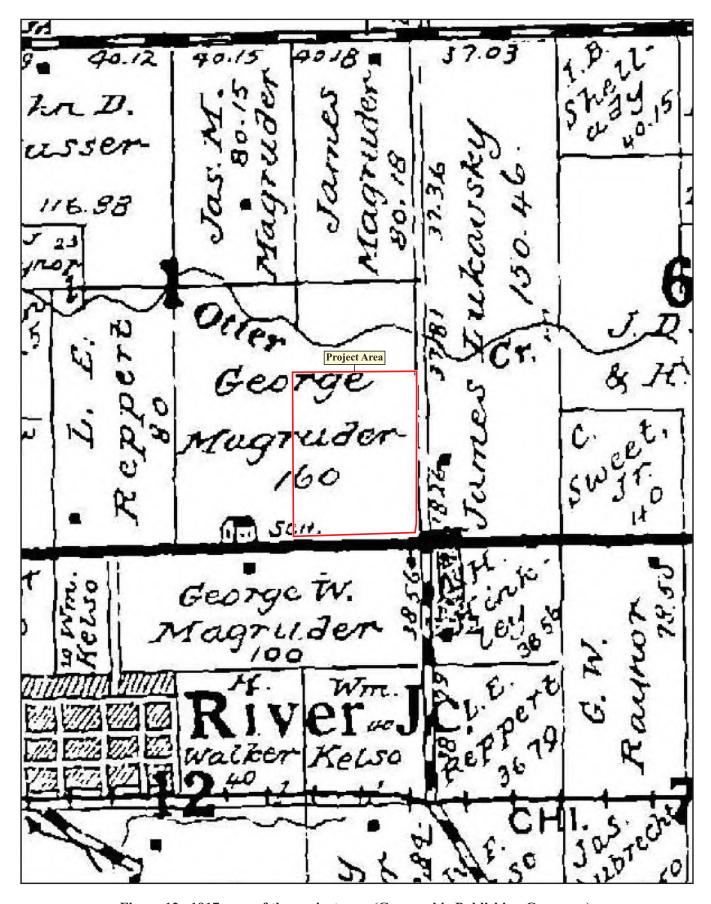


Figure 12. 1917 map of the project area (Geographic Publishing Company).



Figure 13. 1937 aerial photograph of the project area.



Figure 14. 1951 aerial photograph of the project area.



Figure 15. 1963 aerial photograph of the project area.



Figure 16. 1983 aerial photograph of the project area.



Figure 17. Project area from the northwest corner. View to the east (11/22/22).



Figure 18. Project area from the northeast corner. View to the south (11/22/22).



Figure 19. Project area from the southeast corner. View to the north (11/22/22).



Figure 20. Project area from the southwest corner. View to the northeast (11/22/22).



Figure 21. Linear rise along the south-central perimeter of the project area. View to the north-northeast (11/22/22).



Figure 22. Intermittent drainage in the northwest corner of the project area. View to the east (11/22/22).



Figure 23. Intermittent drainage in the southwest corner of the project area. View to the northwest (11/22/22).



Figure 24. Soil Profile 1, 0-34 cm (11/22/22).



Figure 25. Soil Profile 1, 34-61 cm (11/22/22).



Figure 26. Soil Profile 2, 0-34 cm (11/22/22).



Figure 27. Soil Profile 2, 34-65 cm (11/22/22).



Figure 28. Soil Profile 2, 65-99 cm (11/22/22).



Figure 29. Soil Profile 3, 0-34 cm (11/22/22).



Figure 30. Soil Profile 3, 34-62 cm (11/22/22).



Figure 31. Soil Profile 4, 0-34 cm (11/22/22).



Figure 32. Soil Profile 4, 34-65 cm (11/22/22).



Figure 33. Soil Profile 5, 0-33 cm (11/22/22).



Figure 34. Soil Profile 6, 0-34 cm (11/22/22).



Figure 35. Soil Profile 6, 34-69 cm (11/22/22).



Figure 36. Soil Profile 6, 102-130 cm (11/22/22).



Figure 37. Typical ground surface visibility (50-70%) in the project area (11/22/22).



Figure 38. Typical ground surface visibility (70-90%) in the project area (11/22/22).



Figure 39. Pedestrian survey of the project area. View to the east (11/22/22).



Figure 40. Auger testing near the south-central perimeter of the project area. View to the northwest (11/22/22).



Figure 41. Shovel testing along the drainage channel in the southwest corner of the project area. View to the northwest (11/22/22).

APPENDIX A Soil Profiles

DESIGNATION: SP 1

LANDSCAPE POSITION: drainageway floor

PARENT MATERIAL: loess

VEGETATION: harvested corn residue, 50–70% ground surface visibility (GSV)

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded along the floor of an intermittent drainageway in the

northwest corner of the project area.

Depth (cm)	Soil Horizon	Description
0–19	Ap	Very dark grayish brown (2.5Y 3/2) silt loam; weak medium granular structure parting to massive; friable; few very fine strong brown (7.5YR 4/6) redoximorphic concentrations; abrupt boundary.
19–47	Btg1	Light olive brown (2.5Y 5/3) silty clay loam; weak fine and medium subangular blocky structure; firm; abundant very fine and fine strong brown (7.5YR 4/6) redoximorphic concentrations; few fine manganese concretions; discontinuous clay skins on ped faces; clear boundary.
47–85	Btg2	Light olive gray (5Y 6/2) silty clay loam; moderate medium subangular blocky structure; plastic; abundant fine strong brown (7.5Yr 5/8) redoximorphic concentrations; common fine very dark gray (5Y 3/1) concentrations; discontinuous clay skins on ped faces; gradual boundary.
85–102	Btg3	Greenish gray (10Y 6/1) silty clay loam; moderate fine to medium subangular blocky structure; plastic; abundant fine reddish yellow (7.5YR 6/8) redoximorphic concentrations; common dark gray (5Y 4/1) clay skins on ped faces. End.

DESIGNATION: SP 2

LANDSCAPE POSITION: drainageway floor

PARENT MATERIAL: loess

VEGETATION: tall prairie grass, <10% GSV

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded from a low-lying portion of the drainageway floor in the

southwest corner of the project area.

Depth (cm)	Soil Horizon	Description
0–19	Ap	Very dark gray (2.5Y 3/1) silt loam; massive; friable; few very fine roots; abrupt boundary.
19–40	A/AB	Very dark gray to dark gray (2.5Y 3/1–2.5Y 4/1) silt loam; weak fine and medium subangular blocky structure; friable; higher clay fraction with depth; common very fine strong brown (7.5YR 4/6) redoximorphic concentrations; gradual boundary.
40–73	Btg1	Light brownish gray (2.5Y 6/2) silty clay loam; moderate fine subangular blocky structure; firm; abundant fine strong brown (7.5YR 5/8) redoximorphic concentrations; very few very fine roots; gradual boundary.
73–120	Btg2	Gray (5Y 6/1) silty clay loam; moderate medium subangular blocky parting to fine prismatic structure; plastic; abundant fine strong brown to reddish yellow (7.5YR 5/8–7.5YR 6/8) redoximorphic concentrations; common fine light gray (5Y 7/1) depletions; clear boundary.

Depth (cm)	Soil Horizon	Description							
120-140	BCg	Light gray (10Y 7/1) silty clay loam; moderate medium subangular blocky structure;							
		firm; common very fine and fine strong brown (7.5YR 4/6) redoximorphic concentrations; clear boundary.							
140–159	Cg	Light gray (10YR 7/1) clay loam; massive; firm; abundant very fine and fine strong brown (7.5YR 5/8) redoximorphic concentrations. End.							

DESIGNATION: SP 3

LANDSCAPE POSITION: summit PARENT MATERIAL: loess

VEGETATION: harvested corn residue, 70-90% GSV

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded from an isolated rise near the west-central perimeter of

the project area.

Depth (cm)	Soil Horizon	Description
0–23	Ap	Very dark gray (10YR 3/1) and dark grayish brown (10YR 4/2) silt loam; massive; friable; few very fine roots; abrupt boundary.
23–43	Bw	Yellowish brown (10YR 5/4) silty clay loam; weak fine subangular blocky structure; friable to firm; few fine very dark grayish brown (10YR 3/2) concentrations; clear boundary.
43–80	Bt1	Yellowish brown to light yellowish brown (10YR 5/4–10YR 6/4) silty clay loam; weak fine and medium subangular blocky structure; firm; gradual boundary.
80–93	Bt2	Light yellowish brown to brownish yellow (10YR 6/4–10YR 6/6) silty clay loam; moderate medium subangular blocky structure; plastic; common very fine and fine strong brown (7.5YR 4/6) redoximorphic concentrations. End.

DESIGNATION: SP 4

LANDSCAPE POSITION: outwash terrace

PARENT MATERIAL: loess

VEGETATION: harvested corn residue, 50–70% GSV

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded from a level position near the center of the project area.

Depth	(cm) Soil Hor	Description
0-2	25 Ap	Very dark gray (2.5Y 3/1) silt loam; massive; friable; very few very fine roots; abrupt boundary.
25–	50 Bw	Light olive brown (2.5Y 5/3) silty clay loam; weak fine subangular blocky structure; firm; common very fine yellowish brown (10YR 5/6) redoximorphic concentrations; few fine manganese concretions; gradual boundary.
50-	75 Bt1	Light yellowish brown (2.5Y 6/3) and dark gray (2.5Y 4/1) silty clay loam; moderate fine and medium subangular blocky structure; plastic; abundant fine strong brown (7.5Yr 5/8) redoximorphic concentrations; gradual boundary.
75–	98 Bt2	Pale brown (2.5Y 7/3) clay loam; strong fine prismatic structure; plastic; abundant fine yellowish red (5YR 5/8) redoximorphic concentrations. End.

DESIGNATION: SP 5

LANDSCAPE POSITION: summit

PARENT MATERIAL: loess

VEGETATION: harvested corn residue, 70–90% GSV

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded from the highest elevation in the project area at the

northeast corner.

Depth (cm)	Soil Horizon	Description
0–15	Ap	Very dark gray (10YR 3/1) and olive brown (10YR 4/3) loam; massive; firm; abrupt boundary.
15–33	Bt	Light yellowish brown (10YR 6/4) and light olive brown (10YR 5/3) silty clay loam; moderate fine and medium subangular blocky structure; plastic; very few very fine roots. End.

DESIGNATION: SP 6

LANDSCAPE POSITION: summit PARENT MATERIAL: eolian deposits

VEGETATION: harvested corn residue, 70-90% GSV

METHOD: hand probe

DATE DESCRIBED: 11/22/2022 DESCRIBED BY: J. Skeens

COMMENTS: This profile was recorded from a linear rise extending northwest from Iowa

Highway 22 along the south-central perimeter.

Depth (cm)	Soil Horizon	Description
0–24	Ap	Very dark gray (10YR 3/1) loam; massive; friable; abrupt boundary.
24–55	Bw1	Yellowish brown (10YR 5/4) and dark grayish brown (10YR 4/2) fine sandy loam; weak fine subangular blocky structure; friable to firm; clear boundary.
55–85	Bw2	Brownish yellow (10YR 6/6) fine loamy sand; very weak medium subangular blocky structure; very friable; few very fine roots; unknown boundary.
85–129	E/Bt	Brownish yellow (10YR 6/6–10YR 6/8) fine sand; very weak medium to coarse subangular blocky structure; very friable; common fine dark gray (10YR 4/1) clay loam ribbons. End.

APPENDIX B National Archaeological Database Form

NATIONAL ARCHAEOLOGICAL DATABASE – REPORTS; DATA ENTRY FORM

1. R and C #:		
2. Authors:	Skeens, Jeremy L.	
Year of Publica 3. Title		n for a Proposed Lone Tree Substation Location, v, Iowa
4. Report Title:	BCA Reports	
	Publisher: Bear Creek Archeolog	: <u>3187-2</u> NTIS:
5. Unpublished	Sent From:	
6. Federal Age	ncy:	<u></u>
7. State: County: Town:	Iowa Johnson	
8. Work Type: 9. Keyword:	0 - Types of Resources / Features 2 - Taxonomic Names 4 - Geographic Names / Locations 6 - Project Names / Study Unit Southern Iowa Drift Plain 20.2 ha (49.9 ac) No sites	1 - Generic terms / Research Questions 3 - Artifact Types / Material Classes 5 - Time Periods 7 - Other Key Words [4]
10. UTM Zone	: 15 Easting:	Northing: Northing: Northing: Northing: Northing:
11. Township: Range:	77N 06W	

Other Publication 12. Monographs:									
	Place:								
13. Chapter:	In:		Firs	t:		_ La	ast: _		
14. Journal:	Volume:			Issue:			First:		_ Last:
15. Dissertation:	Degree:	Ph.D.	LL.D.	M.A.	M.S.	B.A.	B.S.	Institute	
16. Paper:	Meeting: Place:								
17. Other:									
18. Site #:									
_								<u> </u>	
_								<u> </u>	
_		<u> </u>							
_									
_		<u> </u>							
19. Quad Map:		est Liber ne Tree,	•	Iowa				Date	1965 1969
								<u> </u>	

June 17, 2022

PCR US Investments Corp 1334 Brittmoore Rd Ste 2407 Houston, TX 77043

C/O: Conifer Power Company

301 West Bay Street, Suite 1404 Jacksonville, Florida 32202

Attn: Steven Link

E: sl@coniferpower.com

Re: Preliminary Threatened and Endangered Species Habitat Assessment Review

Proposed Solar Location - Lone Tree

Parcel no. 1801476001

Lone Tree, Johnson County, Iowa

Terracon Project No. 06227049; Task 2.3

Dear Mr. Link:

Terracon Consultants, Inc. (Terracon is pleased to submit this preliminary threatened and endangered species (T&E) habitat assessment review to Conifer Power Company (Conifer), on behalf of PCR US Investments Corporation (the Client). These Services were conducted in general accordance with Terracon Proposal No. P06227049 dated March 31, 2022, and the updated KMZ file provided on April 14, 2022 by Conifer.

Terracon was retained to perform a preliminary habitat assessment for threatened and endangered species for the proposed 10 mega-watt solar project, hereafter referred to as the subject site. Terracon understands that Conifer is assisting the Client with preparing plans for the development of the site as a solar array and gen-tie connection to the substation in proximity to the site.

We appreciate the opportunity to provide services to Conifer and PCR. If you have questions concerning this report, or if we can assist you in any other matter, contact us at 319-366-8321.

Sincerely,

Terracon Consultants, Inc.

Lone Tree Johnson County, Iowa

June 17, 2022 Terracon Project No. 06227049



TABLE OF CONTENTS

1.0	SITE LOCATION AND PROJECT INFORMATION	1
1.1	Background	1
1.2	Scope of Services	2
2.0	THREATENED AND ENDANGERED SPECIES HABITAT REVIEW	2
2.1	UFSWS Official Species List	2
2.2	State Listed Species Review	
2.3	Soil Survey Information	
2.4	Aerial Photographs	
3.0	PRELIMINARY HABITAT INVESTIGATION FIELD SERVICES	6
3.1	Field Services	
3.2	Methods	
4.0	FINDINGS AND RECOMMENDATIONS	7
4.1	Findings	
4.2	Recommendations	8
5.0	GENERAL COMMENTS	9

Appendices:

APPENDIX A – AGENCY CORRESPONDANCE and SPECIES LISTS

APPENDIX B - AERIAL PHOTOGRAPH

APPENDIX C – PHOTOGRAPHIC DOCUMENTATION

PRELIMINARY THREATENED AND ENDANGERED SPECIES HABITAT ASSESSMENT REVIEW

Lone Tree
Highway 22 and Sioux Avenue
Lone Tree, Johnson County, Iowa

Terracon Project No. 06227049 June 17, 2022

1.0 SITE LOCATION AND PROJECT INFORMATION

Terracon understands that the Client and Conifer are preparing preliminary plans to develop the - site with an approximate 7.5 megawatt solar facility. The location of the site is indicated in the Exhibits.

1.1 Background

The Endangered Species Preservation Act (Act) serves to protect plant and animal species listed by the U.S. Fish and Wildlife Service (USFWS) as threatened or endangered of extinction. The Act allows listing of native animal species as endangered and provided means for the protection of species so listed. The Departments of Interior, Agriculture, and Defense were to seek to protect listed species and preserve the habitats of such species.

lowa laws and regulations prohibit harm to animal species and the commerce of plant species listed by the is Chapter 481B of the Code of Iowa Endangered Plants and Wildlife and the Iowa Department of Natural Resources (IDNR) as threatened or endangered of extinction (without a permit). In Illinois, Section 17 of the Illinois Natural Areas Preservation Act (525ILCS 30/17) and the Illinois Endangered Species Protection Act (520 ILCS 10/11) cover threatened, and endangered species impacts.

Lone Tree Johnson County, Iowa

June 17, 2022 Terracon Project No. 06227049



1.2 Scope of Services

This scope of services is intended to provide preliminary information that will assist the client in evaluating and complying with federal and state endangered species requirements regulated by the USFWS and the Department of Natural Resources, respectively. Absence of documented sightings on-site or in the immediate vicinity does not ensure that listed species are not present. The lack of documented sightings may indicate that the area has not been surveyed or did not previously contain habitat. This level of investigation does not provide a habitat suitability analysis for all species with the potential to be present.

Terracon assessed the potential for listed species to be impacted by eventual development of the site as follows:

A compilation and review of published and readily available resources is initially performed to preliminarily identify potential areas of interest on-site. The resources generally included aerial photographs, topographic maps, applicable federal and state threatened, and endangered species lists, designated critical habitats, other current species information, soil survey maps, and, the National Wetlands Inventory.

Terracon requested an Official Species List (List) through the USFWS Information for Planning and Consultation (IPAC) system for the project area. Terracon also utilized the Iowa Department of Natural Resources (IDNR) Threatened and Endangered webpage / Iowa Natural Areas Inventory (INAI) to evaluate the potential effect of threatened and endangered species for the site. Utilizing the Iowa DNR Permit and Environmental Review Management Tool (PERMIT) site, Terracon requested an Environmental Review for Natural Resources for the site.

Preparation of this letter report.

2.0 THREATENED AND ENDANGERED SPECIES HABITAT REVIEW

2.1 UFSWS Official Species List

Terracon requested an official species lists (the List) from the IPAC system. A copy of the List is included in Appendix B. The List identified a total of 6 of threatened, endangered, candidate species, or species of concern for the project site(s). Table 2 includes the species identified on the List and their suitable habitat.

Lone Tree ■ Johnson County, Iowa

June 17, 2022 Terracon Project No. 06227049



Table 2. IPAC Listed Species

Group	Name	Status	Habitat ¹
Mammals	Northern Long-Eared Bat (Myotis septentrionalis)	Threatened	Hibernates in caves and mines – swarming in surrounding wooded areas in autumn, Roots and forages in upland forests during late spring and summer.
Mammals	Indiana Bat (<i>Myotis sodalist</i>)	Endangered	Hibernates in caves and mines – swarming in surrounding wooded areas in autumn, Roots and forages in upland forests during late spring and summer.
Clams	Higgins Eye (pearlymussel) Lampsilis higginsii	Endangered	Larger rivers where it is usually found in areas with deep water and moderate currents.
Insects	Monarch Butterfly (Danaus plexippus)	Candidate	Open fields and meadows with milkweed
Flowering Plants	Eastern Prairie Fringed Orchid (<i>Platanthera leucophaea</i>)	Threatened	Wet prairies and sedge meadows
Flowering Plants	Western Prairie Fringed Orchid (<i>Platanthera</i> praeclara)	Threatened	Wet prairies and sedge meadows

Critical habitat are specific geographic areas that contain features essential for the conservation of a T&E Species. The list did not identify critical habitats within the project area that would be under the USFWS office's jurisdiction that need to be protected.

2.2 State Listed Species Review

Based on review of the Iowa Natural Areas Inventory (INAI) interactive webpage,² there are 88 listed unique species in Johnson County, Iowa. Table 3 summarizes the state listed species:

¹ As indicated in the IPAC return

²Posted at:

https://programs.iowadnr.gov/naturalareasinventory/pages/RepDistinctSpeciesByCounty.aspx?CountyID=52



Table 3. State Listed Species

Group	No. of Threatened State Status Species	No. of Endangered State Status Species	No. Special Concern State Status Species	No. of Threatened Federal Status Species	No. of Endangered Federal Status Species
Amphibians	1	0	0	0	0
Birds	0	3	1	0	0
Fish	1	1	0	0	0
Freshwater Mussels	3	5	0	0	3
Insects	1	0	3	0	0
Mammals	1	1	0	0	0
Plants (Dicots)	4	2	23	0	0
Plants (Monocots)	4	2	16	1	0
Plants (Pteriodophytes)	1	1	4	0	0
Reptiles	3	1	2	0	0
Totals:	19	16	49	1	3

Please note that some species are classified under both state and federal status' or only listed by one agency and classifications may differ between federal and state classifications. A copy of the information obtained from the INAI is presented in Appendix B

Utilizing the Iowa DNR Permit and Environmental Review Management Tool (PERMIT) site, Terracon requested an Environmental Review for Natural Resources for the project. The IDNR searched records for state and federal listed endangered or threatened species, rare natural communities, sensitive habitat and state lands and water in the proposed project area. The tracking number provided for the inquiry is 20220809. A copy of the IDNR response is presented in Appendix B and is discussed in Section 5.

2.3 Soil Survey Information

Terracon utilized the U.S. Department of Agriculture Soil Conservation Service, now known as the Natural Resource Conservation Service (NRCS) on-line Web Soil survey (WSS) to identify soil types and hydric soils. The following soil types were identified at subject site(s), based on an area of inquiry search utilizing the WSS:



Table 4. Soil Types

Map Unit Symbol	Map Unit Name	National Hydric Soil List	County Hydric Soil List
119	Muscatine Silt loam	Yes	Yes
121B	Tama Silt loam	No	No
175B	Dickinson Fine Sandy loam	No	No
122	Sperry Silt loam, depressional	Yes	Yes
160	Walford Silt loam	Yes	Yes
291	Atterberry Silt loam	Yes	Yes
M162B	Downs Silt Loam, Till Plain	No	No
M162C	M162C Downs Silt Loam, Till Plain		No
M162C2	Downs Silt Loam, Till Plain	No	No

- The Muscatine Silt loam soils are generally found on interfluves and summits. Soils generally consist of somewhat poorly drained soils and has a hydric soil rating.
- The Tama Silt loam soils are generally found on interfulves. Soils generally consist of well drained soils and has a non-hydric soil rating.
- The Dickinson Fine Sandy loam soils are generally found on stream terraces and dunes. Soils generally consist of well drained soils and has a non-hydric soil rating.
- The Sperry Silt loam, depressional soils are generally found on interfluves and summits. Soils generally consist of very poorly drained soils and has a hydric soil rating.
- The Walford Silt loam soils are generally found interfluves and summits. Soils generally consist of poorly drained soils and has a hydric soil rating.
- The Atterberry Silt loam soils are generally found on interfluves and summits. Soils generally consist of somewhat poorly drained soils and has a hydric soil rating.
- The Downs Silt loam, Till Plain soils are generally found on interfluves and summit shoulders. Soils generally consist of well drained soils and has a non-hydric soil rating.

2.4 Aerial Photographs

Terracon reviewed aerial photographs obtained from ERIS to identify suspected wetland and sensitive areas on the subject site. Aerial photographs from 1937, 1951, 1963, 1970, 1983, 1994, 2005-2010, 2014, 2015, 2017, 2019 were reviewed and have been included in Appendix B. A summary of the aerial photography is provided in the following table.



Historical Aerial Photographs – Lone Tree

Year	Description		
1937-2019	The site is an agricultural field with apparent aquatic features running through the northwestern corner and the southwestern corner.		

3.0 PRELIMINARY HABITAT INVESTIGATION FIELD SERVICES

3.1 Field Services

On April 27, 2022 the preliminary habitat survey was performed by Mr. Jordan Smith, Staff Scientist, who holds a BA in Environmental Science and is an experienced wetland delineator for the Terracon Cedar Rapids, Iowa office.

3.2 Methods

These services are intended to provide preliminary information that will assist the client in evaluating and complying with federal and state endangered species requirements regulated by the USFWS and IDNR, respectively. To meet this objective, Terracon investigated and assessed the potential for listed species to be impacted by eventual development of the site as generally follows:

- An assessment of the potential effect on listed species was made in consideration of the presence of suitable habitat, the likelihood for listed species to make use of suitable habitat, the likelihood for listed species to be present on the site as evidenced by indicators that are visible at the time of the site reconnaissance, and/or the likelihood for potential project effects on listed species. Suitable avoidance and minimization measures to minimize adverse effects may be taken into account, as appropriate and in coordination with the client, but only on a preliminary, conceptual basis.
- The habitat survey for the Northern Long Eared Bat was performed in general accordance with guidance published by the USFWS. The guidelines define suitable summer habitat as a wide variety of forested/wooded habitats where roosting and foraging may take place. Non-forested habitat such as wetland areas, wood lines, fence lines, and edges of agricultural fields may also qualify as travel corridors. Preferred tree species characteristics include exfoliating bark, crevices, cracks, etc. with a diameter breast height (dbh) of three inches or greater. Wooded areas may be somewhat dense; however, open corridors that provide access to feeding in riparian and floodplain areas are necessary for travel purposes.

Lone Tree Johnson County, Iowa
June 17, 2022 Terracon Project No. 06227049



4.0 FINDINGS AND RECOMMENDATIONS

4.1 Findings

The site is currently agricultural in use and is located within the drainage corridor of Otter Creek. Properties to the north and east are of mixed (residential and agricultural) use, properties to the south and west are agricultural in use.

Select photos of the subject site and site conditions are included in Appendix D. The following is a general summary of the site conditions relative to the reference documents for federally listed T&E species:

- Terracon performed a limited tree habitat assessment within the project alignment. Terracon evaluated the tree suitability generally based on FWS guidelines. Upon assessment, Terracon did not observe trees that presented suitable habitat for Northern Long-Eared Bats.
- The site consists of agricultural land and an apparent drainage feature that flows through the southeastern corner of the site. The site consists of, but is not limited to, herbaceous vegetation including reed canary grass, hairy crabgrass, stinging nettle, annual wormwood, and nodding wildrye; woody vegetation including rock grape; and trees including blackthorn, and sandbar willow.
- Based on the FWS habitat description and our observations, suitable habitat for the Higgins Eye Mussel was not observed in the project site.
- Based on the FWS habitat description and our observations, suitable habitat for the Eastern and Western Prairie Fringed Orchid was not observed in the project site.
- Based on the FWS habitat description and our observations, suitable habitat for the Monarch Butterfly was not observed in the project site.

On April 19, 2022, Terracon utilized the IPaC system and input the project information based on our knowledge of the project to date. An automated letter dated April 19, 2022 from USFWS for the project was downloaded from the IPaC site. A copy of the USFWS verification letter is appended to this document and indicates the following:

"Based upon your IPaC submission, any take of the northern long-eared bat that may occur as a result of the Action is not prohibited under the ESA Section 4(d) rule adopted for this species at 50 CFR §17.40(o). Unless the Service advises you within 30 days of the date of this letter that your IPaC-assisted determination was incorrect, this letter verifies that the Action is not likely to result in unauthorized take of the northern long-eared bat. If your Action proceeds as described and no additional information about the Action's effects on species protected under the ESA becomes available, no further coordination with the Service is required with respect to the northern long-eared bat."

Lone Tree Johnson County, Iowa

June 17, 2022 Terracon Project No. 06227049



"Although no longer protected under the Endangered Species Act, be aware that bald eagles are protected under the Bald and Golden Eagle Protection Act (16 U.S.C. 668 et seq.) and Migratory Bird Treaty Act (16 U.S.C. 703 et seq), as are golden eagles. Projects affecting these species may require measures to avoid harming eagles or may require a permit. If your project is near an eagle nest or winter roost area, see our Eagle Permits website at http://www.fws.gov/midwest/midwestbird/EaglePermits/index.html to help you determine if you can avoid impacting eagles or if a permit may be necessary."

The following species may occur in your project area and are not covered by this determination:

- Eastern Prairie Fringed Orchid *Platanthera leucophaea (Threatened)*
- Higgins Eye (pearlymussel) Lampsilis higginsii (Endangered)
- Indiana Bat Myotis sodalis (Endangered)
- Monarch Butterfly Danaus plexippus (Candidate)
- Western Prairie Fringed Orchid Platanthera praeclara (Threatened)

On April 21, 2022, Mr. Seth Moore, IDNR Environmental Specialist responded to the records request for the Lone Tree site, indicating the IDNR searched for records of rare species and significant natural communities in the project area and found no site-specific records that would be impacted by this project.

In response to the records request for the Lone Tree site, the IDNR responded with the following as seen in Appendix C:

"These records and data are not the result of thorough field surveys. If listed species or rare communities are found during the planning or construction phases, additional studies and/or mitigation may be required. This letter is a record of review for protected species, rare natural communities, state lands and waters in the project area, including review by personnel representing state parks, preserves, recreation areas, fisheries and wildlife but does not include comment from the Environmental Services Division of this Department. This letter does not constitute a permit. Other permits may be required from the Department or other state or federal agencies before work begins on this project."

Copies of the Agency Correspondence are provided in Appendix C.

4.2 Recommendations

Terracon did not observe suitable habitat for the Northern Long-Eared Bat or other federally listed species at the site, therefore no actions are recommended at this time.

Lone Tree Johnson County, Iowa
June 17, 2022 Terracon Project No. 06227049



5.0 GENERAL COMMENTS

The findings of this Preliminary T&E Habitat Evaluation are based on the project location, project type, and property boundaries provided by the client. The findings and opinions presented are relative to the dates of our site work and should not be relied on to represent conditions at a later date. The opinions included herein are based on information obtained during this Preliminary T&E Habitat Evaluation and our experience. Due to the preliminary attributes of this project, additional regulatory consultation and investigations may be warranted before the project can commence. Additionally, the client should understand that the responses to the IPAC qualification interview based on our understanding of the project, readily available information, and our knowledge of similar projects and may not reflect any and all project activities. Additional agency coordination is likely.

This report has been prepared in accordance with generally accepted scientific and engineering evaluation practices. This report is for the exclusive use of the client for the project being discussed. No warranties, either express or implied, are intended or made.

APPENDIX A AGENCY CORRESPONDANCE and SPECIES LISTS



United States Department of the Interior



FISH AND WILDLIFE SERVICE

Illinois-Iowa Ecological Services Field Office Illinois & Iowa Ecological Services Field Office 1511 47th Ave Moline, IL 61265-7022

Phone: (309) 757-5800 Fax: (309) 757-5807

In Reply Refer To: April 19, 2022

Project Code: 2022-0033218 Project Name: Lone Tree Site

Subject: List of threatened and endangered species that may occur in your proposed project

location or may be affected by your proposed project

To Whom It May Concern:

The enclosed species list identifies threatened, endangered, proposed and candidate species, as well as proposed and final designated critical habitat, that may occur within the boundary of your proposed project and/or may be affected by your proposed project. The species list fulfills the requirements of the U.S. Fish and Wildlife Service (Service) under section 7(c) of the Endangered Species Act (Act) of 1973, as amended (16 U.S.C. 1531 *et seq.*).

New information based on updated surveys, changes in the abundance and distribution of species, changed habitat conditions, or other factors could change this list. Please feel free to contact us if you need more current information or assistance regarding the potential impacts to federally proposed, listed, and candidate species and federally designated and proposed critical habitat. Please note that under 50 CFR 402.12(e) of the regulations implementing section 7 of the Act, the accuracy of this species list should be verified after 90 days. This verification can be completed formally or informally as desired. The Service recommends that verification be completed by visiting the ECOS-IPaC website at regular intervals during project planning and implementation for updates to species lists and information. An updated list may be requested through the ECOS-IPaC system by completing the same process used to receive the enclosed list.

The purpose of the Act is to provide a means whereby threatened and endangered species and the ecosystems upon which they depend may be conserved. Under sections 7(a)(1) and 7(a)(2) of the Act and its implementing regulations (50 CFR 402 *et seq.*), Federal agencies are required to utilize their authorities to carry out programs for the conservation of threatened and endangered species and to determine whether projects may affect threatened and endangered species and/or designated critical habitat.

A Biological Assessment is required for construction projects (or other undertakings having similar physical impacts) that are major Federal actions significantly affecting the quality of the human environment as defined in the National Environmental Policy Act (42 U.S.C. 4332(2)

(c)). For projects other than major construction activities, the Service suggests that a biological evaluation similar to a Biological Assessment be prepared to determine whether the project may affect listed or proposed species and/or designated or proposed critical habitat. Recommended contents of a Biological Assessment are described at 50 CFR 402.12.

If a Federal agency determines, based on the Biological Assessment or biological evaluation, that listed species and/or designated critical habitat may be affected by the proposed project, the agency is required to consult with the Service pursuant to 50 CFR 402. In addition, the Service recommends that candidate species, proposed species and proposed critical habitat be addressed within the consultation. More information on the regulations and procedures for section 7 consultation, including the role of permit or license applicants, can be found in the "Endangered Species Consultation Handbook" at:

http://www.fws.gov/endangered/esa-library/pdf/TOC-GLOS.PDF

Migratory Birds: In addition to responsibilities to protect threatened and endangered species under the Endangered Species Act (ESA), there are additional responsibilities under the Migratory Bird Treaty Act (MBTA) and the Bald and Golden Eagle Protection Act (BGEPA) to protect native birds from project-related impacts. Any activity, intentional or unintentional, resulting in take of migratory birds, including eagles, is prohibited unless otherwise permitted by the U.S. Fish and Wildlife Service (50 C.F.R. Sec. 10.12 and 16 U.S.C. Sec. 668(a)). For more information regarding these Acts see https://www.fws.gov/birds/policies-and-regulations.php.

The MBTA has no provision for allowing take of migratory birds that may be unintentionally killed or injured by otherwise lawful activities. It is the responsibility of the project proponent to comply with these Acts by identifying potential impacts to migratory birds and eagles within applicable NEPA documents (when there is a federal nexus) or a Bird/Eagle Conservation Plan (when there is no federal nexus). Proponents should implement conservation measures to avoid or minimize the production of project-related stressors or minimize the exposure of birds and their resources to the project-related stressors. For more information on avian stressors and recommended conservation measures see https://www.fws.gov/birds/bird-enthusiasts/threats-to-birds.php.

In addition to MBTA and BGEPA, Executive Order 13186: *Responsibilities of Federal Agencies to Protect Migratory Birds*, obligates all Federal agencies that engage in or authorize activities that might affect migratory birds, to minimize those effects and encourage conservation measures that will improve bird populations. Executive Order 13186 provides for the protection of both migratory birds and migratory bird habitat. For information regarding the implementation of Executive Order 13186, please visit https://www.fws.gov/birds/policies-and-regulations/executive-orders/e0-13186.php.

We appreciate your concern for threatened and endangered species. The Service encourages Federal agencies to include conservation of threatened and endangered species into their project planning to further the purposes of the Act. Please include the Consultation Code in the header of this letter with any request for consultation or correspondence about your project that you submit to our office.

Attachment(s):

- Official Species List
- USFWS National Wildlife Refuges and Fish Hatcheries
- Wetlands

Official Species List

This list is provided pursuant to Section 7 of the Endangered Species Act, and fulfills the requirement for Federal agencies to "request of the Secretary of the Interior information whether any species which is listed or proposed to be listed may be present in the area of a proposed action".

This species list is provided by:

Illinois-Iowa Ecological Services Field Office Illinois & Iowa Ecological Services Field Office 1511 47th Ave Moline, IL 61265-7022 (309) 757-5800

Project Summary

Project Code: 2022-0033218

Event Code: None

Project Name: Lone Tree Site

Project Type: Acquisition of Lands

Project Description: Lone Tree Site, 1801476001, 50 acres

Project Location:



Counties: Johnson County, Iowa

04/19/2022 3

Endangered Species Act Species

There is a total of 6 threatened, endangered, or candidate species on this species list.

Species on this list should be considered in an effects analysis for your project and could include species that exist in another geographic area. For example, certain fish may appear on the species list because a project could affect downstream species.

IPaC does not display listed species or critical habitats under the sole jurisdiction of NOAA Fisheries¹, as USFWS does not have the authority to speak on behalf of NOAA and the Department of Commerce.

See the "Critical habitats" section below for those critical habitats that lie wholly or partially within your project area under this office's jurisdiction. Please contact the designated FWS office if you have questions.

1. NOAA Fisheries, also known as the National Marine Fisheries Service (NMFS), is an office of the National Oceanic and Atmospheric Administration within the Department of Commerce.

Mammala

NAME	STATUS
Indiana Bat <i>Myotis sodalis</i>	Endangered
There is final critical habitat for this species. The location of the critical habitat is not available.	
Species profile: https://ecos.fws.gov/ecp/species/5949	
Northern Long-eared Bat <i>Myotis septentrionalis</i>	Threatened
No critical habitat has been designated for this species.	
Species profile: https://ecos.fws.gov/ecp/species/9045	
Clams	
	

NAME	STATUS
Higgins Eye (pearlymussel) <i>Lampsilis higginsii</i>	Endangered
No critical habitat has been designated for this species.	
Species profile: https://ecos.fws.gov/ecp/species/5428	

Insects

NAME	STATUS
Monarch Butterfly <i>Danaus plexippus</i>	Candidate

Monarch Butterfly *Danaus plexippus*

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/9743

Flowering Plants

NAME STATUS

Eastern Prairie Fringed Orchid Platanthera leucophaea

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/601

Western Prairie Fringed Orchid Platanthera praeclara

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/1669

Threatened

Threatened

Critical habitats

THERE ARE NO CRITICAL HABITATS WITHIN YOUR PROJECT AREA UNDER THIS OFFICE'S JURISDICTION.

USFWS National Wildlife Refuge Lands And Fish Hatcheries

Any activity proposed on lands managed by the <u>National Wildlife Refuge</u> system must undergo a 'Compatibility Determination' conducted by the Refuge. Please contact the individual Refuges to discuss any questions or concerns.

THERE ARE NO REFUGE LANDS OR FISH HATCHERIES WITHIN YOUR PROJECT AREA.

04/19/2022

Wetlands

Impacts to <u>NWI wetlands</u> and other aquatic habitats may be subject to regulation under Section 404 of the Clean Water Act, or other State/Federal statutes.

For more information please contact the Regulatory Program of the local <u>U.S. Army Corps of Engineers District</u>.

Please note that the NWI data being shown may be out of date. We are currently working to update our NWI data set. We recommend you verify these results with a site visit to determine the actual extent of wetlands on site.

WETLAND INFORMATION WAS NOT AVAILABLE WHEN THIS SPECIES LIST WAS GENERATED. PLEASE VISIT https://www.fws.gov/wetlands/data/mapper.html OR CONTACT THE FIELD OFFICE FOR FURTHER INFORMATION.

IPaC User Contact Information

Agency: Terracon

Name: Ian Bootsmiller Address: 2640 12th Street City: Cedar Rapids

State: IA Zip: 52404

Email ian.bootsmiller@terracon.com

Phone: 3195418757



United States Department of the Interior



FISH AND WILDLIFE SERVICE

Illinois-Iowa Ecological Services Field Office Illinois & Iowa Ecological Services Field Office 1511 47th Ave Moline, IL 61265-7022 Phone: (309) 757-5800 Fax: (309) 757-5807

In Reply Refer To: May 18, 2022

Project code: 2022-0033218 Project Name: Lone Tree Site

Subject: Consistency letter for the 'Lone Tree Site' project indicating that any take of the

northern long-eared bat that may occur as a result of the Action is not prohibited under the ESA Section 4(d) rule adopted for this species at 50 CFR §17.40(o).

Dear Ian Bootsmiller:

The U.S. Fish and Wildlife Service (Service) received on May 18, 2022 your effects determination for the 'Lone Tree Site' (the Action) using the northern long-eared bat (*Myotis septentrionalis*) key within the Information for Planning and Consultation (IPaC) system. You indicated that no Federal agencies are involved in funding or authorizing this Action. This IPaC key assists users in determining whether a non-Federal action may cause "take" of the northern long-eared bat that is prohibited under the Endangered Species Act of 1973 (ESA) (87 Stat.884, as amended; 16 U.S.C. 1531 et seq.).

Based upon your IPaC submission, any take of the northern long-eared bat that may occur as a result of the Action is not prohibited under the ESA Section 4(d) rule adopted for this species at 50 CFR §17.40(o). Unless the Service advises you within 30 days of the date of this letter that your IPaC-assisted determination was incorrect, this letter verifies that the Action is not likely to result in unauthorized take of the northern long-eared bat.

Please report to our office any changes to the information about the Action that you entered into IPaC, the results of any bat surveys conducted in the Action area, and any dead, injured, or sick northern long-eared bats that are found during Action implementation.

If your Action proceeds as described and no additional information about the Action's effects on species protected under the ESA becomes available, no further coordination with the Service is required with respect to the northern long-eared bat.

The IPaC-assisted determination for the northern long-eared bat **does not** apply to the following ESA-protected species that also may occur in your Action area:

• Eastern Prairie Fringed Orchid *Platanthera leucophaea* Threatened

- Higgins Eye (pearlymussel) *Lampsilis higginsii* Endangered
- Indiana Bat *Myotis sodalis* Endangered
- Monarch Butterfly *Danaus plexippus* Candidate
- Western Prairie Fringed Orchid *Platanthera praeclara* Threatened

You may coordinate with our Office to determine whether the Action may cause prohibited take of the animal species listed above.

[1] Take means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct [ESA Section 3(19)].

Action Description

You provided to IPaC the following name and description for the subject Action.

1. Name

Lone Tree Site

2. Description

The following description was provided for the project 'Lone Tree Site':

Lone Tree Site, 1801476001, 50 acres

Approximate location of the project can be viewed in Google Maps: https://www.google.com/maps/@41.49898349999994,-91.4858634315035,14z



Determination Key Result

This non-Federal Action may affect the northern long-eared bat; however, any take of this species that may occur incidental to this Action is not prohibited under the final 4(d) rule at 50 CFR §17.40(o).

Determination Key Description: Northern Long-eared Bat 4(d) Rule

This key was last updated in IPaC on **May 15, 2017**. Keys are subject to periodic revision.

This key is intended for actions that may affect the threatened northern long-eared bat.

The purpose of the key for non-Federal actions is to assist determinations as to whether proposed actions are excepted from take prohibitions under the northern long-eared bat 4(d) rule.

If a non-Federal action may cause prohibited take of northern long-eared bats or other ESA-listed animal species, we recommend that you coordinate with the Service.

Determination Key Result

Based upon your IPaC submission, any take of the northern long-eared bat that may occur as a result of the Action is not prohibited under the ESA Section 4(d) rule adopted for this species at 50 CFR §17.40(o).

Qualification Interview

1. Is the action authorized, funded, or being carried out by a Federal agency? *No*

2. Will your activity purposefully **Take** northern long-eared bats?

No

3. [Semantic] Is the project action area located wholly outside the White-nose Syndrome Zone?

Automatically answered

No

4. Have you contacted the appropriate agency to determine if your project is near a known hibernaculum or maternity roost tree?

Location information for northern long-eared bat hibernacula is generally kept in state Natural Heritage Inventory databases — the availability of this data varies state-by-state. Many states provide online access to their data, either directly by providing maps or by providing the opportunity to make a data request. In some cases, to protect those resources, access to the information may be limited. A web page with links to state Natural Heritage Inventory databases and other sources of information on the locations of northern long-eared bat roost trees and hibernacula is available at www.fws.gov/media/nleb-roost-tree-and-hibernacula-state-specific-data-links-0.

Yes

5. Will the action affect a cave or mine where northern long-eared bats are known to hibernate (i.e., hibernaculum) or could it alter the entrance or the environment (physical or other alteration) of a hibernaculum?

No

6. Will the action involve Tree Removal?

No

Project Questionnaire

If the project includes forest conversion, report the appropriate acreages below. Otherwise, type '0' in questions 1-3.

1. Estimated total acres of forest conversion:

0

2. If known, estimated acres of forest conversion from April 1 to October 31

0

3. If known, estimated acres of forest conversion from June 1 to July 31

0

If the project includes timber harvest, report the appropriate acreages below. Otherwise, type '0' in questions 4-6.

4. Estimated total acres of timber harvest

0

5. If known, estimated acres of timber harvest from April 1 to October 31

0

6. If known, estimated acres of timber harvest from June 1 to July 31

0

If the project includes prescribed fire, report the appropriate acreages below. Otherwise, type '0' in questions 7-9.

7. Estimated total acres of prescribed fire

0

8. If known, estimated acres of prescribed fire from April 1 to October 31

n

9. If known, estimated acres of prescribed fire from June 1 to July $31\,$

0

If the project includes new wind turbines, report the megawatts of wind capacity below. Otherwise, type '0' in question 10.

10. What is the estimated wind capacity (in megawatts) of the new turbine(s)?

0

IPaC User Contact Information

Agency: Terracon

Name: Ian Bootsmiller Address: 2640 12th Street City: Cedar Rapids

State: IA Zip: 52404

Email ian.bootsmiller@terracon.com

Phone: 3195418757

Smith, Jordan M

From: seth.moore@dnr.iowa.gov

Sent: Thursday, April 21, 2022 3:42 PM

To: Bootsmiller, lan

Subject: 2022-0809 Environmental Review Request - Lone Tree

41.4990/-91.4859; Johnson County

Sec. 6/T77N/R05W

Thank you for inviting Department comment on the impact of this project. The Department has searched for records of rare species and significant natural communities in the project area and found no site-specific records that would be impacted by this project. However, these records and data are not the result of thorough field surveys. If listed species or rare communities are found during the planning or construction phases, additional studies and/or mitigation may be required.

This letter is a record of review for protected species, rare natural communities, state lands and waters in the project area, including review by personnel representing state parks, preserves, recreation areas, fisheries and wildlife but does not include comment from the Environmental Services Division of this Department. This letter does not constitute a permit. Other permits may be required from the Department or other state or federal agencies before work begins on this project.

If you have questions about this letter or require further information, please contact me at (515) 330-6432.


Environmental Review requests can be submitted electronically to: SLER@dnr.iowa.gov.

Sincerely,



Seth Moore | Environmental Specialist lowa Department of Natural Resources P 515-330-6432 | F 515-725-8202 | 502 E. 9th St., Des Moines, IA 50319 www.iowadnr.gov

APPENDIX B AERIAL PHOTOGRAPHS

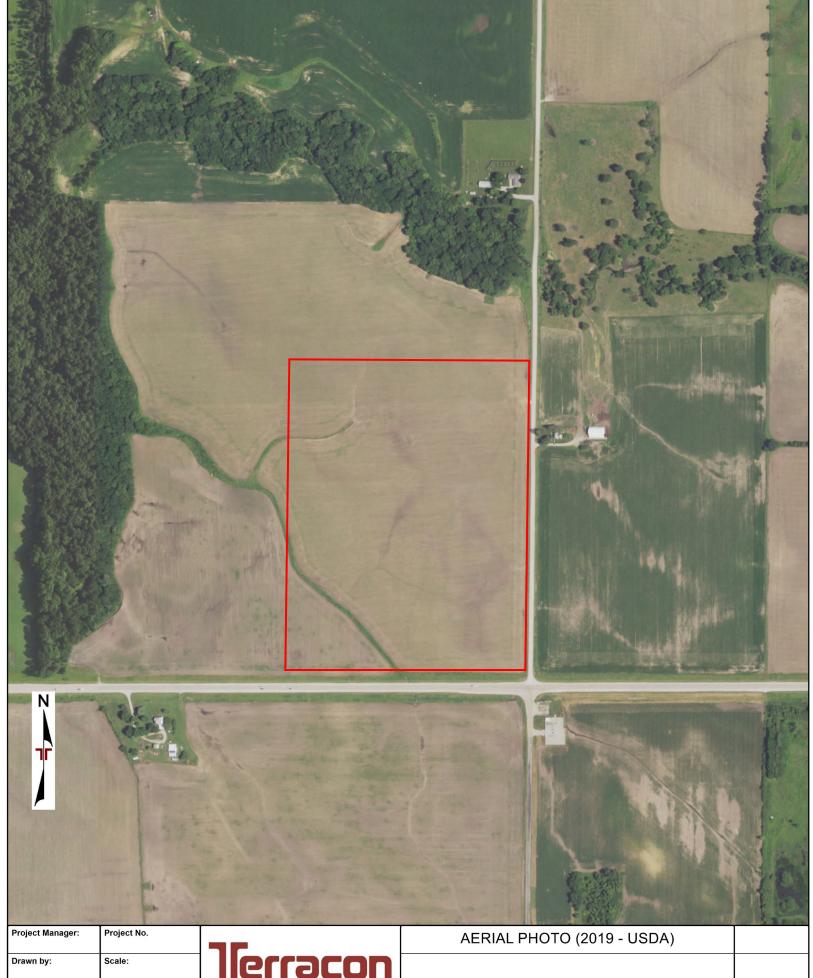

File Name: Checked by: Date: Approved by:

Tlerracon

APPENDIX C PHOTOGRAPHIC DOCUMENTATION





Photo 1: View of the site looking northeast at the east adjoining residential property.

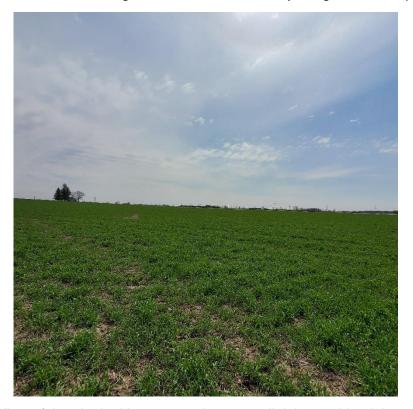


Photo 2: View of the site looking east at the east adjoining residential property.





Photo 3: View of site looking south.



Photo 4: View of south adjoining agricultural field.





Photo 5: View of the site looking west at the west adjoining wooded area.



Photo 6: View of creek running through the site.





Photo 7: View of north adjoining agricultural land and wooded area.



Photo 8: View of creek running through the site, near the Highway 22.

U.S. Army Corps of Engineers WETLAND DETERMINATION DATA SHEET – Midwest Region

See ERDC/EL TR-10-16; the proponent agency is CECW-CO-R

OMB Control #: 0710-0024, Exp:11/30/2024 Requirement Control Symbol EXEMPT: (Authority: AR 335-15, paragraph 5-2a)

Project/Site: Conifer Power - Lone Tree	City/County: Lone Tre	ee/Johnson	Sampling Date	: 4/27/	22
Applicant/Owner: Conifer Power		State: IA	Sampling Point	: <u>D</u>)P-1
Investigator(s): Jordan Smith	Section, Township, Rai	nge: S1 T77N R06W			
Landform (hillside, terrace, etc.): Drainage	Local relief (c	oncave, convex, none):	Concave		
Slope (%): 1 Lat: 41°29'48.57"	Long: 91°29'10.54"	_	Datum: IA State	Plane No	orth
Soil Map Unit Name: Sperry silt loam (122)		NWI classif	ication: PEM1B		
Are climatic / hydrologic conditions on the site typical for	or this time of year? Yes X	No (If no, exp	olain in Remarks.)		
Are Vegetation , Soil , or Hydrology	significantly disturbed? Are "Normal C	circumstances" present?			
Are Vegetation, Soil, or Hydrology		olain any answers in Rei	marks.)		_
SUMMARY OF FINDINGS – Attach site ma		·		atures	s, etc.
Hydrophytic Vegetation Present? Yes	within a Wetland?		No		
Remarks:					
Data point taken in field.					
VEGETATION – Use scientific names of pla	ints.				
Tree Stratum (Plot size: 15)	Absolute Dominant Indicator % Cover Species? Status	Dominance Test wor	drahaat.		
Tree Stratum (Plot size: 15) 1. Rhamnus cathartica	% Cover Species? Status 10 Yes FAC	Number of Dominant			
2.		Are OBL, FACW, or F		2	(A)
3.		Total Number of Domi	inant Species		_
4		Across All Strata:		2	_(B)
5		Percent of Dominant S	•	100.00/	(A /D)
Sapling/Shrub Stratum (Plot size:	10=Total Cover	Are OBL, FACW, or F	AC:1	100.0%	_(A/B)
1	'	Prevalence Index wo	orksheet:		-
2.		Total % Cover of		oly by:	
3.		OBL species 0		0	_
4.		FACW species 90) x 2 =	180	_
5		FAC species 10	x 3 =	30	_
	=Total Cover	FACU species 0	x 4 =	0	_
Herb Stratum (Plot size: 5	54.014	UPL species 0		0	- (D)
Phalaris arundinacea 2.	90 Yes FACW	Column Totals: 10	` _	210 10	- (B)
		Prevalence Index =	= B/A =	10	-
		Hydrophytic Vegetat	ion Indicators:		
		1 - Rapid Test for		etation	
6.		X 2 - Dominance Te			
7.		X 3 - Prevalence Inc	dex is ≤3.0 ¹		
8.		4 - Morphological			
9			s or on a separat		
10		Problematic Hydro	ophytic Vegetatio	n ¹ (Expla	ain)
Woody Vine Stratum (Plot size:	90 =Total Cover	¹ Indicators of hydric so be present, unless dis			must
1	[Hydrophytic			
2		Vegetation			
	=Total Cover	Present? Yes	X No		
Remarks: (Include photo numbers here or on a sepal Hydrophytic vegetation is present. Presented as Pho	· · · · · · · · · · · · · · · · · · ·				

SOIL Sampling Point: DP-1

Depth (inches)	Matrix Color (moist)	%	Color (moist)	x Featur <u>%</u>	Type ¹	Loc ²	Texture	F	Remarks	
0-16	10YR 2/1	85	5YR 4/6	15	С	M	Loamy/Clayey	Prominent re	edox concentra	ations
16-32	10YR 2/1	100					Sandy			
-								· .		
			_							
Type: C=C	oncentration, D=Dep	oletion, RM:	=Reduced Matrix, N	 √S=Mas	ked Sand	Grains.	² Locatio	n: PL=Pore Lining	g, M=Matrix.	
Hydric Soil			•					ors for Problema		ls³:
Histosol	(A1)		Sandy Gle	yed Mat	rix (S4)		Coa	st Prairie Redox ((A16)	
Histic Ep	oipedon (A2)		Sandy Re	dox (S5)			Iron	-Manganese Mas	ses (F12)	
Black His	stic (A3)		Stripped N	1atrix (Se	6)		Red	l Parent Material (F21)	
Hydroge	n Sulfide (A4)		Dark Surfa	ace (S7)			Ver	y Shallow Dark Su	ırface (F22)	
Stratified	l Layers (A5)		Loamy Mu	icky Mine	eral (F1)		Oth	er (Explain in Rem	narks)	
2 cm Mu	ick (A10)		Loamy Gle	eyed Mat	trix (F2)					
Depleted	d Below Dark Surface	e (A11)	Depleted I	Matrix (F	3)					
Thick Da	ark Surface (A12)		X Redox Da				³ Indicato	ors of hydrophytic	vegetation and	d
	lucky Mineral (S1)		Depleted I					and hydrology mu		
5 cm Mu	icky Peat or Peat (S	3)	Redox De	pression	s (F8)	-	unle	ess disturbed or pr	roblematic.	
	Layer (if observed):	:								
Type:										
Depth (ir	nches):						Hydric Soil Preser	nt? \	Yes <u>X</u> N	№
Domorko										
Remarks:						ļ				
Hydric soil p	resent.									
	resent.					Į.				
	resent.									
Hydric soil p						•				
Hydric soil pi	OGY									
Hydric soil pi HYDROLO Wetland Hy	OGY drology Indicators:									
Hydric soil portion of the Hydrology wetland Hydrology Primary India	OGY drology Indicators: cators (minimum of o		•					ary Indicators (mir		equire
Hydric soil portion of the Hydrold Hydrold Hydrold Hydrold Surface Surface	drology Indicators: cators (minimum of o		Water-Sta	ined Lea	` '		Sur	face Soil Cracks (B6)	equire
Hydric soil portion of the	drology Indicators: cators (minimum of o Water (A1) tter Table (A2)		Water-Sta Aquatic Fa	ined Lea auna (B1	3)		Suri X Dra	face Soil Cracks (linage Patterns (B	B6) 10)	equire
HYDROLO Wetland Hyd Primary India Surface X High Wa X Saturation	drology Indicators: cators (minimum of o Water (A1) tter Table (A2) on (A3)		Water-Sta Aquatic Fa True Aqua	ined Lea auna (B1 atic Plant	3) s (B14)		Sur X Dra Dry	face Soil Cracks (linage Patterns (B -Season Water Ta	B6) 10) able (C2)	equire
HYDROLO Wetland Hyd Primary India Surface X High Wa X Saturatic Water M	drology Indicators: cators (minimum of of Water (A1) hter Table (A2) on (A3) larks (B1)		Water-Sta Aquatic Fa True Aqua Hydrogen	ined Lea auna (B1 atic Plant Sulfide (3) s (B14) Odor (C1))	Sur X Dra Dry Cra	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8	B6) 10) able (C2)	
HYDROLO Wetland Hyd Primary India Surface X High Wa X Saturatio Water M Sedimen	drology Indicators: cators (minimum of of Water (A1) ater Table (A2) on (A3) arks (B1) at Deposits (B2)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F	ined Lea auna (B1 atic Plant Sulfide (Rhizosph	3) s (B14) Odor (C1) eres on I) ₋iving Ro	Sur X Dra Dry Cra oots (C3) X Sati	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on	B6) 10) able (C2)) Aerial Imagery	
HYDROLO Wetland Hydrimary India Surface X High Wa X Saturatic Water M Sedimen Drift Dep	drology Indicators: cators (minimum of of water (A1) ther Table (A2) on (A3) arks (B1) at Deposits (B2) posits (B3)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc	3) s (B14) Odor (C1) eres on l ced Iron () _iving Ro C4)	Sur X Dra Dry Cra Stur X Satr Stur	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F	B6) 10) able (C2)) Aerial Imagery Plants (D1)	
HYDROLO Wetland Hyde Primary India Surface X High Wa X Saturatio Water M Sedimen Drift Dep Algal Ma	drology Indicators: cators (minimum of of Water (A1) ter Table (A2) on (A3) larks (B1) at Deposits (B2) posits (B3) at or Crust (B4)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc	3) s (B14) Odor (C1) neres on I ced Iron () _iving Ro C4)	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on nted or Stressed F omorphic Position	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of Water (A1) tter Table (A2) on (A3) arks (B1) at Deposits (B2) posits (B3) at or Crust (B4)	one is requi	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc	3) s (B14) Odor (C1) eres on lead Iron (ction in Ties (C7)) _iving Ro C4)	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of other Table (A2) on (A3) darks (B1) at Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial I	one is requi	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or	ined Lea auna (B1 sulfide (Rhizosph of Reduce on Reduce Surface Well Dat	3) s (B14) Odor (C1) heres on I ced Iron (ction in Ti e (C7) ha (D9)) _iving Ro C4)	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on nted or Stressed F omorphic Position	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of water (A1) of (A3) arks (B1) of Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial I	one is requi	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or	ined Lea auna (B1 sulfide (Rhizosph of Reduce on Reduce Surface Well Dat	3) s (B14) Odor (C1) heres on I ced Iron (ction in Ti e (C7) ha (D9)) _iving Ro C4)	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on nted or Stressed F omorphic Position	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of Water (A1) tter Table (A2) on (A3) arks (B1) at Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial I	one is requi Imagery (B e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 sulfide (Rhizosph of Reduc on Reduc Surface Well Dat blain in R	3) s (B14) Ddor (C1) eres on I ced Iron (tition in Ti e (C7) a (D9) Remarks)) _iving Ro C4)	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on nted or Stressed F omorphic Position	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of other (A1) water (A1) uter Table (A2) on (A3) arks (B1) on Deposits (B2) oosits (B3) ut or Crust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present?	one is requi Imagery (B e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dat blain in R	3) s (B14) Ddor (C1) eres on I ced Iron (tition in Ti e (C7) a (D9) Remarks)) Living Rc (C4) Illed Soils	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B Season Water Ta yfish Burrows (C8 uration Visible on nted or Stressed F omorphic Position	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil property of the control	drology Indicators: cators (minimum of of other traple (A2) on (A3) arks (B1) at Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial I or Vegetated Concave vations: er Present? Ye Present?	Imagery (B e Surface (I es X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 stic Plant Sulfide (Rhizosph of Reduc in Reduc in Surface Well Dat Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (ction in Ti e (C7) a (D9) Remarks) nches): _ nches): _) Living Rc (C4) Illed Soils	Sur X Dra Dry. Cra Stur Stur Stur Stur Stur Stur Stur Stur	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2) 5)	(C9)
Hydric soil primary India Surface Surface Water M Sedimen Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Water Table Saturation P	drology Indicators: cators (minimum of of Water (A1) ater Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Ye resent?	one is requi Imagery (B e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 stic Plant Sulfide (Rhizosph of Reduc in Reduc in Surface Well Dat Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (tition in Ti e (C7) a (D9) Remarks)) Living Rc (C4) Illed Soils	Sur X Dra Dry Cra Stur S (C6) Geo	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2)	
Hydric soil primary Indices Wetland Hydric Surface Surface Surface Mater Mate	drology Indicators: cators (minimum of of Water (A1) ater Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Ye resent?	Imagery (B: e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No No	ined Lea auna (B1 sulfide (Rhizosph of Reduc in Reduc Surface Well Dat blain in R Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (ction in Ti e (C7) a (D9) Remarks) nches): nches):) Living Ro C4) Illed Soils	Sur X Dra Dry Cra Stur St	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2) 5)	(C9)
Hydric soil primary Indices Wetland Hydric Surface Surface Surface Mater Mate	drology Indicators: cators (minimum of of other (A1) atter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Ye resent? Ye oillary fringe)	Imagery (B: e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No No	ined Lea auna (B1 sulfide (Rhizosph of Reduc in Reduc Surface Well Dat blain in R Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (ction in Ti e (C7) a (D9) Remarks) nches): nches):) Living Ro C4) Illed Soils	Sur X Dra Dry Cra Stur St	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2) 5)	(C9)
Hydric soil primary Indices Wetland Hydric Surface Surface Surface Mater Mate	drology Indicators: cators (minimum of of other (A1) atter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Ye resent? Ye oillary fringe)	Imagery (B: e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No No	ined Lea auna (B1 sulfide (Rhizosph of Reduc in Reduc Surface Well Dat blain in R Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (ction in Ti e (C7) a (D9) Remarks) nches): nches):) Living Ro C4) Illed Soils	Sur X Dra Dry Cra Stur St	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2) 5)	(C9)
Hydric soil processing	drology Indicators: cators (minimum of of other (A1) atter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Ye resent? Ye oillary fringe)	Imagery (B: e Surface (I	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No No	ined Lea auna (B1 sulfide (Rhizosph of Reduc in Reduc Surface Well Dat blain in R Depth (i Depth (i	3) s (B14) Ddor (C1) eres on I ced Iron (ction in Ti e (C7) a (D9) Remarks) nches): nches):) Living Ro C4) Illed Soils	Sur X Dra Dry Cra Stur St	face Soil Cracks (I inage Patterns (B' -Season Water Ta yfish Burrows (C8 uration Visible on inted or Stressed F omorphic Position C-Neutral Test (D5	B6) 10) able (C2)) Aerial Imagery Plants (D1) (D2) 5)	(C9)

U.S. Army Corps of Engineers WETLAND DETERMINATION DATA SHEET – Midwest Region See ERDC/EL TR-10-16; the proponent agency is CECW-CO-R

OMB Control #: 0710-0024, Exp:11/30/2024 Requirement Control Symbol EXEMPT: (Authority: AR 335-15, paragraph 5-2a)

Project/Site: Conifer Power- Lone Tree	City/County: Lone T	ree/Johnson	Sampling Date:	4/27/22
Applicant/Owner: Conifer Power		State: IA	Sampling Point:	DP -2
Investigator(s): Jordan Smith	Section, Township, Ra	ange: S1 T77N R06W		
Landform (hillside, terrace, etc.): Field	Local relief ((concave, convex, none):	None	
Slope (%):1 Lat: 41°29"48.71"	Long: 91°29'10.33"		Datum: IA State Pl	ane North
Soil Map Unit Name: Sperry silt loam (122)		NWI classi	fication: None	
Are climatic / hydrologic conditions on the site typical for this time	of year? Yes X	No (If no, ex	olain in Remarks.)	
Are Vegetation, Soil, or Hydrologysignificantly	disturbed? Are "Normal	Circumstances" present?	Yes X No	o
Are Vegetation, Soil, or Hydrologynaturally pro	oblematic? (If needed, e	xplain any answers in Re	marks.)	
SUMMARY OF FINDINGS – Attach site map show	ing sampling point l	ocations, transects	, important fea	itures, etc.
Hydrophytic Vegetation Present? Yes No X	Is the Sampled A	Area		
Hydric Soil Present? Yes No X	within a Wetland		No X	
Wetland Hydrology Present? Yes X No No			-	
Remarks:	-			
Taken in field.				
VECETATION . Has acientific names of plants				
VEGETATION – Use scientific names of plants. Absolute	Dominant Indicator			
Tree Stratum (Plot size:) % Cover		Dominance Test wo	rksheet:	
1.		Number of Dominant	•	
2		Are OBL, FACW, or F		0 (A)
3		Total Number of Dom Across All Strata:	inant Species	1 (B)
5.		Percent of Dominant	Snecies That	(D)
	=Total Cover	Are OBL, FACW, or F	•	.0% (A/B)
Sapling/Shrub Stratum (Plot size:)				
1		Prevalence Index we		
2		Total % Cover of OBL species	$\frac{\text{Multiply}}{\text{X 1}}$	0 0
4.	 	· · · · · · · · · · · · · · · · · · ·	x 2 =	0
5.		· · · · · · · · · · · · · · · · · · ·) x 3 =	0
	=Total Cover	FACU species 7	0 x 4 = 2	280
Herb Stratum (Plot size: 5)		UPL species (0
1. Digitaria sanguinalis 70	Yes FACU	Column Totals: 7 Prevalence Index	`	280 (B)
2. 3.		Prevalence index	= B/A = 4.00	<u>) </u>
4.		Hydrophytic Vegetat	ion Indicators:	
5.			Hydrophytic Veget	ation
6		2 - Dominance Te		
7		3 - Prevalence In		tala a suma a artica
8			Adaptations ¹ (Prov	
10.			ophytic Vegetation	
70	=Total Cover	¹ Indicators of hydric s		
Woody Vine Stratum (Plot size:)	_	be present, unless dis		
1	<u> </u>	Hydrophytic		
		· •		
2	=Total Cover	Vegetation Present? Yes	No X	

SOIL Sampling Point: DP-1

Depth	Matrix		Read	x Featur							
(inches)	Color (moist)	%	Color (moist)	%	Type ¹	Loc ²	Textur	e	ſ	Remarks	
0-11	10YR 3/2	100					Loamy/Cl	ayey			
11-32	10YR 4/3	100					Loamy/Cl	ayey			
						·					
			D 1 184 ()						5		
	oncentration, D=Depl Indicators:	etion, Rivi	=Reduced Matrix, I	VIS=IVIAS	ked San	d Grains		Location: PL= ndicators for			_
Histosol			Sandy Gle	wod Mat	riv (S4)			Coast Prai		•	Solis .
	pipedon (A2)		Sandy Re				_	Iron-Manga			
Black His			Stripped N				_	Red Paren			
	n Sulfide (A4)		Dark Surfa		3)		-			urface (F22	')
	I Layers (A5)		Loamy Mu	` '	eral (F1)		-	Other (Exp			.)
2 cm Mu			Loamy Gl	-			_		an III NEI	nana)	
	Below Dark Surface	(A11)	Depleted	-							
	ark Surface (A12)	(****)	Redox Da	•	•		3	Indicators of h	vdrophytic	vegetation	and
	lucky Mineral (S1)		Depleted		` ')				ust be pres	
	cky Peat or Peat (S3	5)	Redox De		` '	,		•	•••	roblematic.	
	Layer (if observed):	,			. ,				· ·		
i vbe:											
Type: Depth (ir	nches):						Hydric Soil	Present?	•	Yes	No 2
Depth (ir	· ·		_				Hydric Soil	Present?	•	Yes	No
Depth (ir	· ·						Hydric Soil	Present?	,	Yes	No
Depth (in Remarks: Hydric soil n	ot present.						Hydric Soil	Present?	•	Yes	No
Depth (ir Remarks: Hydric soil no	ot present.						Hydric Soil	Present?		Yes	No
Depth (in Remarks: Hydric soil not be applied by Applied Property of the Prope	ot present.	ne is requ	iired; check all that	apply)				Present?			
Depth (in Depth	ot present. OGY drology Indicators:	ne is requ	ired; check all that Water-Sta		aves (B9)				cators (mir	nimum of to	
Depth (ir Remarks: Hydric soil no YDROLO Vetland Hydrimary India Surface	ot present. OGY drology Indicators: cators (minimum of o	ne is requ		ined Lea	` '			Secondary Indi	cators (min	nimum of tv	
Depth (in Remarks: Hydric soil not be soil	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2)	ne is requ	Water-Sta	ined Lea auna (B1	3)			Secondary Indi	cators (mil bil Cracks (Patterns (B	nimum of tv (B6)	
Depth (ir Remarks: Hydric soil not YDROLO Vetland Hydric Surface High Wa X Saturation	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2)	ne is requ	Water-Sta	ined Lea auna (B1 atic Plant	3) s (B14)			Secondary Indi Surface So Drainage F	cators (minobil Cracks (Patterns (B	nimum of to (B6) 10) able (C2)	
Depth (ir Remarks: Hydric soil no YDROLO Vetland Hydrimary India Surface High Wa X Saturatic Water M	or present. OGY drology Indicators: cators (minimum of or	ne is requ	Water-Sta Aquatic Fa True Aqua	nined Lea auna (B1 atic Plant Sulfide (3) s (B14) Odor (C1)		Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B	cators (minoli) Cracks (Patterns (Bun Water Taurrows (C8	nimum of to (B6) 10) able (C2)	wo require
Primary India Surface High Water M Sedimer	ot present. OGY drology Indicators: cators (minimum of o Water (A1) tter Table (A2) on (A3) arks (B1)	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen	ined Lea auna (B1 atic Plant Sulfide (Rhizosph	3) s (B14) Odor (C1 neres on l) Living Ro		Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation	cators (minoli) Cracks (Patterns (Bander Taurrows (C8	nimum of to (B6) 10) able (C2)	wo require
Pimary India Surface High Water M Sedimer Drift Dep Algal Ma	drology Indicators: cators (minimum of o Water (A1) tter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4)	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu	3) s (B14) Odor (C1 eres on lead Iron) Living Ro (C4)	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation	cators (minoli) Cracks (Patterns (Binoli) Water Taurrows (C8) Visible on Stressed F	nimum of to (B6) 10) able (C2) 3) Aerial Imac (Plants (D1)	wo require
Primary India Water M Sedimer Drift Dep Algal Ma Iron Dep	drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5)		Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc & Surface	3) S (B14) Odor (C1 Deres on lead Iron option in Ties (C7)) Living Ro (C4)	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or	cators (minorial Cracks (Patterns (Binorial Cracks) (C8) Water Taurrows (C8) Visible on Stressed Fic Position	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Primary India X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio	drology Indicators: cators (minimum of orwater (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) posits (B3) at or Crust (B4) osits (B5) on Visible on Aerial In	nagery (B	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck T) Gauge or	uined Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu on Reduc Surface Well Dat	3) cs (B14) Odor (C1 deres on lead from the condition in Ties (C7) ca (D9)) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph	cators (minorial Cracks (Patterns (Binorial Cracks) (C8) Water Taurrows (C8) Visible on Stressed Fic Position	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Primary India X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic	drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5)	nagery (B	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck T) Gauge or	uined Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu on Reduc Surface Well Dat	3) cs (B14) Odor (C1 deres on lead from the condition in Ties (C7) ca (D9)) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph	cators (minorial Cracks (Patterns (Binorial Cracks) (C8) Water Taurrows (C8) Visible on Stressed Fic Position	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Popth (ir Remarks: Hydric soil not soil	drology Indicators: cators (minimum of of of water (A1) ter Table (A2) on (A3) arks (B1) arks (B1) ot Deposits (B2) osits (B3) at or Crust (B4) osits (B5) on Visible on Aerial Introductions:	nagery (B	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck T) Gauge or	uined Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu on Reduc Surface Well Dat	3) cs (B14) Odor (C1 deres on lead from the condition in Ties (C7) ca (D9)) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph	cators (minorial Cracks (Patterns (Binorial Cracks) (C8) Water Taurrows (C8) Visible on Stressed Fic Position	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely Field Obser Gurface Water	ot present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) ot Deposits (B2) osits (B3) ot or Crust (B4) osits (B5) on Visible on Aerial In vegetated Concave vations: er Present?	nagery (B Surface (Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dat Depth (i	3) is (B14) Odor (C1 heres on liced Iron ction in Ti e (C7) ia (D9) Remarks)) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph	cators (minorial Cracks (Patterns (Binorial Cracks) (C8) Water Taurrows (C8) Visible on Stressed Fic Position	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Primary India X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely Field Obser Surface Water Table	drology Indicators: cators (minimum of orwater (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5) on Visible on Aerial Investment (B4) vegetated Concave vations: er Present? Ye Present?	nagery (B Surface (ss	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Ext	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dar Well Dar Depth (i Depth (i	3) is (B14) Odor (C1 heres on led Iron of the (C7) is (D9) Remarks) nches):nches):) Living Re (C4) illed Soil	oots (C3)s (C6)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph FAC-Neutr	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2) 5)	wo require
Depth (ir Remarks: Hydric soil not Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Water Table Saturation P	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial In Vegetated Concave vations: er Present? Ye Present? Ye resent? Ye	nagery (B Surface (Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dar Well Dar Depth (i Depth (i	3) is (B14) Odor (C1 heres on liced Iron ction in Ti e (C7) ia (D9) Remarks)) Living Ro (C4) illed Soil	oots (C3)s (C6)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2)	wo require
Depth (ir Remarks: Hydric soil not IYDROLO Wetland Hyde Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Water Table Saturation P (includes cap	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial Ir v Vegetated Concave vations: er Present? Ye Present? Ye present? Ye present? Ye present? Ye	nagery (B Surface (s s s X	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No X No X	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar blain in F Depth (i Depth (i	3) S (B14) Odor (C1 eres on led Iron etion in Tiel (C7) Exa (D9) Remarks) Inches): _ nches): _ nches): _) Living Re (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph FAC-Neutr	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2) 5)	wo require
Popth (in Remarks: Hydric soil not be a soil	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial In Vegetated Concave vations: er Present? Ye Present? Ye resent? Ye	nagery (B Surface (s s s X	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No X No X	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar blain in F Depth (i Depth (i	3) S (B14) Odor (C1 eres on led Iron etion in Tiel (C7) Exa (D9) Remarks) Inches): _ nches): _ nches): _) Living Re (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph FAC-Neutr	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2) 5)	wo require
Pepth (ir Remarks: Aydric soil not be remarks and rema	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial Ir v Vegetated Concave vations: er Present? Ye Present? Ye present? Ye present? Ye present? Ye	nagery (B Surface (s s s	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No X No X	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar blain in F Depth (i Depth (i	3) S (B14) Odor (C1 eres on led Iron etion in Tiel (C7) Exa (D9) Remarks) Inches): _ nches): _ nches): _) Living Re (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph FAC-Neutr	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2) 5)	wo require
Depth (ir Remarks: Remarks: Remarks: Remarks: Remarks: Remarks: Remarks: Remarks: Remary India Surface High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wate Vater Table Remarks: Remarks:	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial Ir v Vegetated Concave vations: er Present? Ye Present? Ye present? Ye present? Ye present? Ye	nagery (B Surface (s s s	Water-Sta Aquatic Fa Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp No X No X No X	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar blain in F Depth (i Depth (i	3) S (B14) Odor (C1 eres on led Iron etion in Tiel (C7) Exa (D9) Remarks) Inches): _ nches): _ nches): _) Living Re (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seaso Crayfish B Saturation Stunted or Geomorph FAC-Neutr	cators (minication) catterns (Bin Water Taurrows (C8) Visible on Stressed Fic Position al Test (D5)	nimum of to (B6) 10) able (C2) 3) Aerial Imae Plants (D1) (D2) 5)	wo require

U.S. Army Corps of Engineers WETLAND DETERMINATION DATA SHEET – Midwest Region See ERDC/EL TR-10-16; the proponent agency is CECW-CO-R

OMB Control #: 0710-0024, Exp:11/30/2024 Requirement Control Symbol EXEMPT: (Authority: AR 335-15, paragraph 5-2a)

Project/Site: Lone Tree Wetland- WOTUS Delineation		City/County:	Johnson, lo	wa	Sa	ampling Date:	4/27/	/2022
Applicant/Owner: Conifer Power				State:	IA Sa	mpling Point:	D	P-3
Investigator(s): Jordan Smith	S	ection, Tow	nship, Range	: S1 T77N F	₹06W			
Landform (hillside, terrace, etc.): Drainage		Loc	al relief (conc	ave, convex,	none): Con	cave		
Slope (%): 1 Lat: 41°29'53.00"		Long: 91°2	29'16.61"		Datu	ım: Iowa Stat	e Plane	North
Soil Map Unit Name: Sperry silt loam (122)				NWI	classificati	on: PEM1B		
Are climatic / hydrologic conditions on the site typical for the	nis time of year	r? Yes	s_X_ N	lo(If	no, explain	in Remarks.)		
Are Vegetation, Soil, or Hydrologysign	ificantly disturb	oed? Are	"Normal Circu	ımstances" pr	resent? Y	es X N	10	
Are Vegetation, Soil, or Hydrologynatu			eeded, explaii	n any answers	s in Remark	(s.)	•	_
SUMMARY OF FINDINGS – Attach site map			point locat	ions, tran	sects, im	portant fe	atures	s, etc.
Hydrophytic Vegetation Present? Yes X No Hydric Soil Present? Yes X No Wetland Hydrology Present? Yes X No Remarks:			impled Area Wetland?	Yes	<u>X</u>	No		
Taken in drainage swale.								
VEGETATION – Use scientific names of plants								
			dicator Status D	ominance Te	est worksh	eet:		
1. Salix interior 2.			ACW	umber of Dor	minant Spec	cies That	2	(A)
3				otal Number o	of Dominan		2	- ` ′ (B)
5.	5 =Tota	l Cover	P	ercent of Don	minant Spec		00.0%	_
Sapling/Shrub Stratum (Plot size: 10)								_ ` '
1			P	revalence In	dex worksl	neet:		
2.			_	Total % C		Multip		_
3				BL species	0	_ x1=	0	_
4				ACW species AC species	80	_ x 2 =	160 6	_
5		I Cover		AC species ACU species		_ x 3 = x 4 =	0	-
Herb Stratum (Plot size: 5)		ii Oovei		PL species	0	_	0	-
1. Phalaris arundinacea	70	Yes F		olumn Totals		(A)	166	– (B)
2. Urtica dioica			FACW	Prevalence	Index = B/A	- ` <i>-</i> -)2	-` ′ -
3			— <u> </u>	ydrophytic V	/egetation	Indicators:		
			— I "		•	Irophytic Vege	etation	
				X 2 - Domina	-		iation	
7.				X 3 - Prevale				
8.						ptations ¹ (Pro	vide sup	pporting
9.			_	data in F	Remarks or	on a separate	e sheet)	1
10.				Problemati	ic Hydrophy	rtic Vegetation	n¹ (Expla	ain)
Woody Vine Stratum (Plot size: 5)	75 =Tota	l Cover			•	nd wetland hy ed or problem		must
1. Vitis vulpina	2	No	EAC	ydrophytic				
2.	2 =Tota	l Cover	🖔	ydropnytic egetation resent?	Yes X	No		
<u> </u>		II COVEI		1696111.	169 /		_	
Remarks: (Include photo numbers here or on a separate Hydrophytic vegetation present. Shown as Photo # 3 in A	,							

SOIL Sampling Point: DP-1

Depth (inches)	Color (moist)	%	Color (moist)	%	Type ¹	Loc ²	Texture	_	Remarks	
0-13	10YR 2/1	93	5YR 4/6	7	С	PL	Loamy/Clayey	Promine	ent redox conce	ntrations
13-32	10YR 4/3	100					Loamy/Clayey			
								_		
		· 								
¹ Typo: C-C	oncentration, D=Dep	lotion PM	——————————————————————————————————————		kod Sand		² l ocati	on: DI –Poro I	ining, M=Matrix	
Hydric Soil		detion, Kivi	=Reduced Matrix, r	vio=ivias	keu San	dialiis.			ematic Hydric S	
Histosol			Sandy Gle	ved Mat	rix (S4)			ast Prairie Red	-	
	pipedon (A2)		Sandy Re					n-Manganese I		
Black Hi			Stripped N					d Parent Mate		
— Hydroge	n Sulfide (A4)		Dark Surfa		,				k Surface (F22)	
	Layers (A5)		Loamy Mu	cky Min	eral (F1)			ner (Explain in		
	ick (A10)		Loamy Gle	-				•	,	
Depleted	d Below Dark Surfac	e (A11)	Depleted I	-						
Thick Da	ark Surface (A12)		X Redox Da	rk Surfac	ce (F6)		³ Indica	tors of hydroph	ytic vegetation	and
Sandy M	lucky Mineral (S1)		Depleted I	Dark Sur	face (F7)		we	tland hydrolog	y must be prese	nt,
5 cm Mu	icky Peat or Peat (S	3)	Redox De	pression	s (F8)		un	ess disturbed	or problematic.	
Restrictive	Layer (if observed)									
-										
Type:										
Type: Depth (in	nches):						Hydric Soil Prese	nt?	Yes X	No
• • • • • • • • • • • • • • • • • • • •	nches):		_				Hydric Soil Prese	nt?	Yes X	No
Depth (in	· -		_				Hydric Soil Prese	nt?	Yes X	No
Depth (in	· -						Hydric Soil Prese	nt?	Yes X	No
Depth (in	· -		<u>_</u>				Hydric Soil Prese	nt?	Yes X	No
Depth (ii Remarks: Hydric soil p	resent.						Hydric Soil Prese	nt?	Yes_X	No
Depth (in	resent.		_				Hydric Soil Prese	nt?	Yes X	No
Depth (ii Remarks: Hydric soil p	resent.						Hydric Soil Prese	nt?	Yes X	No
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India	PGY drology Indicators:		uired; check all that	apply)					Yes X	
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface	resent. PGY drology Indicators: cators (minimum of o		Water-Sta	ined Lea	` '		Second	dary Indicators rface Soil Crac	(minimum of tw	
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa	drology Indicators: cators (minimum of of Water (A1) tter Table (A2)		Water-Sta Aquatic Fa	ined Lea auna (B1	3)		Second Su X Dr:	dary Indicators rface Soil Crac ainage Pattern:	(minimum of two	
Depth (ii Remarks: Hydric soil p HYDROLC Wetland Hy Primary India Surface X High Wa X Saturation	drology Indicators: cators (minimum of of Water (A1) tter Table (A2) on (A3)		Water-Sta Aquatic Fa True Aqua	ined Lea auna (B1 itic Plant	3) s (B14)		Second Su 	dary Indicators rface Soil Crac ainage Pattern y-Season Wate	(minimum of twoks (B6) s (B10) er Table (C2)	
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M	drology Indicators: cators (minimum of of Water (A1) on (A3) larks (B1)		Water-Sta Aquatic Fa True Aqua Hydrogen	ined Lea auna (B1 itic Plant Sulfide (3) s (B14) Odor (C1))	Second Su X Dr. Dr. Cr.	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows	(minimum of twocks (B6) s (B10) er Table (C2) (C8)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer	drology Indicators: cators (minimum of of Water (A1) on (A3) larks (B1) of Deposits (B2)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F	ined Lea auna (B1 itic Plant Sulfide (Rhizosph	3) s (B14) Odor (C1) eres on I) ₋iving Ro	Second Su X Dri Dri Cri	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible	(minimum of two class (B6) s (B10) er Table (C2) (C8) e on Aerial Imag	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatic Water M Sedimer Drift Dep	drology Indicators: cators (minimum of of other Table (A2) on (A3) arks (B1) at Deposits (B2) posits (B3)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu	3) s (B14) Odor (C1) neres on l) _iving Ro C4)	Second Su X Dri Dri Cri Cri Otts (C3) X Sa Stu	dary Indicators rface Soil Crac ainage Patterns y-Season Wate ayfish Burrows turation Visible unted or Stress	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma	drology Indicators: cators (minimum of of water (A1) atter Table (A2) on (A3) arks (B1) att Deposits (B2) oosits (B3) att or Crust (B4)		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc in Reduc	3) s (B14) Odor (C1) neres on I ced Iron () _iving Ro C4)	Second Su X Dr.	dary Indicators rface Soil Crace ainage Patterne y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLC Wetland Hy Primary India Surface X High Wa X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep	drology Indicators: cators (minimum of of water (A1) ater Table (A2) on (A3) arks (B1) at Deposits (B2) osits (B3) at or Crust (B4) osits (B5)	one is requ	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck	ined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc n Reduc	3) ss (B14) Odor (C1) neres on lead Iron (ction in Ties (C7)) _iving Ro C4)	Second Su X Dr.	dary Indicators rface Soil Crac ainage Patterns y-Season Wate ayfish Burrows turation Visible unted or Stress	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLC Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio	drology Indicators: cators (minimum of of water (A1) ater Table (A2) on (A3) arks (B1) at Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial I	one is requ magery (B	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck Gauge or	ined Lea auna (B1 Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat	3) cs (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) ca (D9)) _iving Ro C4)	Second Su X Dr.	dary Indicators rface Soil Crace ainage Patterne y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely	drology Indicators: cators (minimum of of other Table (A2) on (A3) arks (B1) on Deposits (B2) oosits (B3) at or Crust (B4) oosits (B5) on Visible on Aerial I	one is requ magery (B	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck Gauge or	ined Lea auna (B1 Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat	3) cs (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) ca (D9)) _iving Ro C4)	Second Su X Dr.	dary Indicators rface Soil Crace ainage Patterne y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely	drology Indicators: cators (minimum of of of other (A1) atter Table (A2) on (A3) arks (B1) att Deposits (B2) oosits (B3) att or Crust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations:	magery (B e Surface (Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck (57) Gauge or (58) Other (Exp	ined Lea auna (B1 sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) ta (D9) Remarks)) _iving Ro C4)	Second Su X Dr.	dary Indicators rface Soil Crace ainage Patterne y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wat	drology Indicators: cators (minimum of	magery (B e Surface (Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck (57) Gauge or (58) Other (Exp	ined Lea auna (B1 sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) ca (D9) Remarks)) Living Rc (C4) Illed Soils	Second Su X Dr.	dary Indicators rface Soil Crac ainage Pattern y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imaged ed Plants (D1) ition (D2)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatia Sparsely Field Obser Surface Water Water Table	drology Indicators: cators (minimum of of other Table (A2) on (A3) larks (B1) on Deposits (B2) on Visible on Aerial I or Vegetated Concave vations: er Present? Ye Present?	magery (Bes X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 67) Gauge or (B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) sa (D9) Remarks) nches): _nches):) Living Rc (C4) Illed Soils	Second Su X Dr.	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wat Water Table Saturation P	resent. OGY drology Indicators: cators (minimum of of of other (A1) other Table (A2) on (A3) arks (B1) other Deposits (B2) oosits (B3) other Orcust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Yesent? Yesent?	magery (B e Surface (Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 67) Gauge or (B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) ca (D9) Remarks)) Living Rc (C4) Illed Soils	Second Su X Dr.	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wat Water Table Saturation P (includes ca	resent. OGY drology Indicators: cators (minimum of of of other (A1) other Table (A2) on (A3) arks (B1) other Deposits (B2) oosits (B3) other Orcust (B4) oosits (B5) on Visible on Aerial I of Vegetated Concave vations: er Present? Present? Yesent? Yesent?	magery (Bes X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck Gauge or B8) Other (Exp	ined Lea auna (B1 sulfide (Rhizosphof Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) sa (D9) Remarks) nches): nches): nches):) Living Ro C4) Illed Soils	Second	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wat Water Table Saturation P (includes ca	resent. drology Indicators: cators (minimum of	magery (Bes X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck Gauge or B8) Other (Exp	ined Lea auna (B1 sulfide (Rhizosphof Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) sa (D9) Remarks) nches): nches): nches):) Living Ro C4) Illed Soils	Second	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Wat Water Table Saturation P (includes ca	resent. drology Indicators: cators (minimum of	magery (Bes X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck Gauge or B8) Other (Exp	ined Lea auna (B1 sulfide (Rhizosphof Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) sa (D9) Remarks) nches): nches): nches):) Living Ro C4) Illed Soils	Second	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require
Depth (ii Remarks: Hydric soil p HYDROLO Wetland Hy Primary India Surface X High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatia Sparsely Field Obser Surface Water Table Saturation P (includes cal Describe Re	resent. drology Indicators: cators (minimum of	magery (Bes X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck Gauge or B8) Other (Exp	ined Lea auna (B1 sulfide (Rhizosphof Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	3) ss (B14) Odor (C1) neres on I ced Iron (ction in Ti e (C7) sa (D9) Remarks) nches): nches): nches):) Living Ro C4) Illed Soils	Second	dary Indicators rface Soil Crac ainage Pattern: y-Season Wate ayfish Burrows turation Visible unted or Stress omorphic Posi C-Neutral Test	(minimum of two ks (B6) s (B10) er Table (C2) (C8) e on Aerial Imagued Plants (D1) tion (D2) t (D5)	o require

U.S. Army Corps of Engineers WETLAND DETERMINATION DATA SHEET – Midwest Region See ERDC/EL TR-10-16; the proponent agency is CECW-CO-R

OMB Control #: 0710-0024, Exp:11/30/2024 Requirement Control Symbol EXEMPT: (Authority: AR 335-15, paragraph 5-2a)

Project/Site: Lone Tree Wetland-WOTUS Delineation	on	City/Cour	nty: Johnsor	n, Iowa	Sa	ampling Date:	4/27/2022	<u>'</u>
Applicant/Owner: Conifer Power				State:	IA Sa	ampling Point:	DP-4	
Investigator(s): Jordan Smith		Section, T	ownship, Ra	nge: S1 T77N F	R06W			
Landform (hillside, terrace, etc.): Field		L	ocal relief (c	oncave, convex,	none): Non	е		
Slope (%): 1 Lat: 41°29'52.76"		Long: 9	1°29'16.71"		Datı	ım: Iowa State	Plane North	h
Soil Map Unit Name: Sperry silt loam (122)				NW	I classificati	on: None		
Are climatic / hydrologic conditions on the site typic	al for this time of	year?	Yes X	No (If	no, explain	in Remarks.)		
Are Vegetation, Soil, or Hydrology	significantly d	isturbed? A	re "Normal C	circumstances" p				
Are Vegetation, Soil, or Hydrology_			f needed, ex	plain any answer	s in Remarl	(S.)		
SUMMARY OF FINDINGS – Attach site			g point lo	cations, tran	sects, im	portant fea	atures, etc	c.
Hydrophytic Vegetation Present? Yes	No X		Sampled Ar			N. V		
Hydric Soil Present? Yes Wetland Hydrology Present? YesX	No X No	Within	a Wetland?	y Yes		No_X_		
Remarks:		J.						
Taken in Field.								
VEGETATION – Use scientific names of	plants.							
Tree Stratum (Plot size:)	Absolute % Cover	Dominant Species?	Indicator Status	Dominance To	est worksh	eet:		
1 2.				Number of Doi Are OBL, FAC			0 (A)	
3.				Total Number			()	
4				Across All Stra	ata:		2 (B)	
5	=	Total Cover		Percent of Dor Are OBL, FAC			0.0% (A/B	3)
Sapling/Shrub Stratum (Plot size:)							
1.				Prevalence In				
2. 3.		 ·		Total % C	over or: 0	<u>Multipl</u> x 1 =		
4				FACW species		_ x 1 = x 2 =	0	
5.				FAC species	0	_	0	
J		Total Cover		FACU species		_	320	
Herb Stratum (Plot size: 5)		Total Covol		UPL species	0	x 5 =	0	
1. Digitaria sanguinalis	60	Yes	FACU	Column Totals		(A)	320 (B)	
2. Artemisia annua	20	Yes	FACU	Prevalence	Index = B/I	A = 4.0		
3.								
4				Hydrophytic \	egetation /	Indicators:		
5					-	Irophytic Vege	tation	
6				2 - Domina	ance Test is	>50%		
7					ence Index i			
8					-	ptations ¹ (Pro		n
9						on a separate	,	
10				Problemat	ic Hydrophy	tic Vegetation	¹ (Explain)	
Woody Vine Stratum (Plot size:		Total Cover		¹ Indicators of h be present, un				1
1.				Hydrophytic				
2.		Total Cover		Vegetation Present?	Yes	No X		
December (Included to the Control of		TOTAL COVE		110361111		^		
Remarks: (Include photo numbers here or on a see Hydrophytic vegetation not present. Shown as Pho		lix C.						

SOIL Sampling Point: DP-1

Depth	Matrix		Redu	x Featur						
(inches)	Color (moist)	%	Color (moist)	%	Type ¹	Loc ²	Texture	<u> </u>	Remarks	
0-7	10YR 4/3	100					Loamy/Cla	yey		
7-32	10YR 3/2	100					Sandy			
					· -					
							-			
T 0. 0	- D. D. D.	- Com DM	De desert Matrix		1 - 1 0	-1 0	21	tion	a Linia a M. Maria	•
	oncentration, D=Depl Indicators:	etion, Rivi	=Reduced Matrix,	VIS=IVIAS	ked San	d Grains		ocation: PL=Por		
Histosol			Sandy Gle	wod Mat	triv (SA)			Coast Prairie F	•	30115 .
	oipedon (A2)		Sandy Re				_	_	se Masses (F12)	
	istic (A3)		Stripped N				_	Red Parent Ma		
_	en Sulfide (A4)		Dark Surf		0)				Dark Surface (F2	2)
_ · ·	d Layers (A5)		Loamy M	` '	eral (F1)			Other (Explain	•	-)
	uck (A10)		Loamy Gl	-			_		Romanoj	
_	d Below Dark Surface	(A11)	Depleted							
	ark Surface (A12)	(,,,,	Redox Da	•	,		³ lı	ndicators of hydro	ophytic vegetation	n and
	fucky Mineral (S1)		Depleted		` ')			ogy must be pres	
	ucky Peat or Peat (S3)	Redox De		` '	,		•	ed or problemation	
	Layer (if observed):	,		•					·	
Type:										
I VDE.										
Depth (i	nches):						Hydric Soil F	Present?	Yes	No_>
Depth (i	nches):		_				Hydric Soil I	Present?	Yes	No
Depth (i							Hydric Soil I	Present?	Yes	No <u>></u>
Depth (in Remarks:	oil present. DP-4 out						Hydric Soil F	Present?	Yes	No <u>></u>
Depth (ii Remarks: No hydric sc	DGY						Hydric Soil F	Present?	Yes	No_>
Depth (ii Remarks: No hydric so YDROLO Vetland Hy	oil present. DP-4 out	ne is requ	nired; check all that	apply)				Present?		
Depth (in property of the prop	OGY drology Indicators:	ne is requ	nired; check all that Water-Sta		aves (B9)				ors (minimum of t	
Depth (ii Remarks: No hydric so YDROLO Vetland Hy Primary Indi Surface	OGY drology Indicators: cators (minimum of o	ne is requ		ined Lea	` ')		econdary Indicato	ors (minimum of tracks (B6)	
Depth (ii Remarks: No hydric so YDROLO Vetland Hy Primary Indi Surface High Wa	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2)	ne is requ	Water-Sta	ained Lea auna (B1	13)			econdary Indicato Surface Soil C Drainage Patte	ors (minimum of tracks (B6)	
Depth (ii Remarks: No hydric so YDROLO Vetland Hy Primary Indi Surface High Wa X Saturation	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2)	ne is requ	Water-Sta	ained Lea auna (B1 atic Plant	(3) ts (B14)			econdary Indicato Surface Soil C Drainage Patte	ors (minimum of tracks (B6) erns (B10) dater Table (C2)	
Depth (ii Remarks: No hydric so YDROLO Vetland Hy Primary Indi Surface High Wa X Saturatic Water M	OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3)	ne is requ	Water-Sta Aquatic F True Aqua	ained Lea auna (B1 atic Plant Sulfide (13) ts (B14) Odor (C1)	<u>S</u>	econdary Indicato Surface Soil C Drainage Patto Dry-Season W Crayfish Burro	ors (minimum of tracks (B6) erns (B10) dater Table (C2)	wo require
Primary Indi Surface High Water M Sedimel	oil present. DP-4 out OGY Idrology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1)	ne is requ	Water-Sta Aquatic F True Aqua Hydrogen	ained Lea auna (B1 atic Plant Sulfide (Rhizosph	ts (B14) Odor (C1 neres on) Living R	<u>S</u>	econdary Indicato Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi	ors (minimum of the racks (B6) erns (B10) eracks (C2) ws (C8)	wo require
Popth (ii Remarks: No hydric so YDROLO Wetland Hy Primary Indi Surface High Wa X Saturatio Water M Sedimen Drift Dep	oil present. DP-4 out OGY Odrology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2)	ne is requ	Water-Sta Aquatic F True Aqua Hydrogen Oxidized	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Redu	ts (B14) Odor (C1 neres on l) Living R (C4)		econdary Indicato Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi	ors (minimum of the racks (B6) erns (B10) later Table (C2) laws (C8) ble on Aerial Imagessed Plants (D1	wo require
Popth (ii Remarks: No hydric so YDROLO Wetland Hy Primary Indi Surface High Wa X Saturati Water M Sedimer Drift Der Algal Ma	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) posits (B3)	ne is requ	Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc & Surface	ts (B14) Odor (C1 neres on loced Iron oction in Tiee (C7)) Living R (C4)		econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2)	wo require gery (C9)
Primary Indi Saturation Water M Sedimen Drift Dep Algal Ma Iron Dep Inundati	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) darks (B1) at Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial In	nagery (B	Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl 7) Gauge or	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4) illed Soil		econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2)	wo require gery (C9)
Primary Indi Saturation Water M Sedimen Drift Dep Algal Ma Iron Dep Inundati	drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5)	nagery (B	Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl 7) Gauge or	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4) illed Soil		econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2)	wo require gery (C9)
Depth (ii Remarks: No hydric so IYDROLO Wetland Hy Primary Indi Surface High Wa X Saturati Water M Sedimer Drift Der Algal Ma Iron Der Inundati Sparsely	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial In y Vegetated Concave	nagery (B	Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl 7) Gauge or	nined Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4) illed Soil		econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2)	wo require gery (C9)
Primary Indi Surface High Water M Sedimen Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser	drology Indicators: cators (minimum of of of water (A1) ater Table (A2) on (A3) larks (B1) on t Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial In a vegetated Concave evations: ter Present?	nagery (B Surface (Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl 7) Gauge or	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dat plain in F	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks)) Living Ro (C4) illed Soil		econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2)	wo require
Depth (ii Remarks: No hydric so IYDROLO Wetland Hy Primary Indi Surface High Wa X Saturation Water M Sedimen Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser Surface Water Table	oil present. DP-4 out OGY drology Indicators: cators (minimum of or Water (A1) ater Table (A2) on (A3) darks (B1) nt Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial In y Vegetated Concave evations: ter Present? Ye Present? Ye	nagery (B Surface (Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Ird Thin Mucl 7) Gauge or B8) Other (Ex	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dat plain in F	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks) inches):) Living R (C4) illed Soil	Soots (C3)	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre Geomorphic P FAC-Neutral T	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1) osition (D2) lest (D5)	wo require
Depth (ii Remarks: No hydric so IYDROLO Wetland Hy Primary Indi Surface High Wa X Saturatio Water M Sedimel Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser Surface Water Table Saturation F	oil present. DP-4 out OGY Idrology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) Idrks (B1) nt Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial In y Vegetated Concave rvations: ter Present? Ye Present? Ye Present? Ye	nagery (B Surface (Water-Sta Aquatic F True Aqua Hydrogen Oxidized Presence Recent Iro Thin Mucl 7) Gauge or B8) Other (Ex	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc c Surface Well Dat plain in F	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks)) Living R (C4) illed Soil	Soots (C3)	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre	ors (minimum of the racks (B6) erns (B10) erns (C8) ws (C8) ble on Aerial Imagessed Plants (D1 osition (D2) est (D5)	wo require
Depth (in Remarks: No hydric so hydr	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial Ir y Vegetated Concave rvations: ter Present? Ye e Present? Ye eresent? Ye pillary fringe)	nagery (B Surface (s s s X	Water-Sta Aquatic F True Aqua Hydrogen Oxidized I Presence Recent Iru Thin Mucl 7) Gauge or B8) Other (Ex No X No X No X	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar plain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living R (C4) illed Soil	s (C6) Wetland H	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre Geomorphic P FAC-Neutral T	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1) osition (D2) lest (D5)	wo require gery (C9)
Depth (ii Remarks: No hydric so YDROLO Wetland Hy Primary Indi Surface High Wa X Saturatio Water M Sedimen Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser Surface Wa Water Table Saturation P includes ca	oil present. DP-4 out OGY Idrology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) Idrks (B1) nt Deposits (B2) posits (B3) at or Crust (B4) posits (B5) on Visible on Aerial In y Vegetated Concave rvations: ter Present? Ye Present? Ye Present? Ye	nagery (B Surface (s s s X	Water-Sta Aquatic F True Aqua Hydrogen Oxidized I Presence Recent Iru Thin Mucl 7) Gauge or B8) Other (Ex No X No X No X	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar plain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living R (C4) illed Soil	s (C6) Wetland H	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre Geomorphic P FAC-Neutral T	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1) osition (D2) lest (D5)	wo require gery (C9)
Depth (ii Remarks: No hydric so YDROLC Vetland Hy Primary Indi Surface High Wa X Saturati Water M Sedimer Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser Surface Water Table Saturation F Saturation F Sincludes ca	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial Ir y Vegetated Concave rvations: ter Present? Ye e Present? Ye eresent? Ye pillary fringe)	nagery (B Surface (s s s X	Water-Sta Aquatic F True Aqua Hydrogen Oxidized I Presence Recent Iru Thin Mucl 7) Gauge or B8) Other (Ex No X No X No X	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar plain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living R (C4) illed Soil	s (C6) Wetland H	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre Geomorphic P FAC-Neutral T	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1) osition (D2) lest (D5)	wo require gery (C9)
Depth (ii Remarks: Io hydric so YDROLC Vetland Hy Primary Indi Surface High Wa X Saturati Water M Sedimer Drift Dep Algal Ma Iron Dep Inundati Sparsely Field Obser Surface Water Table Saturation P Includes ca Describe Re	oil present. DP-4 out OGY drology Indicators: cators (minimum of o Water (A1) ater Table (A2) on (A3) larks (B1) nt Deposits (B2) cosits (B3) at or Crust (B4) cosits (B5) on Visible on Aerial Ir y Vegetated Concave rvations: ter Present? Ye e Present? Ye eresent? Ye pillary fringe)	nagery (B Surface (s s s X	Water-Sta Aquatic F True Aqua Hydrogen Oxidized I Presence Recent Iru Thin Mucl 7) Gauge or B8) Other (Ex No X No X No X	ained Lea auna (B1 atic Plant Sulfide (Rhizosph of Reduc on Reduc Surface Well Dar plain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living R (C4) illed Soil	s (C6) Wetland H	econdary Indicate Surface Soil C Drainage Patte Dry-Season W Crayfish Burro Saturation Visi Stunted or Stre Geomorphic P FAC-Neutral T	ors (minimum of the racks (B6) erns (B10) later Table (C2) ws (C8) ble on Aerial Imagessed Plants (D1) osition (D2) lest (D5)	wo require gery (C9)

U.S. Army Corps of Engineers WETLAND DETERMINATION DATA SHEET – Midwest Region See ERDC/EL TR-10-16; the proponent agency is CECW-CO-R

OMB Control #: 0710-0024, Exp:11/30/2024 Requirement Control Symbol EXEMPT: (Authority: AR 335-15, paragraph 5-2a)

Project/Site: Lone Tree Wetland- WOTUS Delineation	City/County: Johnson	n, Iowa	Sampling Date:	4/27/2022
Applicant/Owner: Conifer Power		State: IA	Sampling Point:	DP 5
Investigator(s): Jordan Smith	Section, Township, Ra	nge: S1 T77N R06W		
Landform (hillside, terrace, etc.): Swale	Local relief (c	concave, convex, none):	Very slightly convex	(
Slope (%): 2 Lat: 41°30'00.55"	Long: 91°29'17.00"	-	Datum: Iowa State	
Soil Map Unit Name: Sperry silt Ioam (122)			ication: None	
Are climatic / hydrologic conditions on the site typical for this time of	vear? Yes X	No (If no, exp	olain in Remarks.)	
Are Vegetation, Soil, or Hydrology significantly di		Circumstances" present?		
Are Vegetation , Soil , or Hydrology naturally probl		plain any answers in Re		
SUMMARY OF FINDINGS – Attach site map showing				tures, etc.
	T			
Hydrophytic Vegetation Present? Yes X No No	Is the Sampled A		No. V	
Hydric Soil Present? Yes No X Wetland Hydrology Present? Yes X No	within a Wetland	? Yes	No <u>X</u>	
Remarks:				
Point taken in unfarmed field swale between two fields. DP-5.				
VEGETATION - Have size 600 and a second size of				
VEGETATION – Use scientific names of plants.	Dannin ant Indicates			
Absolute <u>Tree Stratum</u> (Plot size:) % Cover	Dominant Indicator Species? Status	Dominance Test wor	ksheet:	
1		Number of Dominant	Species That	
2		Are OBL, FACW, or F	AC:	1 (A)
3		Total Number of Dom	•	4 (D)
5.		Across All Strata:		1 (B)
	Total Cover	Percent of Dominant S Are OBL, FACW, or F	•	0.0% (A/B)
Sapling/Shrub Stratum (Plot size:)				
1		Prevalence Index wo		
2		Total % Cover of		<u>by:</u> 0
3		OBL species 0		0
5.		FAC species 10		00
	Total Cover	FACU species 0		0
Herb Stratum (Plot size: 5)		UPL species 0		0
1. Elymus curvatus 100	Yes FAC	Column Totals: 10	0 (A) 3	00 (B)
2.		Prevalence Index :	= B/A = 3.00	
3				
4		Hydrophytic Vegetat		
5		_	Hydrophytic Vegeta	ation
6		X 2 - Dominance Te		
7		X 3 - Prevalence Inc	dex is ≤3.0° Adaptations¹ (Provi	do oupportin
8			s or on a separate	
10.			ophytic Vegetation ¹	
	Total Cover			
Woody Vine Stratum (Plot size:)	. 5.2 55761	¹ Indicators of hydric so be present, unless dis	•	• • • • • • • • • • • • • • • • • • • •
1		Hydrophytic		
2	Total Cover	Vegetation	V Na	
	Total Cover	Present? Yes	No	-
Remarks: (Include photo numbers here or on a separate sheet.) Hydrophytic vegetation is present. Presented as Photo # 5 in Appe	ndix C.			

SOIL Sampling Point: DP-1

Depth	Matrix		Redo	x Featur							
(inches)	Color (moist)	%	Color (moist)	%	Type ¹	Loc ²	Texture	<u> </u>	Rema	arks	
0-4	10YR 3/2	100					Loamy/Cla	ayey			
4-20	10YR 5/6	100					Loamy/Cla	ayey			
20-32	10YR 4/3	100					Loamy/Cla	ayey			
Turney C. C.	anacatration D. Dan	lotion DM	Doduced Metrix N		lead Can	d Craina	21	Lacation, DI	Doro Lining M	Matrix	
Hydric Soil	oncentration, D=Dep	etion, Rivi	=Reduced Matrix, r	/IS=IVIAS	sked Sand	u Grains			Pore Lining, Mar Problematic H		3.
Histosol			Sandy Gle	ved Mat	trix (S4)		"		ie Redox (A16)	•	•
	pipedon (A2)		Sandy Re				_		nese Masses (
Black His			Stripped M				_		Material (F21)		
	n Sulfide (A4)		Dark Surfa		0)		_		w Dark Surfac		
	Layers (A5)		Loamy Mu	` '	eral (F1)		_		lain in Remarks	. ,	
2 cm Mu	• , ,		Loamy Gle	-			_			-,	
	Below Dark Surface	e (A11)	Depleted I								
	rk Surface (A12)	` ,	Redox Da				³	Indicators of h	ydrophytic vege	etation and	
Sandy M	ucky Mineral (S1)		Depleted I	Dark Sur	face (F7))		wetland hy	drology must be	e present,	
5 cm Mu	cky Peat or Peat (S3	3)	Redox De	oression	ıs (F8)			unless dist	urbed or proble	matic.	
Restrictive	Layer (if observed):										
Type:											
. , , , ,											
Depth (ir	nches):						Hydric Soil	Present?	Yes	No	ь <u>х</u>
-	· ·		_				Hydric Soil	Present?	Yes_	No	<u> </u>
Depth (ir	· ·		_				Hydric Soil	Present?	Yes	No	<u> </u>
Depth (ir Remarks: Hydric soil n	ot present.		_				Hydric Soil	Present?	Yes_	No	> <u>×</u>
Depth (ir	ot present.						Hydric Soil	Present?	Yes_	No.	<u>×</u>
Depth (in Remarks: Hydric soil not be soil	of present. GY drology Indicators:								•		
Depth (ir Remarks: Hydric soil no HYDROLO Wetland Hyd Primary India	ot present. OGY drology Indicators: cators (minimum of o	ne is requ						Secondary Indi	cators (minimu		
Depth (ir Remarks: Hydric soil no HYDROLO Wetland Hyd Primary India Surface	of present. OGY drology Indicators: cators (minimum of o	ne is requ	Water-Sta	ined Lea	` '			Secondary Indi Surface Sc	cators (minimu il Cracks (B6)		
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hyd Primary India Surface High Wa	of present. OGY drology Indicators: cators (minimum of o	ne is requ	Water-Sta Aquatic Fa	ined Lea una (B1	l3)			Secondary Indi Surface So Drainage F	cators (minimu il Cracks (B6) atterns (B10)	m of two re	
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hydrimary India Surface High Wa X Saturatio	of present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3)	ne is requ	Water-Sta Aquatic Fa True Aqua	ined Lea una (B1 tic Plant	(3) ts (B14)			Secondary Indi Surface Sc Drainage F Dry-Seaso	cators (minimu il Cracks (B6) atterns (B10) n Water Table	m of two re	
Depth (in Remarks: Hydric soil not be soil	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1)	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen	ined Lea auna (B1 tic Plant Sulfide (13) ts (B14) Odor (C1)		Secondary Indi Surface So Drainage F Dry-Seasoo Crayfish Bo	cators (minimu il Cracks (B6) atterns (B10) n Water Table (urrows (C8)	m of two re	quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hyd Primary India Surface High Water M Sedimer	ot present. OGY drology Indicators: cators (minimum of	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F	ined Lea auna (B1 tic Plant Sulfide (Rhizosph	ts (B14) Odor (C1 neres on) Living Ro		Secondary Indi Surface So Drainage F Dry-Seasor Crayfish Bu Saturation	cators (minimu il Cracks (B6) atterns (B10) n Water Table (urrows (C8) Visible on Aeria	m of two re (C2)	quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hyd Primary India Surface High Wa X Saturatio Water M Sedimer Drift Dep	of present. OGY drology Indicators: cators (minimum of	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Redu	ts (B14) Odor (C1 neres on l) Living Ro (C4)		Secondary Indi Surface Scomprainage For Dry-Seasor Crayfish Bustantion Stunted or	cators (minimu il Cracks (B6) atterns (B10) n Water Table (urrows (C8) Visible on Aeria Stressed Plant	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hydrimary India Surface High Wa X Saturatic Water M Sedimer Drift Dep Algal Ma	ot present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) ot Deposits (B2) osits (B3) t or Crust (B4)	ne is requ	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc	ts (B14) Odor (C1 neres on loced Iron oction in Ti) Living Ro (C4)		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2)	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hydric Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep	of present. OGY drology Indicators: cators (minimum of		Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4)		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table (urrows (C8) Visible on Aeria Stressed Plant	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hydric Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundation	ot present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) t or Crust (B4) oosits (B5)	magery (B	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4) illed Soil		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2)	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hyd Primary India Surface High Wa X Saturatio Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio	ot present. OGY drology Indicators: cators (minimum of	magery (B	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lead from the ced) Living Ro (C4) illed Soil		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2)	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil not IYDROLO Wetland Hyd Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely	of present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) ot Deposits (B2) osits (B3) t or Crust (B4) osits (B5) on Visible on Aerial In Vegetated Concave vations:	magery (B Surface (Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F	ts (B14) Odor (C1 neres on lection in Tie (C7) ta (D9) Remarks)) Living Ro (C4) illed Soil		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2)	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil not IYDROLO Wetland Hyd Primary India Surface High Wa X Saturatic Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely	ot present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) arks (B1) art Deposits (B2) osits (B3) t or Crust (B4) osits (B5) on Visible on Aerial In Vegetated Concave vations: er Present? Ye	magery (B Surface (Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks)) Living Ro (C4) illed Soil		Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2)	m of two re (C2) al Imagery (quire
Depth (ir Remarks: Hydric soil not IYDROLO Wetland Hydric Surface High Water M Sedimen Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Water Water M Sparsely	ot present. OGY drology Indicators: cators (minimum of or Water (A1) ter Table (A2) on (A3) arks (B1) at Deposits (B2) oosits (B3) t or Crust (B4) oosits (B5) on Visible on Aerial In Vegetated Concave vations: er Present? Ye Present? Ye	magery (B Surface (s s	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat Depth (i Depth (i	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks)) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface Sc Drainage F Dry-Season Crayfish Bu Saturation Stunted or Geomorph	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2) al Test (D5)	m of two re (C2) al Imagery (s (D1)	quire ((C9)
Depth (ir Remarks: Hydric soil no IYDROLO Wetland Hyde Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely Field Obser Surface Water Table	ot present. OGY drology Indicators: cators (minimum of	magery (B Surface (s s	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized Fa Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat Depth (i Depth (i	ts (B14) Odor (C1 neres on lection in Tiele (C7) ta (D9) Remarks) inches):) Living Ro (C4) illed Soil	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seasor Crayfish Bo Saturation Stunted or Geomorph FAC-Neutr	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2) al Test (D5)	m of two re (C2) al Imagery (s (D1)	quire
Depth (ir Remarks: Hydric soil not IYDROLO Wetland Hyd Primary India Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatio Sparsely Field Obser Surface Water Table Saturation P (includes cap	ot present. OGY drology Indicators: cators (minimum of	magery (B Surface (s s X s X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living Ro (C4) illed Soil:	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seasoi Crayfish Bu Saturation Stunted or Geomorph FAC-Neutr	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2) al Test (D5)	m of two re (C2) al Imagery (s (D1)	quire
Depth (in Remarks: Hydric soil not be a surface High Water Mary Depth (in Depth Inundation Sparsely) Field Obser Surface Water Table Saturation Point Depth (includes caped)	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) arks (B1) to Deposits (B2) oosits (B3) t or Crust (B4) oosits (B5) on Visible on Aerial Ir Vegetated Concave vations: er Present? Ye Present? Ye present? Ye present? Ye poillary fringe)	magery (B Surface (s s X s X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living Ro (C4) illed Soil:	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seasoi Crayfish Bu Saturation Stunted or Geomorph FAC-Neutr	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2) al Test (D5)	m of two re (C2) al Imagery (s (D1)	quire
Depth (ir Remarks: Hydric soil not YDROLO Wetland Hydric soil not Surface High Water M Sedimer Drift Dep Algal Ma Iron Dep Inundatic Sparsely Field Obser Surface Water Table Saturation P includes cap Describe Re	ot present. OGY drology Indicators: cators (minimum of o Water (A1) ter Table (A2) on (A3) arks (B1) arks (B1) to Deposits (B2) oosits (B3) t or Crust (B4) oosits (B5) on Visible on Aerial Ir Vegetated Concave vations: er Present? Ye Present? Ye present? Ye present? Ye poillary fringe)	magery (B Surface (s s X s X	Water-Sta Aquatic Fa True Aqua Hydrogen Oxidized F Presence Recent Iro Thin Muck 7) Gauge or B8) Other (Exp	ined Lea auna (B1 tic Plant Sulfide (Rhizosph of Reduc n Reduc Surface Well Dat blain in F Depth (i Depth (i	ts (B14) Odor (C1 neres on lead Iron oction in Ties (C7) ta (D9) Remarks) inches): _ inches): _ inches): _) Living Ro (C4) illed Soil:	oots (C3)	Secondary Indi Surface So Drainage F Dry-Seasoi Crayfish Bu Saturation Stunted or Geomorph FAC-Neutr	cators (minimu il Cracks (B6) atterns (B10) n Water Table urrows (C8) Visible on Aeria Stressed Plant c Position (D2) al Test (D5)	m of two re (C2) al Imagery (s (D1)	quire



Attachment J: Stormwater Management Plan



STORMWATER MANAGEMENT REPORT

Lone Tree Project

October 17, 2023

Prepared for:

PCR Energy 1334 Brittmoore Rd. Suite 1327 Houston, TX 77043

Prepared by:

Stantec 11311 Aurora Ave. Des Moines, IA 50322



Table of Contents

1.0	PROJEC	CT INTRODUCTION	3
1.1	PROJEC	CT BACKGROUND	3
1.2	EXISTIN	IG CONDITIONS	3
1.3	PROPOS	SED CONDITIONS	4
2.0	HYDROI	LOGIC ANALYSIS	4
2.1	RUNOFF	F COEFFICIENTS	4
2.2	TIME OF	CONCENTRATION	5
2.3	PRE-DE	VELOPED VS. POST-DEVELOPED RUNOFF RATES	5
3.0		ULIC ANALYSIS	
3.1	DETENT	TION REQUIREMENTS	5
3.2	MODELI	NG PARAMETERS	5
3.3	WATER	QUALITY SUMMARY	5
5.0	CONCL	USIONS	6
List	of Appe	endices	
APPI	ENDIX A	SOILS MAP	7
APPI	ENDIX B	PRE-DEVELOPED DRAINAGE	8
APPI	ENDIX C	POST-DEVELOPED DRAINAGE	9
APPI	ENDIX D	IMPERVIOUS AREAS	10
APPI	ENDIX E	HYDROGRAPH REPORTS	11

1.0 PROJECT INTRODUCTION

1.1 PROJECT BACKGROUND

The proposed Lone Tree Project is located at the northwest quadrant of the intersection of Highway 22 and Sioux Ave. in Johnson County, Iowa, west of Lone Tree. The project includes construction of approximately 16,308 photovoltaic (PV) solar modules with associated equipment and infrastructure. The 50-acre site is entirely planted row crops with the exception of two drainageways that cross portions of the site along the western border. The areas surrounding the project are also planted row crops. The site primarily sheet flows east to west into the two drainageways and then west Otter Creek, a tributary of the lowa River. This report will detail the existing and proposed development conditions and summarize the proposed water quality treatment volumes to be provided.

Proposed impervious areas, excluding internal roads, equals approximately 458.9 square feet. Per Johnson County regulations, stormwater management planning is not required for sites with a total connected impervious area of less than 5,000 square feet; therefore, stormwater management planning is not required for this project. The chart below details proposed impervious areas:

Impervious Areas							
Area	Area (s.f.)	Area (ac.)					
Inverters (62)	229.4	(3.3.)					
Transformers (3)	46.5						
Switchgear Room (1)	183.0						
Total (without internal roads)	458.9	0.01					
Internals Roads		2.25					
Total		2.26					

The following stormwater management report has been prepared to illustrate the reduction in peak runoff from existing to post-developed conditions.

1.2 Existing Conditions

The entire parcel area is 50 acres located within the lowa River Watershed. The site generally drains from east to west by sheet flow to the identified drainageways; off-site areas to the north sheet flow across the site, and a portion of the rights-of-way or Highway 22 and Sioux Avenue are conveyed by roadside swales to the southernmost drainageway. The two drainageways converge off-site before continuing west into Otter Creek approximately 1 mile upstream of the lowa River. Per the lowa Department of Natural Resources 2018 Impaired Waters Map, Otter Creek is not identified as a Total Max Daily Load (TMDL) Impaired Waterbody, the lowa River is identified as a Total Max Daily Load (TMDL) Impaired Waterbody.

According to the USDA Natural Resource Conservation Service Soils Survey, existing soil types are:



STORMWATER MANAGEMENT REPORT

Map Symbol	Soil Type	Hydrologic Soil Group	Percentage of Site
M162B	Downs silt loam	С	9%
M162C	Downs silt loam	С	1%
291	Atterberry silt loam	C/D	24%
160	Walford silt loam	C/D	12%
122	Sperry silt loam	D	37%
121B	Tama silt loam	С	15%
175B	Dickinson fine sandy loam	Α	2%

The majority of the site consists of soils with a hydrologic soil group of D or C/D (73%), with small areas of group C (25%) soils and one single area of group A soils (2%); given the abundance of D or C/D soils throughout the site, a hydrologic soil group of D was utilized to calculate curve numbers for both pre and post developed conditions.

The area is currently cultivated agriculture with a cover type identified "Row crops, straight row, poor condition". Existing overall site drainage is shown on the enclosed Pre-developed Drainage Exhibit (Appendix B).

1.3 Proposed Conditions

The proposed development will include approximately 16,308 PV solar modules, and 62 power inverters, underground infrastructure, and 12' wide service roads. The site does not currently have stormwater controls. The existing drainage pattern will be preserved after development. The proposed development will improve the existing cultivated land into a vegetated meadow condition and therefore will reduce post-developed runoff rates to less than pre-developed rates as well as reduce pollutant loads to downstream waterways. Per industry standards, solar array areas were considered pervious surface due to panels being elevated off the ground allowing for runoff beneath them.

2.0 HYDROLOGIC ANALYSIS

2.1 RUNOFF COEFFICIENTS

A pre-developed curve number (CN) of 91 was used to represent the existing agricultural site and is classified as "Row crops, straight row, poor condition" with Hydrologic Soil Group (HSG) D. For post-developed conditions, a composite CN of 81 was utilized based on a combination of proposed impervious areas and good condition grass cover with HSG D.

Post-Developed									
Cover Type	CN (HSG D)	Area (ac.)	Weighted CN						
Impervious	98	2.26	4						
Open space, good condition	80	47.74	76						
Composite CN			81						



2.2 TIME OF CONCENTRATION

Travel time for existing conditions was calculated using the NRCS TR-55 method with a combination of sheet, shallow concentrated flow, and channelized flow as observed in the aerial topography. A maximum length of 100 feet of sheet flow was used before transitioning to shallow concentrated flow. The total time of concentration was calculated at 18.1 minutes. The total travel path is shown on the Pre-Developed Drainage exhibit found in Appendix B.

The proposed development will have minimal grading and will maintain the existing drainage patterns and improved ground cover. The time of concentration for post-developed conditions was calculated at 27.6. The travel paths are detailed on the pre- and post-developed drainage exhibits.

2.3 Pre-Developed vs. Post-Developed Runoff Rates

Peak runoff rates were calculated Using the input criteria listed in the sections above for both pre-developed and post-developed conditions for the 5-, 25-, and 100-yr storm events. The reduction in peak runoff rate from pre to post developed conditions is shown below:

	5-Year	25-Year	100-Year
Pre-Developed Peak Runoff Rate (cfs)	116.48	180.24	246.32
Post-Developed Peak Runoff Rate (cfs)	87.94	155.36	228.04
Runoff Rate Reduction (cfs)	28.54	24.88	18.28

3.0 HYDRAULIC ANALYSIS

3.1 Modeling Parameters

Hydrologic modeling was performed using the Hydraflow Hydrographs Extension version 2021 software.. This model uses the Soil Conservation Service (SCS) TR-20 methodology to determine peak flows and runoff volumes.

A Type II 24-hour storm type was selected to model the rainfall distribution across each rainfall event as per the lowa Stormwater Management Manual. Precipitation data was taken from NRCS rainfall distribution data.

3.2 DETENTION REQUIREMENTS

Post-developed peak runoff rates for all storm events have decreased from existing peak rates; peak rate control detention is unwarranted.

3.3 WATER QUALITY SUMMARY

The conversion of cultivated agricultural use to a more densely vegetated meadow-like condition will cause a significant reduction in overall pollution to downstream areas, including a decrease in TSS, nitrogen, and



STORMWATER MANAGEMENT REPORT

phosphorus loading rates. The D and C/D soil groups encountered on site do not allow for infiltration of retained runoff; group C soils allow for very little to negligible infiltration. Due to the soil types encountered on this site, infiltration of runoff is impractical or ineffective. With the reduction in pollutant load, and the site soil conditions, a waiver for water quality retention requirements is requested.

4.0 CONCLUSIONS

The proposed development is designed to maintain existing drainage patterns while improving the site by establishing permanent, good quality, vegetated cover. The improvements will significantly reduce post-developed peak runoff rates and pollutant loads from the existing conditions. in summary, these improvement help contribute to an environmentally sound development.



STORMWATER MANAGEMENT REPORT

APPENDIX A SOILS MAP





APPENDIX B PRE-DEVELOPED DRAINAGE






APPENDIX C POST-DEVELOPED DRAINAGE





APPENDIX D PROPOSED IMPERVIOUS AREAS

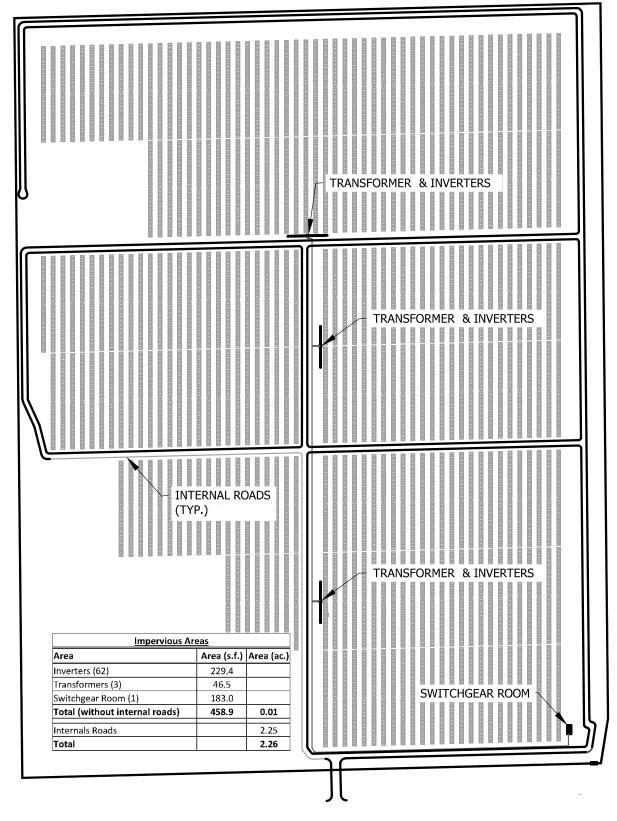



STORMWATER MANAGEMENT REPORT

APPENDIX E HYDROGRAPH REPORTS



Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	116.48	10	730	479,278				Pre-Developed Site
2	SCS Runoff	87.94	2	730	353,233				Post-Developed Site

C:\Users\rlott\OneDrive - Stantec\Documents\\Perients\Per

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

= 24 hrs

Wednesday, 11 / 30 / 2022

= 484


Hyd. No. 1

Pre-Developed Site

Storm duration

Hydrograph type = SCS Runoff Peak discharge = 116.48 cfsStorm frequency = 5 yrsTime to peak $= 12.17 \, hrs$ Time interval = 10 min Hyd. volume = 479,278 cuft Drainage area Curve number = 50.000 ac= 91 Basin Slope = 0.0 %Hydraulic length = 0 ftTc method Time of conc. (Tc) = 18.10 min = TR55 Total precip. = 3.79 inDistribution = Type II

Shape factor

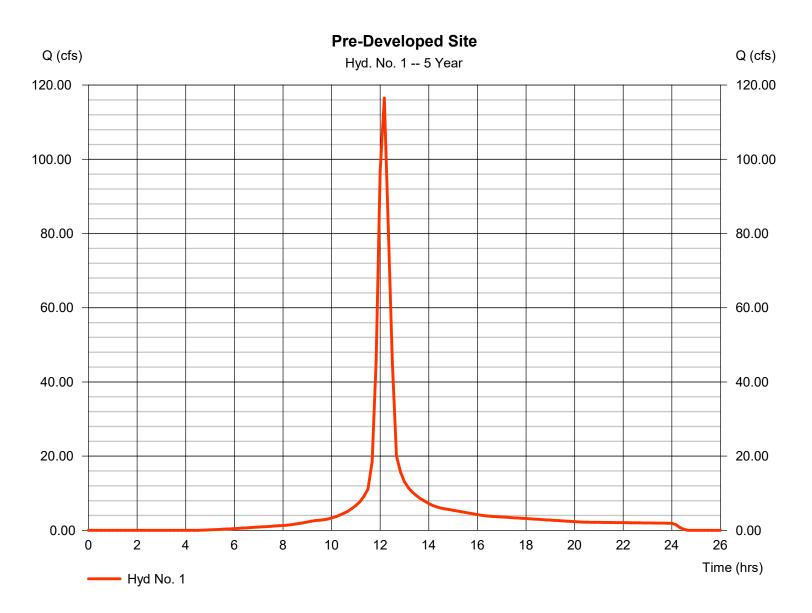

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Hyd. No. 1Pre-Developed Site

<u>Description</u>	<u>A</u>		<u>B</u>		<u>C</u>		<u>Totals</u>
Sheet Flow Manning's n-value Flow length (ft) Two-year 24-hr precip. (in) Land slope (%) Travel Time (min)	= 0.060 = 100.0 = 2.61 = 2.61	+	0.011 0.0 0.00 0.00	+	0.011 0.0 0.00 0.00	=	4.69
maver mine (min)	- 4.03	т	0.00	Т	0.00	_	4.03
Shallow Concentrated Flow Flow length (ft) Watercourse slope (%) Surface description Average velocity (ft/s)	= 1435.00 = 1.53 = Unpaved =2.00		0.00 0.00 Paved 0.00		0.00 0.00 Paved 0.00		
Travel Time (min)	= 11.98	+	0.00	+	0.00	=	11.98
Channel Flow X sectional flow area (sqft) Wetted perimeter (ft) Channel slope (%) Manning's n-value Velocity (ft/s)	= 12.00 = 11.00 = 0.74 = 0.025 =5.43		0.00 0.00 0.00 0.015 0.00		0.00 0.00 0.00 0.015		
Flow length (ft)	({0})462.0		0.0		0.0		
Travel Time (min)	= 1.42	+	0.00	+	0.00	=	1.42
Total Travel Time, Tc							18.10 min

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	180.24	10	730	758,710				Pre-Developed Site
2	SCS Runoff	155.36	2	730	621,112				Post-Developed Site

C:\Users\rlott\OneDrive - Stantec\Documents\\PrejectsPts05009257Yearne Tree Solant\Dursesyd\Stofirn\water\20022aflow\193809077 Lone T

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 11 / 30 / 2022

Hyd. No. 1

Pre-Developed Site

Hydrograph type = SCS Runoff Peak discharge = 180.24 cfsStorm frequency = 25 yrsTime to peak = 12.17 hrsTime interval = 10 min Hyd. volume = 758,710 cuftDrainage area Curve number = 50.000 ac= 91 Hydraulic length = 0 ftBasin Slope = 0.0 %Tc method Time of conc. (Tc) = 18.10 min = TR55 Total precip. = 5.49 inDistribution = Type II Shape factor Storm duration = 24 hrs = 484

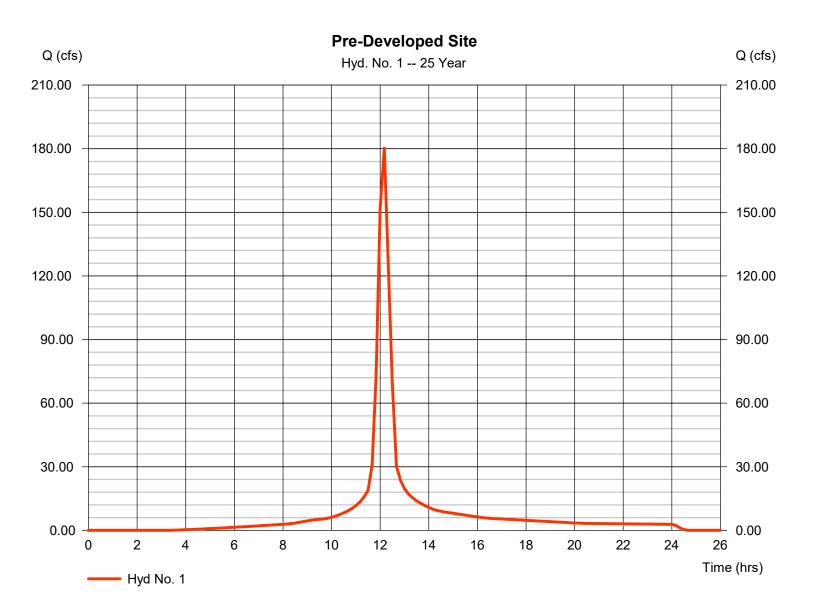

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

lyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	246.32	10	730	1,055,732				Pre-Developed Site
2	SCS Runoff	228.04	2	730	917,800				Post-Developed Site

C:\Users\rlott\OneDrive - Stantec\Documents\\PrejectsPterbot090007\texare Tree Solant\Dursesyd\strongtonn\value\text{tofinh\value\text{tof

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021


Wednesday, 11 / 30 / 2022

Hyd. No. 1

Pre-Developed Site

Hydrograph type = SCS Runoff Peak discharge = 246.32 cfsStorm frequency = 100 yrsTime to peak = 12.17 hrsTime interval = 10 min Hyd. volume = 1,055,732 cuftDrainage area Curve number = 50.000 ac= 91 Hydraulic length Basin Slope = 0.0 %= 0 ft

Tc method = TR55 Time of conc. (Tc) = 18.10 min
Total precip. = 7.27 in Distribution = Type II
Storm duration = 24 hrs Shape factor = 484

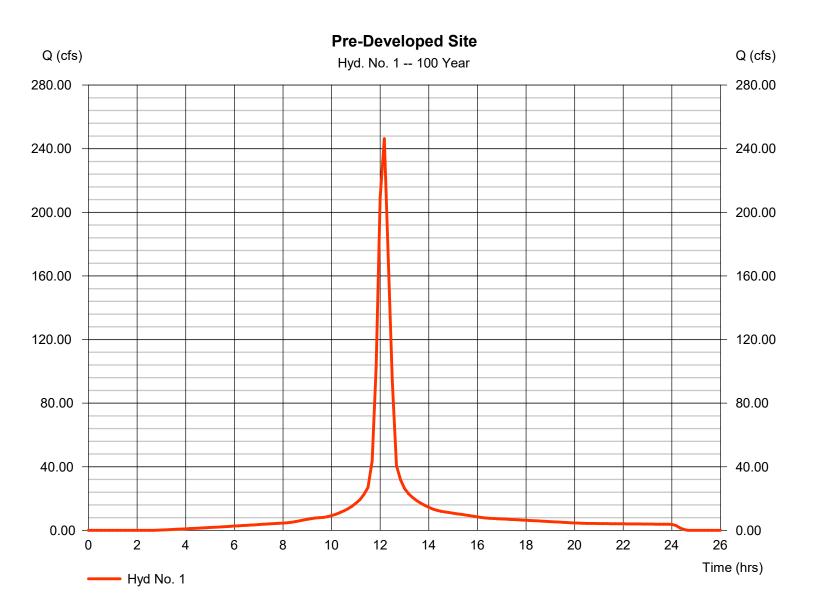



Attachment K: Erosion Control Plan

Erosion Control Plan

Conifer Power Lone Tree Erosion Control
Plan
Highway 22 and Sioux Avenue
Lone Tree, Johnson County, Iowa

September 6, 2023 Terracon Project No. 06227135



Prepared for:

PCR US Investments Corp Houston, Texas

Prepared by:

Terracon Consultants, Inc. Cedar Rapids, Iowa

terracon.com



Environmental Facilities Geotechnical Materials

TABLE OF CONTENTS

1.0	SITE L	OCATIO	ON AND PROJECT DESCRIPTION
	Table 1	I. Site In	formation
2.0	SCOPE	E OF SE	RVICES
	2.1	Erosio	n Control Plan
		2.1.1	Initial Grading, Site Roadwork, and Trenching
			Temporary Erosion and Sediment Controls
		2.1.3	Wet Weather Conditions
		2.1.4	Drain Tile Identification, Avoidance, and Repair
			Permanent Vegetative Cover
		2.1.6	Concrete Washout
3.0	CLOSI	NG	

APPENDICES

APPENDIX A – EXHIBITS

EXHIBIT 1: Site Map

APPENDIX B - INSPECTION FORMS

Erosion Control Plan

Conifer Power Lone Erosion Control Plan ■ Lone Tree, Johnson County, Iowa September 6, 2023 ■ Terracon Project No. 06227135



1.0 SITE LOCATION AND PROJECT DESCRIPTION

Terracon understands that PRC US Investments Corp (the Client) and Conifer Power are preparing preliminary plans to develop the site, located at Highway 22 and Sioux Avenue, with an approximate 7.5-megawatt solar facility. The location of the site is indicated on the attached Exhibit 1.

Table 1. Site Information

2.0 SCOPE OF SERVICES

2.1 Erosion Control Plan

The Erosion Control Plan (ECP) will help to address areas that may affect erosion and sediment disposition at the site. The Site will include all construction areas, areas where equipment may travel, staging areas, hauling roads, areas of access, areas of erosion control measures, tree clearing areas, landscaping areas, as well as borrow and fill areas. The ECP will help to identify critical areas, limit exposed areas, limit time of exposure, control surface water, control sedimentation, and manage stormwater runoff by addressing the following in accordance with SUDAS standard specifications:

- Initial grading, site roadwork, and trenching
- Temporary erosion and sediment controls
- Wet weather conditions
- Drain tile identification
- Permanent vegetative cover

2.1.1 Initial Grading, Site Roadwork, and Trenching

Site grading activities will only occur in select areas where elevations need to be modified to accommodate tracker/racking system slope tolerances, site drainage, access roads, laydown areas, foundations for the MV power station, Switchgear Room and O&M Room. This approach to grading minimizes impacts and/or preserves existing soil and root structures, topsoil nutrients, seed base, and pre-construction site hydrology.

Conifer Power Lone Tree Erosion Control Plan Lone Tree, Johnson County, Iowa September 6, 2023 Terracon Project No. 06227135

Stockpile & Mining Areas

During construction activities (grading and trenching), it may be necessary to stockpile and segregate soils on a temporary basis. Per SUDAS guidance, the stockpiles should be covered when possible, and silt-fences should be placed on the downward side to prevent erosion and sedimentation from the piles. At this time, it is unknown where the stockpiles (if any) will be located on-site. Updated site plans will be provided to the County prior to stockpile placement.

Roadwork

During construction activities, there will be machinery on-site that will utilize access roads. Due to the potential for erosion and sedimentation resulting from vehicular traffic, traffic should be limited to designated roadways within the site when possible.

2.1.2 Temporary Erosion and Sediment Controls

To provide adequate site drainage. Terracon recommends the use of gradient treatments. These gradient treatments are used to decrease runoff velocities, trap sediments locally and increase filtration of water into the soil thus limiting erosion and supporting vegetation growth. Graded surfaces will be roughened prior to seeding to decrease runoff velocity, thereby reducing erosion and aid in establishment of vegetation. If necessary, at periodic intervals not to exceed 200 feet silt fences or rock check dams shall be provided in all collection ditches until vegetation has been established. Actual spacing of silt fences/rock check dams will be adjusted for the steepness of the ditch slope. Silt fences/rock check dams will be maintained in order to assure minimization of silt transportation and cleaned when sediment exceeds one-half the height of the fence. Once vegetation is established, the use of silt fences/rock check damns will not be required. Surface water run-off from stockpile areas will be routed through silt fences/rock check dams to aid in prevention erosion.

A site Drainage Map has been developed to identify the drainage systems associated with the Facility (See Exhibit 1). The mas incorporates Facility structures, roads, and drainage. The maps provide the basis for the erosion control plan measures and should be updated as needed to keep the plan current. Exhibit 1 depicts the surface drainage patterns (red arrows) for the property. A thorough understanding of the area's surface drainage patterns is essential for developing an ECP. Exhibit 1 shows that the solar farm drains to the southwest. This area will utilize silt fencing, and rock check dams to minimize sediment leaving the facility. Rock checkdams will be installed along the apparent drainage on the northwest portion of the site. Spacing and design will be based off of the Statewide Urban Design and Specifications (SUDAS) standard specifications, and actual field conditions. Per the SUDAS standard specifications, the rock check-dams shall not be placed closer than 20-feet apart.

Conifer Power Lone Tree Erosion Control Plan Lone Tree, Johnson County, Iowa September 6, 2023 Terracon Project No. 06227135

2.1.3 Wet Weather Conditions

Site work in wet soil conditions will not begin or continue at times when or locations where the passage of heavy equipment may cause rutting to the point where topsoil and subsoil are mixed. or underground drainage structures could be damaged.

Some activities may be suspended due to the following factors:

- Extent of ponding;
- Extent and depth of soil erosion (rutting, compaction, mixing of soil);
- If unable to reroute site traffic temporarily:
- Type of equipment operating on-site during that time period; and
- Drainage tile avoidance as explained below in section 2.1.4.

If adverse wet weather construction impacts cannot be minimized or managed, work will stop in that applicable area until site conditions improve.

2.1.4 Drain Tile Identification, Avoidance, and Repair

Due to the location of the proposed solar facility in an agricultural area, it is anticipated that draintiles will be encountered during construction activities. The drain tile system aids the site in draining properly, which helps prevent excessive surface runoff. If the drainage tile system is impacted and/or destroyed, it could limit the site's ability to properly drain, resulting in excessive runoff and potential erosion and sedimentation issues. Drain tiles will be identified (to the best extent possible) to assist in avoidance and repairs by field observations. The field observations should be documented and updated as needed.

2.1.5 Permanent Vegetative Cover

Following the completion of construction activities, the Client shall stabilize exposed areas and control runoff using structural or non-structural control measures to minimize onsite erosion and sedimentation and the resulting discharge of pollutants. Terracon recommends that the vegetative cover follow the seeding mixes as shown in the VMP, and as shown below in accordance with SUDAS standard specifications:

SEASON	Scientific Name	Common Name
(March 1 -October 31)	Avena sativa	Seed Oats
	Lolium multiforum	Annual Rye
November 1- February 28)	Avena sativa	Seed Oats
with permanent seed	Lolium multiforum	Annual Rye



Conifer Power Lone Tree Erosion Control Plan Lone Tree, Johnson County, Iowa September 6, 2023 Terracon Project No. 06227135

Furthermore, the seeding mix should be overlain with a natural mulch. Per SUDAS, materials used as mulch may consist of, but are not limited to: dry cereal straw, prairie hay, or wood excelsior made of wood fibers cut from green wood. Materials used as mulch should be free of noxious weeds and seed bearing or root portions of plants. The mulch shall conform to either conventional or hydromulching techniques as referenced in the SUDAS.

2.1.6 Concrete Washout

Concrete washout areas will be determined prior to construction activities. Per the SUDAS guidance, manufactured concrete washout containment may be in the form of a concrete washout container, concrete washout collection bag, or chute washout box. Non-manufactured containment may include a below-grade system or above-grade system. Prohibited concrete washout products include silt fences, unlined hay bales, unlined earthen embankments, and other practices that may allow wash water to leak out of the containment.

3.0 **CLOSING**

An updated erosion and sediment control exhibit will be submitted to the County prior to construction, when specific details, such as grading and stockpile locations will be known.


Terracon appreciates the opportunity to provide services on this project. Please feel free to contact either of the undersigned if you have any questions or require additional information.

Sincerely,

Terracon Consultants, Inc.



APPENDIX A Exhibits

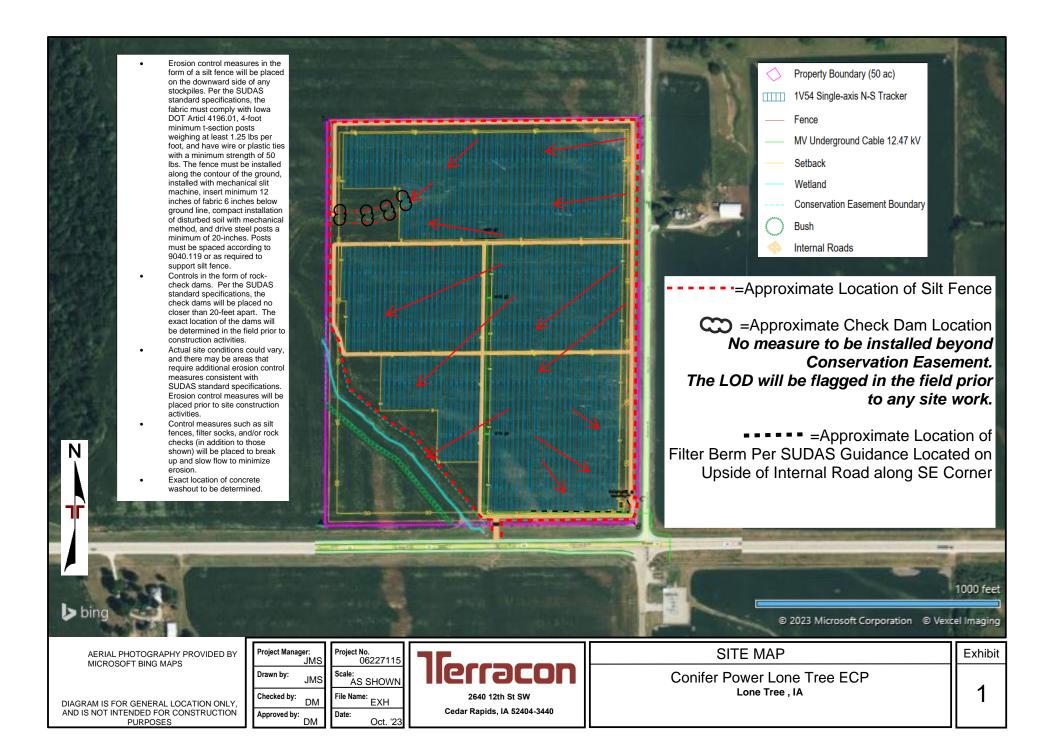



APPENDIX B Inspection Forms

INSPECTION AND MONITORING RECORDS AND SELF-INSPECTION RECORDS

Project Name			
PART 1A: Rainfall Data		PART 1B: Phase(s) of the Plan	
	Rain Amount (inches) Daily Rainfall Required. If no rain,	Check ALL applicable box(es) that apply to completed & current phases	х
	indicate with a "zero"	Initial installation of erosion and sediment control measures	
М		Clearing and grubbing of existing ground cover	
Т		Completion of any grading that requires ground cover	
W		Completion of all land-disturbing activity, construction or development	
Th		Permanent ground cover sufficient to restrain erosion has been established	
F			
Sat (Inspection Optional)			
Sun (Inspection Optional)			
Are there any site or project co	nditions that limit	4	
completion of inspection? If yes, explain conditions and area inaccessible.	as of site that were		
<u> </u>	·		

<u>PART 2: STORMWATER PLANS AND CONTROLS</u>: For each question below, mark the corresponding box as Yes, No or N/A. For all items marked "No", note in Part 3A the Reference letter and provide the Corrective Action and location of the deficiency, the original date noted, and the date it was noted as being corrected. NOTE: Reference letters may be used multiple times.

Reference	Part 2A: Stormwater Pollutant Controls	Yes	No	N/A
С	Are erosion and sediment controls that are shown on the approved plan installed and operating properly with no repairs needed?			
D	Are stormwater controls that are shown on the approved plan installed and operating properly with no repairs needed?			
E	Vehicle Tracking: Are construction entrances operating properly with no repairs needed?			
F	Soil Stabilization: Are areas of the site where construction activities have ceased been properly stabilized within the required timeframes?			
G	Are earthen stockpiles stabilized or otherwise protected from sediment loss, and located at least 50 feet away or downhill from drain inlets and surface waters?			
Reference	Part 2B: Non-Storm Water Pollutant Controls	Yes	No	N/A
Н	Concrete, stucco, paint, etc. washouts: Are washouts installed, properly located, posted and operating with no repairs needed?			
I	Solid & hazardous wastes: Are trash, debris, and hazardous materials properly managed?			
J	Sanitary waste: Are portable toilets properly located and operating with no visible repairs needed?			
K	Equipment and stored fluids: Are fuels, lubricants, hydraulic fluids, etc. contained so as not to enter surface and ground waters?			

For any items listed in the section below, a full description of sedimentation is required in Part 3A. This includes, but may not be limited to: location, estimated amount of sediment that has left the site and/or entered waters, apparent causes of the sediment loss, and what corrective actions need to be taken to prevent this from recurring.

Reference	Part 2C: Sedimentation	Yes	No	N/A
L	Are sediment or other pollutants noted beyond the approved or permitted limits of disturbance?			
M	Are BMPs detected as releasing sediment or other pollutants into receiving waters?			

PART 3A: EROSION AND SEDIMENTATION CONTROL MEASURES: Measures should be inspected at least ONCE PER 7 CALENDAR DAYS AND WITHIN 24 HOURS OF A RAINFALL EVENT EQUAL TO OR GREATER THAN 1.0 INCH PER 24 HOUR PERIOD. Add rows as needed.

Erosion and Sedimentation Control Measures Inspected			Inspection Date	Describe Actions Needed		
Measure ID or Location and Description	Reference(s)	Operating Properly? (Y/N)		Corrective actions should be performed as soon as possible and before the next storm event		

Report unanticipated bypasses, or non-compliance conditions that may endanger health or the environment, to the appropriate DEQ Regional Office via phone call or email within 24 hours of discovery.

PART 3C: GROUND STABILIZATION: Must be recorded, at a minimum, after each phase. Add rows as needed.

Site area description and location where construction activities have temporarily or permanently ceased	Time Limit for Ground Cover (see table below)	Have stabilization measures been installed? (Y/N)	Temporary or Permanent Stabilization (T/P)	Is Ground Cover Sufficient to Restrain Erosion? (Y/N)	Original Inspection Date	Describe Actions Needed Corrective actions should be performed as soon as possible and before the next storm event	Date Previous Action(s) Observed as Corrected

GROUND STABILIZATION TIMEFRAMES (RECOMMENDED)				
Site Area Description	Stabilization	Timeframe Variations		
Perimeter dikes, swales and slopes	7 Days	None		
High Quality Water (HQW) Zones	7 Days	None		
Slopes Steeper than 3:1	7 Days	7 days for perimeter dikes, swales, slopes and HWQ zones		
		14 days for slopes 10 ft or less in length and not steeper than 2:1		
Slopes 3:1 to 4:1	14 Days	7 days for perimeter dikes, swales, slopes and HWQ zones		
		7 days for slopes greater than 50 ft in length		
All other areas with slopes flatter than 4:1	14 Days	7 days for perimeter dikes, swales, slopes and HWQ zones		

PART 3D: NEW OR REVISED MEASURES: Erosion and sedimentation control measures omitted or installed, at a minimum since the last inspection, shall be documented here or by initialing and dating each measure or practice shown on a copy of the approved erosion and sedimentation control plan. Alterations and relocations of measures shall also be documented if they significantly deviate from the approved plan. The removal of measures should also be documented. List dimensions of measures such as Sediment Basins and Dissipator Pads. Add rows as needed. Corrective actions should be included in Part 3A.

Measure ID or Location and Description	Proposed Dimensions (ft.)	Actual Dimensions (ft.)	Significant Deviation* from Plan? (Y/N)	Date measure observed as installed, altered, relocated or removed	Installed (I) Altered (A) Relocated (R) Removed (X)

^{*}Significant deviation means any omission, alteration or relocation of an erosion or sedimentation control measure that prevents it from performing as intended.

PART 4: Signature of Inspector

Financially Responsible Party (FRP) / Permittee				County			
INSPECTOR		Name	Employer				
Inspector Type (Mark)	X	Address					
FRP/Permittee							
Agent/Designee		Phone Number	Email Address				
By this signature, I certify that this report is accurate and complete to the best of my knowledge.							
Financially Responsible	Party	/ / Permittee or Agent / Designee	Date & Time of Inspection				