



SECONDARY ROADS DEPARTMENT

JOHNSON COUNTY ENGINEER
Paul Wittau, P.E.

ASSISTANT COUNTY ENGINEER
Rob Winstead, P.E. & P.L.S.

ASSISTANT COUNTY ENGINEER
Ed Bartels, P.E. & P.L.S.

ASSISTANT COUNTY ENGINEER

ASSISTANT TO THE ENGINEER
Jesse Ward, E.I.

MAINTENANCE SUPERINTENDENT
Kevin Braddock

ASSISTANT MAINTENANCE
SUPERINTENDENT
Shannon Smith

ROADSIDE VEGETATION MANAGER/
WEED COMMISSIONER
Chris Henze

4810 Melrose Avenue West, Iowa City, Iowa 52246

Phone: 319.356.6046

FAX: 319.339.6133

www.johnsoncountyiowa.gov

TRANSMITTAL

Date: 6/18/2025

To Whom It May Concern:

Johnson County Secondary Roads Department is currently taking price quotations for 2025 Rumble Strip Panels installation on F12 (140th St NE) at two different intersections. The Iowa Department of Transportation Standard Specifications for Highway and Bridge Construction, series 2015 plus General Supplemental Specifications; and applicable Supplemental Specifications, Developmental Specifications, and Special Provisions, (hereafter referred to as the Specifications) shall apply to construction on this project. A bond is not required, but a Certificate of Insurance with Johnson County listed as additional insured for 2025 Rumble Strip Panels shall be on file with our office prior to the start of any work on this project. *Additionally, the quotes shall be subject to Johnson County's Buy Local policy, a copy of which is available at the Johnson County Auditor's Office.*

Estimated Quantities:

Item	Item Code	Description	Units	Quantity
10	2527-9263181	PAV'T MARK RMVD	STA	0.30
20	2527-9263209	PAINTED PAV'T MARK, WATERBORNE/SOLVENT	STA	87.67
30	2528-8445110	TRAFFIC CONTROL	LS	1
40	2528-8445113	FLAGGER	EACH	12
50	2529-2242304	CD JNT ASSEMBLY	EACH	6
60	2529-5070110	PATCH, FULL-DEPTH FINISH, BY AREA	SY	233.4
70	2529-5070120	PATCH, FULL-DEPTH FINISH, BY COUNT	EACH	6
80	2529-8202000	RUMBLE STRIP PANEL (IN FULL DEPTH PATCH)	EACH	6
90	2533-4980005	MOBILIZATION	LS	1

Working days: 6

Late Start Date: **August 4th, 2025**

Liquidated damages: \$500.00/day

Please mail, or email your quotation to:

2025 Rumble Strip Panels

Johnson County Secondary Road Department

Attn: Ed Bartels, Assistant County Engineer

4810 Melrose Avenue

Iowa City, Iowa 52246

Telephone: (319) 356-6046

Email: ebartels@johnsoncountyiowa.gov

Quotations will be accepted until Monday, July 1st, 2025 at 4:00 PM.

INSTRUCTIONS FOR 2025 Rumble Strip Panels QUOTATIONS

Rumble Strip Panels: Existing pavement is asphalt, panels to be PCC. See attached sheets B.1 – D.1.

Traffic Control: The Contractor shall be responsible for Traffic Control on this project. Roadways shall remain open to through-traffic at all times during the proposed construction. The Contractor shall open both lanes fully to traffic at the close of each working day. Traffic Control shall comply with the Iowa Department of Transportation “TC” series Standard Road Plans. Proof of Flagger certification is required. All workers within the County Highway Right-of-Way are required to wear High Visibility Safety Apparel (HVSA) that meets the applicable requirements of ANSI/ISEA 107-2020. The Contractor shall submit a proposed Temporary Traffic Control Plan to the Engineer for approval at least five (5) working days prior to beginning work on this project. Traffic Quality Control (Sec. 2528.01.C) is required.

General Instructions: Unit quotes must be typed or shown in ink on the quotation form provided or the quotation will be rejected. The Contractor shall inspect the proposed work locations and become familiar with the type and quantity of work required prior to submittal of a quotation. Quantities shown are for estimating purposes only. The Engineer may increase or decrease quantities at their discretion. The attached maps show the locations of rumble strip panels.

The Contractor shall submit a proposed project schedule to the Engineer for approval at least five (5) working days prior to beginning work on this project. A pre-pour meeting will be held before any concrete placement. Proposed mix designs shall be submitted at least five (5) working days prior to the pre-pour meeting.

Johnson County Secondary Roads
2025 Rumble Strip Panels

Quotation

Item	Item Code	Description	Units	Est. Quantity	Unit Cost	Extended Cost
10	2527- 9263181	PAV'T MARK RMVD	STA	0.30		
20	2527- 9263209	PAINTED PAV'T MARK, WATERBORNE/SOLVENT	STA	87.67		
30	2528- 8445110	TRAFFIC CONTROL	LS	1		
40	2528- 8445113	FLAGGER	EACH	12	\$575.00	\$6,900.00
50	2529- 2242304	CD JNT ASSEMBLY	EACH	6		
60	2529- 5070110	PATCH, FULL-DEPTH FINISH, BY AREA	SY	233.4		
70	2529- 5070120	PATCH, FULL-DEPTH FINISH, BY COUNT	EACH	6		
80	2529- 8202000	RUMBLE STRIP PANEL (IN FULL DEPTH PATCH)	EACH	6		
90	2533- 4980005	MOBILIZATION	LS	1		
					Quote Total=	


By: _____

Date: _____

Company: _____


Title: _____

Use this form when submitting a quotation. Revisions, reservations, or other modifications to this form may result in the quotation being deemed non-responsive.

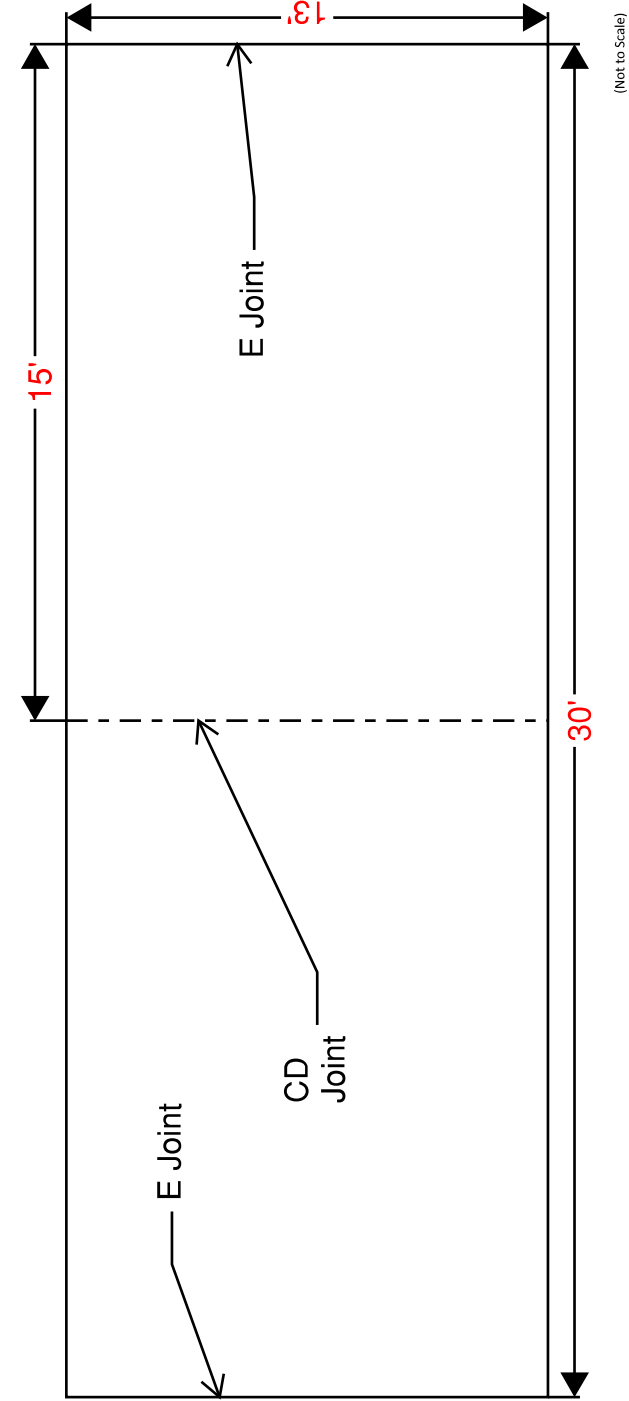

Joint Details

Transverse Joints against existing asphalt pavement shall be Type 'E' 1" Expansion Joints per PV-101. Reference Standard Road Plan PV-10

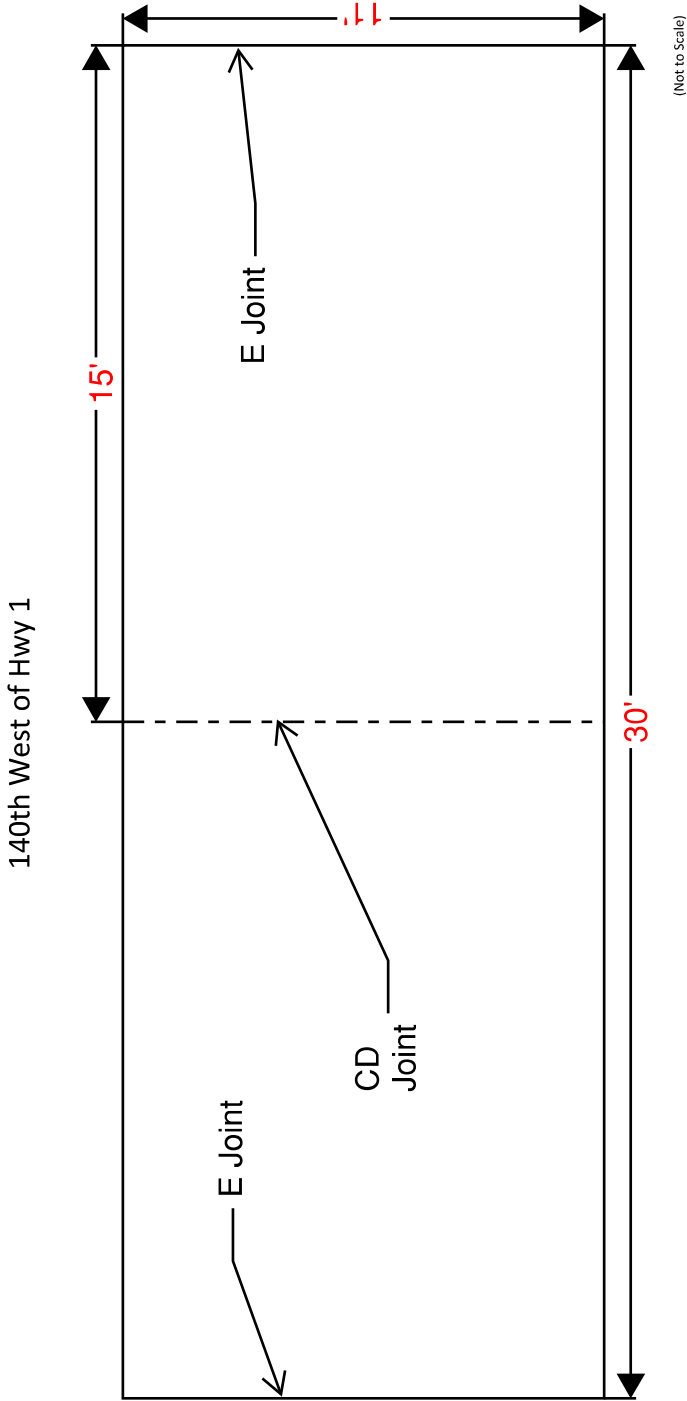

ESTIMATED ROADWAY QUANTITIES (1 DIVISION PROJECT)						JC-100-0A
Item No.	Item Code	Item	Unit	Total	As-Built Qty.	
10	2527-9263181	PAVT MARK RMVD	STA	0.3		
20	2527-9263209	PAINTED PAVT MARK, WATERBORNE/SOLVENT	STA	87.67		
30	2528-8445110	TRAFFIC CONTROL	LS	1		
40	2528-8445113	FLAGGER	EACH	12		
50	2528-2242304	CD JNT ASSEMBLY	EACH	6		
60	2528-5070110	PATCH, FULL-DEPTH FINISH, BY AREA	SY	233.4		
70	2529-5070120	PATCH, FULL-DEPTH FINISH, BY COUNT	EACH	6		
80	2529-8202000	RUMBLE STRIP PANEL (IN FULL DEPTH PATCH)	EACH	6		
90	2533-4880005	MOBILIZATION	LS	1		

Number	Date	Title
PM-110	10-15-25	Line Types
PM-120	10-15-24	Stop Lines and Islands
PR-102	04-21-20	Full Depth PCC Patch Without Dowels
PV-10	04-21-20	Rumble Strip Panel For Intersection Approach
PV-101	04-15-25	Joints
TC-1	10-15-19	Work Not Affecting Traffic (Two-Lane or Multi-Lane)
TC-213	04-18-23	Lane Closure with Flaggers
TC-233	10-17-17	Pavement Marking Operations Two-Lane

ESTIMATE REFERENCE INFORMATION			Item Code	Description
10	2577-9263181	PAV'T MARK RMVD		
		Existing Stop bars at F12 WB at Ely Rd and Hwy 1 / F12 EB & WB to be removed.		
20	2577-9263209	PAINTED PAV'T MARK, WATERBORNE/SOLVENT		
		Refer to tab IC-108-22 on sheet C.2		
30	2578-8445110	TRAFFIC CONTROL		
		Traffic Quality control is required. Use TC-1 on Hwy 1 and W6E in advance of F12.		
40	2578-8445113	FLAGGER		
50	2579-2242304	CD JNT ASSEMBLY		
		Refer to tab IC-102-6C, standard road plans, and Sheet B.1.		
60	2579-5070110	PATCH, FULL-DEPTH FINISH, BY AREA		
		Refer to tabs IC-102-6C, IC-112-7 and standard road plans. See plan sheets B.1 - D.1.		
70	2579-5070120	PATCH, FULL-DEPTH FINISH, BY COUNT		
		Refer to tabs IC-102-6C, IC-112-7 and standard road plans. See plan sheets B.1 - D.1. Contractor to take possession of and legally dispose of existing pavement removed.		
80	2579-8202000	RUMBLE STRIP PANEL (IN FULL DEPTH PATCH)		
		Refer to tabs IC-102-6C, IC-112-7 and standard road plans. See plan sheets B.1 - D.1.		
90	2573-4980005	MOBILIZATION		

[illegible]

 JOHNSON COUNTY	PROJECT NUMBER: 2025 Rumble Strip Panels		DESIGN TEAM: Bartels/Finken	SHEET: C.1	REV:

